



Buy it for looks. Buy it for life.®

#### DESCRIPTION

- Reflex® system offers smooth operation, easy movement, self retraction, and secure docking.
- Metal construction with various finishes identified by suffix
- Quick connect installation
- Pulldown spray with 68" braided hose
- 3/8" compression connections will accept standard ball nose connection for 3/8" tubing
- High arc spout provides height and reach to fill or clean large pots while the pulldown wand provides the maneuverability for cleaning or rinsing

#### OPERATION

- Lever style handle
- Operates with less than 5 lbs. of force
- Operates in stream or spray mode in the pulldown or retracted position

#### FLOW

- Flow is limited to 1.5 gpm (5.7 L/min) at 60 psi

#### CARTRIDGE

- 1255™ Duralast™ cartridge for Single-Handle Faucets
- Engineered polymers, non-ferrous and stainless steel materials

#### STANDARDS

- Third party certified to IAPMO Green, ASME A112.18.1/CSA B-125.1 and all applicable requirements referenced therein including NSF 61/9
- Meets CalGreen and Georgia SB370 requirements
- Contains no more than 0.25% weighted average lead content
- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act


- **ADA**  for lever handle

- The backflow protection system in this device consists of two independently operating check valves, a primary and a secondary which prevent backflow

#### WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations


## Specifications

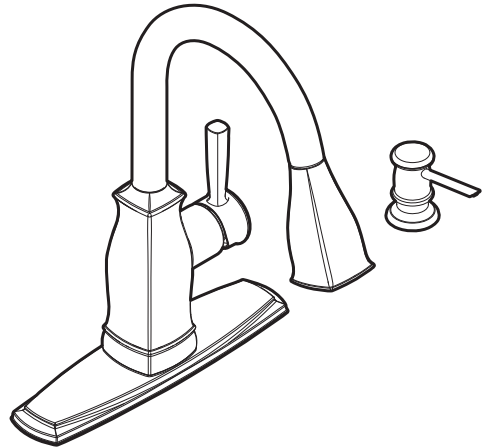

**Single Handle High Arc Pull Down Kitchen Faucet**

**Models:** 87024 series

**NOTE:** THIS FAUCET IS DESIGNED TO BE INSTALLED THRU 1, 2, 3 AND 4 HOLE, 1-1/2" (38mm) MIN. DIA. (1 HOLE FOR SOAP DISPENSER)

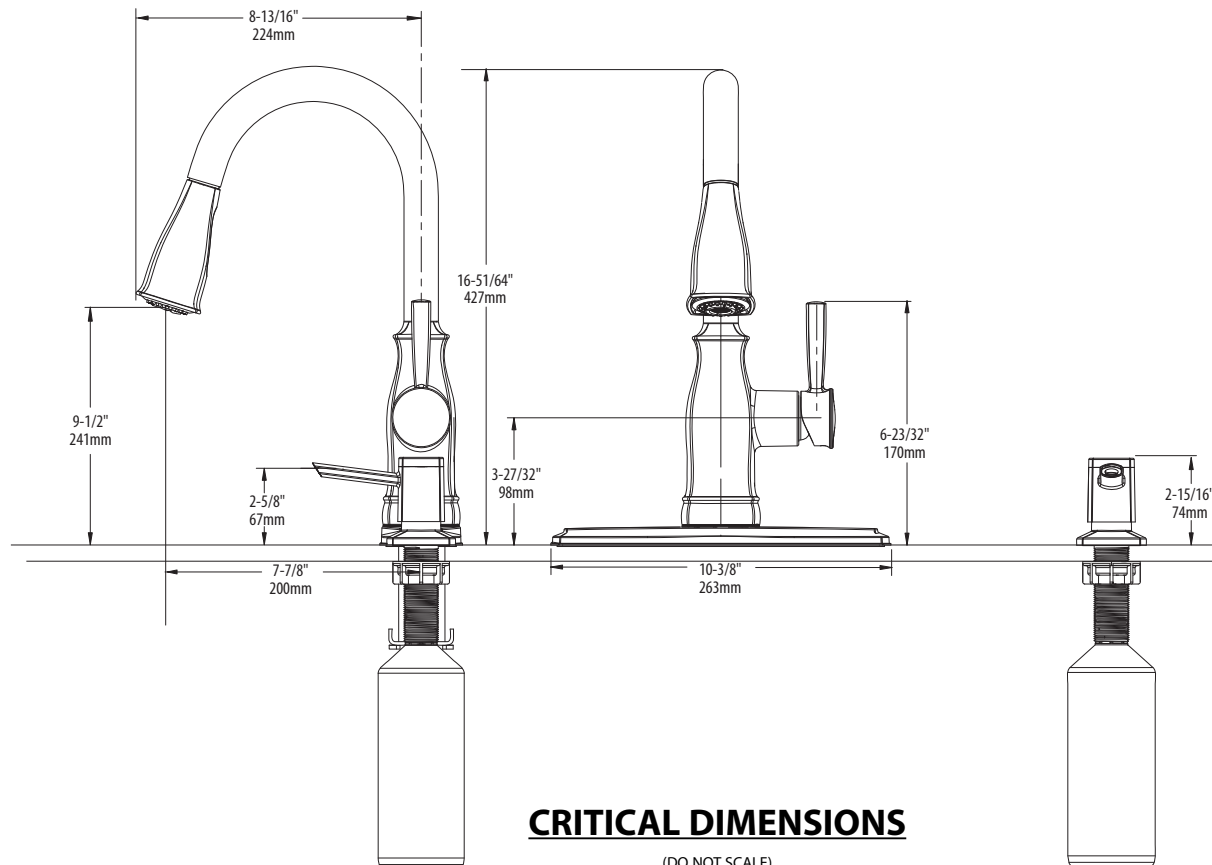

**FOR MORE INFORMATION CALL: 1-800-BUY-MOEN**

**www.moen.com**