

PERFORMANCE™



The new degree of comfort.™

PERFORMANCE™ Atmospheric gas water heaters for manufactured housing are CSA and HUD certified

Efficiency

- .54 - .59 UEF

Performance

- FHR: 60 gallons for 40-gallon model and 59 gallons for 29-gallon model
- Recovery: 32.3 to 34.3 GPH at 90° F rise, depending on model

Longer Life

- Premium grade anode rod provides long-lasting tank protection

Flexibility


- Field convertible controls and burner assembly for natural gas or LP operation included

Altitude Certification

- All models certified up to 8,400 feet above sea level
- High altitude model available for 29-gallon (4,500 to 10,000 ft.)

Low Emissions

- Eco-friendly burner, low NOx design
- Meets 40 ng/J NOx requirements



Draft Diverter

Improved design provides efficient heating with down-draft protection.

Maintenance Free Burner System

- Exclusive air/fuel shut-off device
- Maintenance free – no filter to clean
- Disables the heater in the presence of flammable vapor accumulation

Plus...

- Factory installed temperature and pressure relief valve – side location
- Low lead compliant
- Piezo ignition – easy light pilot, no matches required
- Cold water inlet – side connection allows for quick, economical hook-up
- Optional leg kit for replacement units
- Roof jacks available

Warranty

- 6-Year limited warranty for tank and parts, 1-year full in-home labor warranty*

*See written warranty for complete details

Units meet or exceed ANSI requirements and have been tested according to D.O.E. procedures. Units meet or exceed the energy efficiency requirements of NAECA, ASHRAE standard 90, ICC Code and all state energy efficiency performance criteria.



PERFORMANCE Atmospheric for Manufactured Housing 29 and 40-Gallon Capacities Natural Gas



See specifications chart on back.



The new degree of comfort.™

PERFORMANCE™ Atmospheric for Manufactured Housing Specifications

Fuel Type	Description	Nominal Gallon Capacity	Rated Gallon Capacity	Model Number	Gas Input in Thous. Btu/h	Recovery in G.P.H. 90° F Rise	First Hour Delivery G.P.H.	Ht. to Vent A	Tank Height B	Diam. C	Ht. to Gas Conn. D	Vent Size E	Water Conn. Center F	Ht. to Side T&P Valve G	Ship Weight (LBS)	Energy Factor	Uniform Energy Factor (UEF)
Natural Gas	Tall	40	38	XG40T06MH34U1	34	34.3	60	61-1/2	58-1/2	18-1/2	14-3/8	3 or 4	8	52-1/4	125	0.62	0.59
Natural Gas	Tall	29	28	XG29T06MH32U1	32	32.3	59	59-3/4	56-1/2	16-1/2	14-3/8	3 or 4	8	50-7/8	110	0.63	0.54


Uniform Energy Factor, Energy Factor and rated gallon capacity based on Department of Energy (DOE) requirements.

ROOF JACKS PART NO.	ROOF OPENING TO FLOOR DIM.	ROOF JACK ADJ. RANGE
AP12118B*	98" Min./126" Max.	16" Min./32" Max.
AP12118C*	112" Min./154" Max.	30" Min./60" Max.
AP12118D*	130" Min./189" Max.	48" Min./95" Max.
AP12119B†	94" Min./106" Max.	12"

*Adjustable length roof jacks

†Fixed length roof jacks

Roof jack must be ordered separately with 29 and 40-gallon atmospheric models and must be in accordance with instructions furnished with the heater. Clamps and secure strapping are packed in water heater carton.

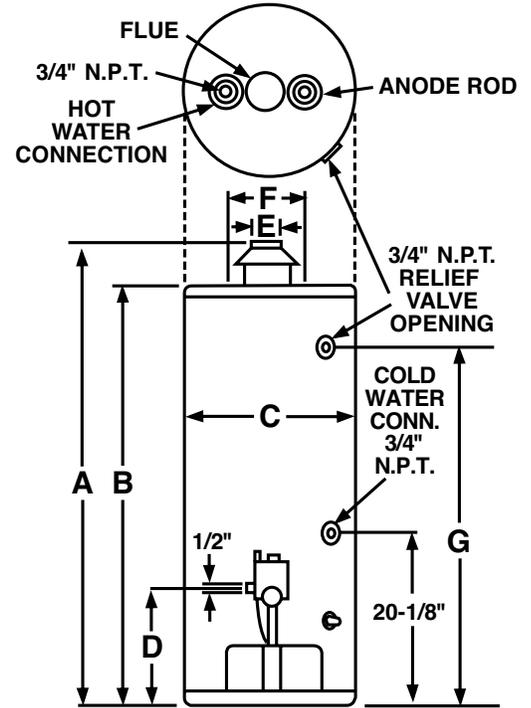

In keeping with its policy of continuous progress and product improvement, Rheem reserves the right to make changes without notice.

Rheem Water Heating • 101 Bell Road
Montgomery, Alabama 36117-4305 • www.rheem.com