


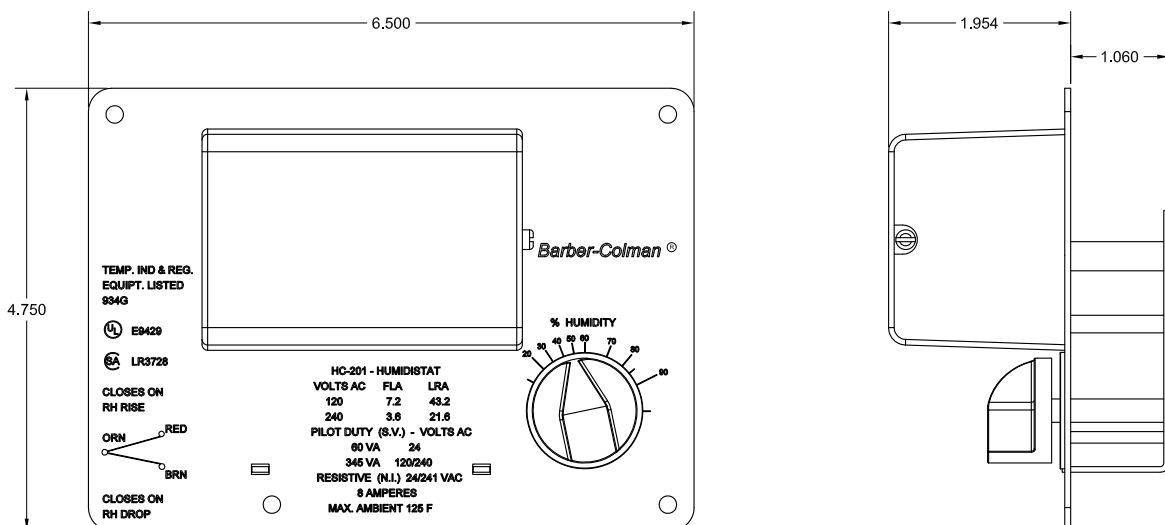

SPECIFICATIONS

MODEL 4594 TWO-POSITION HUMIDISTAT

CONTROL DIAL SETTINGS: 15 TO 95% RH

HUMIDITY SENSING ELEMENT: NYLON RIBBON

DIFFERENTIAL: 5% RH

ENVIRONMENT

AMBIENT TEMPERATURE LIMITS: OPERATING - 40 TO 125°F (4 TO 52°C)

SHIPPING AND STORAGE: -40 TO 140°F (-40 TO 60°C)

HUMIDITY: 5 TO 95% RH NON-CONDENSING.

LOCATIONS: NEMA TYPE 1.

ELECTRICAL SWITCH: ONE SNAP-ACTING SPDT.

RATINGS:	AC VOLT 50 / 60 Hz	FLA	LRA	RESISTIVE AMPS	PILOT DUTY VA
	24	--	--	8	60
	240	3.6	21.6	8	345
	120	7.2	43.2	8	245

CONNECTIONS: COLOR CODED WIRE LEADS.

MOUNTING: IN ANY POSITION ON THE OUTSIDE SURFACE OF RETURN AIR DUCT.

DIMENSIONS: 4-³/₄ H X 6-¹/₂ W X 3-¹/₂ D IN. (121 x 165 x 89 mm)

COVER: METAL

AGENCY LISTINGS: UL