

GreenSource Si Series Model CE Residential Geothermal Heat Pump

Engineering
Submittal
Sheet



BOSCH

Overview and Certifications



Made in
the U.S.A.



Standard Features, Factory Installed Options, and Field Installed Accessories

Standard Features

- ▶ **Available in Horizontal, Vertical, and Counterflow Cabinets**
 - Constructed using white pre-painted galvanized steel
 - Superior corrosion protection for units indoors
 - Standard hanging bracket kits on HZ units for suspending the unit from field supplied hanger rods
- ▶ **Two Stage Compact**
 - Up to 24.5 EER (GLHP)
 - ECM Constant CFM blower fan motors (variable speed) for all unit sizes
- ▶ **Configured as Ordered**
 - Left hand or right hand return air
 - Top, Bottom, or end supply air
 - Copper or Cupro-Nickel Coaxial Coil (CuNi coax coil is recommended in conditions anticipating moderate scale formation or in brackish water)
- ▶ **1/2" Dual Density Fiber Insulation**
 - Non-combustible, non-hydroscopic and does not support fungal growth
 - Meets NFPA 90A and 90B for fire protection
 - Meets the GREENGUARD Indoor Air Quality Standard
 - All panels are insulated using 1.5 lb./cu.ft. density micromat fiberglass insulation for both thermal insulation and noise reduction
- ▶ **Compressors**
 - Floating compressor base pan for quiet operation
 - Scroll type compressors on all sizes
- ▶ **Standard MERV 8 Filter with 4 sided Filter Rack**
- ▶ **TXV (Thermal Expansion Valve)**
 - Improves refrigerant management and efficiencies

Standard Features, Factory Installed Options, and Field Installed Accessories continued..

Standard Features Continued

► **Reliability - Durability - Serviceability**

- Tin plated air coil
- UPM circuit board with communicating features
- Completely serviceable from front of unit as well as insulated bulkheads allow the unit to be serviced during operation

► **Tin Plated Evaporator Coil**

- Tin Electro-Plated Copper Tubing Hair Pins with Aluminum Fins will protect the evaporator coil from most forms of corrosive elements in the airstream

► **Electronic Circuit Board**

The electronic circuit board provides protection with:

- Random Start of Unit
- Anti-Short Cycling (5 minute delay)
- Alarm communicating output
- Low pressure switch bypass at cold water start up

It also monitors and communicates standard safety features/alerts/operation/protection:

- Low Pressure Switch
- High Pressure Switch
- Evaporator Freeze Protection
- Water Coil Freeze Switch
- Condensate Overflow Switch

This circuit board can communicate with a Bosch thermostat that alerts the customer of adverse conditions

► **75 VA Transformer**

► **Warranty**

- 10 year all parts limited warranty
- 10 year labor limited warranty
- For full warranty details: <https://www.bosch-climate.us/support-center/product-warranty-library/residential-heat-pumps-geothermal-warranty-documents.html>

► **Field Configurable Horizontal Discharge Air Conversion**

- The horizontal conversion allows end blow to straight through conversion of discharge air, as factory installed straight through configuration for HZ units is no longer available.

► **Water Connections**

- All water connections are heavy duty bronze FPT fittings securely fastened to the unit corner post

Factory Installed Options

► **Heat Recovery Package (Desuperheater/HRP)**

- This option can be added to allow for supplemental domestic water heating

Field Installed Accessories

► **Thermostats**

- Bosch thermostats are fully customized to meet your individual needs. Bosch offers communicating thermostats that can display alert messages without having to go to the unit.

► **Externally Mounted Duct Heater Kits**

► **Swivel Water Connections**

- 3/4" or 1" FPT Swivel Water Connection

► **Internally Mounted Electric Heater Kits**

- A field installed option for back up heat. Available in 5, 10, 15, or 20 kW depending on the size of the geothermal heat pump.

► **Pump/Valve Relay Kit**

- This relay is used to energize a supply pump or solenoid valve when there is a call for compressor operation. This relay can be used to switch either high or low voltage power.

► **SmartStart Assist Kit**

- An option which provides a means of reducing inrush currents at compressor startup. Light flickering is eliminated, and a smooth start is achieved (only available on scroll compressor models).

► **Stainless Steel Hose Kits**

- Available in various lengths and diameters depending on the need for your application.


► **Flow Center Kits**

Greensource Si Series Model CE Residential Geothermal Heat Pump



BOSCH

Model Nomenclature

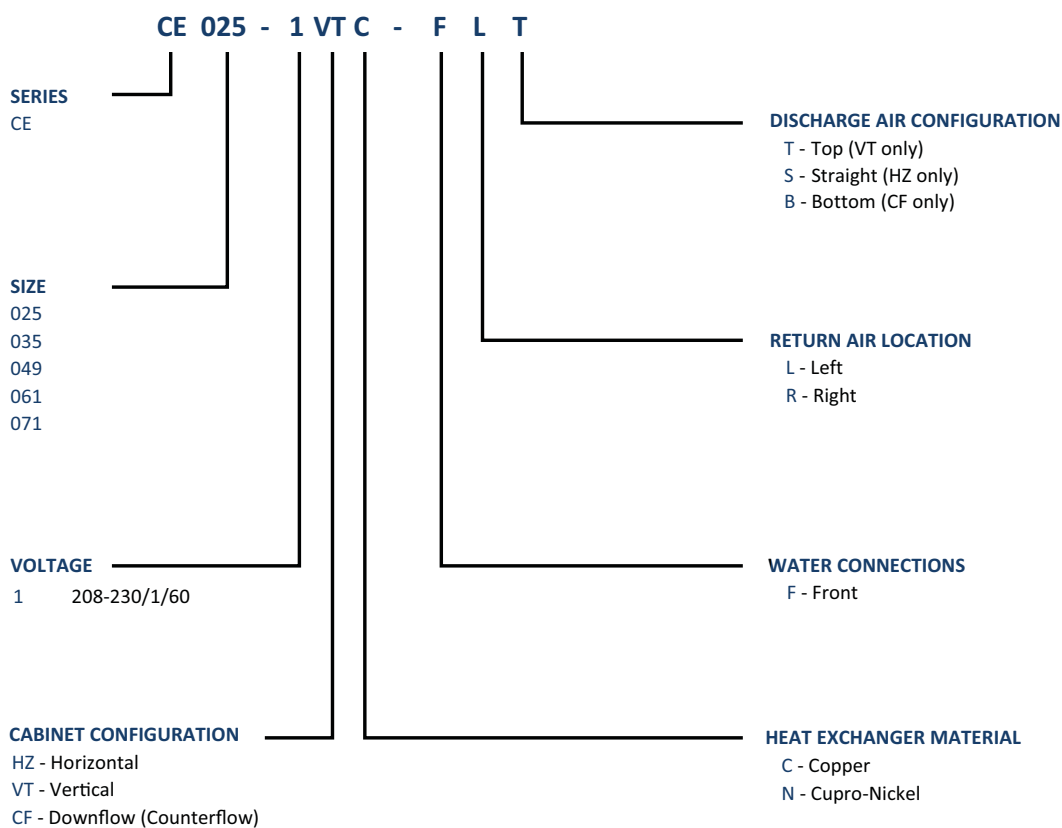

AHRI/ANSI 13256-1 Capacity and Efficiency Data

Models	Load	CFM	GPM	Water Loop				Ground Water				Ground Loop			
				Cooling (86 °F)		Heating (68 °F)		Cooling (59 °F)		Heating (50 °F)		Cooling (77 °F)		Heating (32 °F)	
				Capacity (Btuh)	EER (Btuh/W)	Capacity (Btuh)	COP	Capacity (Btuh)	EER (Btuh/W)	Capacity (Btuh)	COP	Capacity (Btuh)	EER (Btuh/W)	Capacity (Btuh)	COP
CE025	Part	500	6.0	18,800	17.5	20,500	5.1	21,000	30.0	18,000	4.6	20,000	24.5	15,500	4.0
	Full	800	6.0	26,000	16.0	30,000	5.0	29,000	24.0	25,000	4.6	27,500	18.7	19,000	3.8
CE035	Part	900	9.0	24,000	17.0	27,000	5.3	27,000	28.0	22,500	4.5	27,000	24.5	20,500	4.0
	Full	1200	9.0	36,000	14.6	43,000	4.8	42,000	21.6	36,000	4.2	38,000	17.2	28,000	3.8
CE049	Part	1000	12.0	34,000	16.0	39,000	5.4	38,000	24.0	32,000	4.6	36,000	21.8	28,500	4.0
	Full	1600	12.0	48,000	13.2	58,000	4.8	54,000	19.0	48,000	4.2	49,000	15.5	38,000	3.6
CE061	Part	1400	14.0	42,000	17.0	48,000	4.5	48,000	26.0	40,000	4.6	45,000	23.5	36,500	4.0
	Full	1400	14.0	60,000	14.0	72,000	3.8	68,000	19.7	61,000	4.3	62,000	15.7	49,000	3.6
CE071	Part	1400	18.0	51,000	15.8	55,000	4.4	57,000	25.2	47,000	4.0	56,000	21.8	42,000	3.7
	Full	2200	18.0	72,000	14.5	80,000	4.5	77,000	19.6	68,000	4.2	74,000	16.3	53,000	3.5

Greensource Si Series Model CE

Residential Geothermal Heat Pump



BOSCH

Physical Data						
Description	Unit	Value				
		CE025	CE035	CE049	CE061	CE071
Compressor Type (Qty 1)	—	Scroll	Scroll	Scroll	Scroll	Scroll
Max Water Working Pressure	PSIG/kPa	125/861	125/861	125/861	125/861	125/861
ECM Fan Motor & Blower						
Fan Motor Type/Speeds	—	ECM Const Air Flow	ECM Const Air Flow	ECM Const Air Flow	ECM Const Air Flow	ECM Const Air Flow
Fan Motor	HP	0.33	0.50	0.75	1.00	1.00
Blower Wheel Size	Inch (Dia. x W)	9x7	9x7	10x8	11x9	11x9
Water Connection Size						
FPT (Swivel Type)	Inch	1"	1"	1"	1"	1"
Coaxial Coil Volume	Gal	0.46	0.46	0.64	0.74	1.05
Vertical Cabinet						
Refrigeration Charge	Oz	68	68	78	90	111
Air Coil Dimensions	Inch (H x W)	24 X 21	24 X 21	24 X 27	24 X 27	32 X 27
Standard Filter - 1"	Inch (L x H)	24 X 24	24 X 24	24 X 30	24 X 30	16 X 30 (2)
Weight - Operating*	lbs	290	290	318	390	450
Weight - Shipping*	lbs	315	315	348	415	495
Horizontal Cabinet						
Refrigeration Charge	Oz	68	68	78	90	111
Air Coil Dimensions	Inch (H x W)	18 X 28	18 X 28	20 X 32.5	20 X 32.5	20 X 43
Standard Filter - 1"	Inch (L x H)	20 X 30	20 X 30	20 X 34.5	20 X 34.5	20 X 24 (2)
Weight - Operating*	lbs	290	290	318	390	450
Weight - Shipping*	lbs	315	315	348	415	495

* This data reflects standard unit weights only. Additional options may cause differences in listed weights.

Greensource Si Series Model CE

Residential Geothermal Heat Pump



BOSCH

Factory Installed Option - Cupro-Nickel Coil

Model Number with Standard Copper Coil	Model Number with Cupro-Nickel Coil (To add this option to the product, change the model number 10TH digit* to an "N")
CE025-1HZC	CE025-1HZN
CE025-1VTC	CE025-1VTN
CE035-1HZC	CE035-1HZN
CE035-1VTC	CE035-1VTN
CE041-1HZC	CE041-1HZN
CE041-1VTC	CE041-1VTN
CE061-1HZC	CE061-1HZN
CE061-1VTC	CE061-1VTN
CE071-1HZC	CE071-1HZN
CE071-1VTC	CE071-1VTN

* dashes are included as a digit.

Electrical Data (ECM Constant Air (CFM)) Motor

Model	Voltage Code	Voltage/Phase/Hz	Voltage Min/ Max	Compressor			Total Unit w/ Constant CFM Motor		
				QTY	RLA	LRA	FLA	Min Circuit Amps	Max Fuse/ HACR
CE025	1	208-230/1/60	197/253	1	11.7	58.3	2.8	17.4	25
CE035	1	208-230/1/60	197/253	1	15.3	83.0	4.3	23.4	35
CE049	1	208-230/1/60	197/253	1	21.2	104.0	6.8	33.3	50
CE061	1	208-230/1/60	197/253	1	27.1	152.9	9.1	43.0	70
CE071	1	208-230/1/60	197/253	1	29.7	179.2	9.1	46.2	70

Greensource Si Series Model CE

Residential Geothermal Heat Pump



BOSCH

1st Data plate for units with EH field installed kit - compressor power connection

Models	Voltage Code	Voltage/Phase/ Hz	Voltage Min/ Max	Compressor				
				QTY	RLA	LRA	Min Circuit Amps	Max Fuse/ HACR
CE025	1	208-230/1/60	197/253	1	11.7	58.3	14.6	25
CE035	1	208-230/1/60	197/253	1	15.3	83.0	19.1	30
CE049	1	208-230/1/60	197/253	1	21.2	104.0	26.5	45
CE061	1	208-230/1/60	197/253	1	27.1	152.9	33.9	60
CE071	1	208-230/1/60	197/253	1	29.7	179.2	37.1	60

2nd data plate for units with EH field installed kit - Constant Airflow ECM motor

Model	Electric Heater Rated kW	Stage	Heater Watts		Heater Amps		Motor FLA (A)	Circuit	MCA		MOCP	
			240V	208V	240V	208V		Fuses	240V	208V	240V	208V
CE025	4.8	1	4,800	3,600	20.0	17.3	2.8	-	28.5	25.1	30	30
CE035	4.8	1	4,800	3,600	20.0	17.3	6.8	-	33.5	30.1	35	35
CE035	9.6	1	9,600	7,200	40.0	34.6	6.8	-	58.5	51.8	60	60
CE049	4.8	1	4,800	3,600	20.0	17.3	6.8	-	33.5	30.1	35	35
CE049	9.6	1	9,600	7,200	40.0	34.6	6.8	-	58.5	51.8	60	60
CE049	14.4	2	14,400	10,800	60	51.9	6.8	F1/F2	83.5	73.4	90	80
								F3/F4				
CE061	4.8	1	4,800	3,600	20.0	17.3	9.1	-	36.4	33.0	40	35
CE061	9.6	1	9,600	7,200	40.0	34.6	9.1	-	61.4	54.6	70	60
CE061	14.4	2	14,400	10,800	60	51.9	9.1	F1/F2	86.4	76.3	90	80
								F3/F4				
CE061	19.2	2	19,200	14,000	80	69.2	9.1	F1/F2	111.4	97.9	125	100
								F3/F4				
CE071	4.8	1	4,800	3,600	20.0	17.3	9.1	-	36.4	33.0	40	35
CE071	9.6	1	9,600	7,200	40.0	34.6	9.1	-	61.4	54.6	70	60
CE071	14.4	2	14,400	10,800	60	51.9	9.1	F1/F2	86.4	76.3	90	80
								F3/F4				
CE071	19.2	2	19,200	14,000	80	69.2	9.1	F1/F2	111.4	97.9	125	100
								F3/F4				

Greensource Si Series Model CE

Residential Geothermal Heat Pump



BOSCH

Blower Performance ECM (Constant Air (CFM)) Motor														
Model	Fan Speed	Rated Airflow	Adjust	Tap	Available External Static Pressure (in. wc. Wet coil and filter included)									
					0.10	0.20	0.30	0.40	0.50	0.60	0.70	0.80	0.90	1.00
025 Part Load	Hi	600	+	A	600	600	600	600	600	600	600	600	-	-
	Med	500	Normal	A	500	500	500	500	500	500	500	500	-	-
	Low	425	-	A	425	425	425	425	425	425	425	425	-	-
025 Full Load	Hi	900	+	A	900	900	900	900	900	900	900	900	-	-
	Med	800	Normal	A	800	800	800	800	800	800	800	800	-	-
	Low	700	-	A	700	700	700	700	700	700	700	700	-	-
035 Part Load	Hi	920	+	A	920	920	920	920	920	920	920	920	920	920
	Med	800	Normal	A	800	800	800	800	800	800	800	800	800	800
	Low	680	-	A	680	680	680	680	680	680	680	680	680	680
035 Full Load	Hi	1400	+	A	1400	1400	1400	1400	1400	1400	1400	1400	1400	1400
	Med	1200	Normal	A	1200	1200	1200	1200	1200	1200	1200	1200	1200	1200
	Low	1000	-	A	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000
049 Part Load	Hi	1150	+	B	1150	1150	1150	1150	1150	1150	1150	1150	1150	1150
	Med	1000	Normal	B	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000
	Low	850	-	B	850	850	850	850	850	850	850	850	850	850
049 Full Load	Hi	1800	+	B	1800	1800	1800	1800	1800	1800	1800	1800	1800	1800
	Med	1600	Normal	B	1600	1600	1600	1600	1600	1600	1600	1600	1600	1600
	Low	1400	-	B	1400	1400	1400	1400	1400	1400	1400	1400	1400	1400
061 Part Load	Hi	1470	+	A	1470	1470	1470	1470	1470	1470	1470	1470	1470	1470
	Med	1400	Normal	A	1400	1400	1400	1400	1400	1400	1400	1400	1400	1400
	Low	1330	-	A	1330	1330	1330	1330	1330	1330	1330	1330	1330	1330
061 Full Load	Hi	2100	+	A	2100	2100	2100	2100	2100	2100	2100	2100	2100	2100
	Med	2000	Normal	A	2000	2000	2000	2000	2000	2000	2000	2000	2000	2000
	Low	1900	-	A	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900
071 Part Load	Hi	1850	+	A	1850	1850	1850	1850	1850	1850	1850	1850	1850	1850
	Med	1600	Normal	A	1600	1600	1600	1600	1600	1600	1600	1600	1600	1600
	Low	1360	-	A	1360	1360	1360	1360	1360	1360	1360	1360	1360	1360
071 Full Load	Hi	2300	+	A	2300	2300	2300	2300	2300	2300	2300	2300	2300	2300
	Med	2200	Normal	A	2200	2200	2200	2200	2200	2200	2200	2200	2200	2200
	Low	1900	-	A	1900	1900	1900	1900	1900	1900	1900	1900	1900	1900

Greensource Si Series Model CE Residential Geothermal Heat Pump



BOSCH

Operating Limits - Cooling & Heating	
Description	Standard Unit
COOLING	
Minimum ambient air temperature °F	50
Maximum ambient air temperature °F	100
Minimum evaporator entering air db/wb °F	68/57
Rated air coil entering air db/wb °F	80/67
Maximum evaporator entering air db/wb °F	95/85
Minimum water coil entering fluid temperature °F	40
Water loop typical coil entering fluid range temperature °F	70/90
Maximum water coil entering fluid temperature °F	110
HEATING	
Minimum ambient air temperature °F	40
Maximum ambient air temperature °F	85
Minimum evaporator entering air db °F	50
Rated air coil entering air °F	68
Maximum evaporator entering air db °F	80
Normal water coil entering fluid range °F	25-80*
Minimum water coil entering Fluid °F	20*


* antifreeze solution is required below 45°F entering fluid temperatures.

Greensource Si Series Model CE Residential Geothermal Heat Pump



BOSCH

CE Vertical Unit Dimensions and Connections

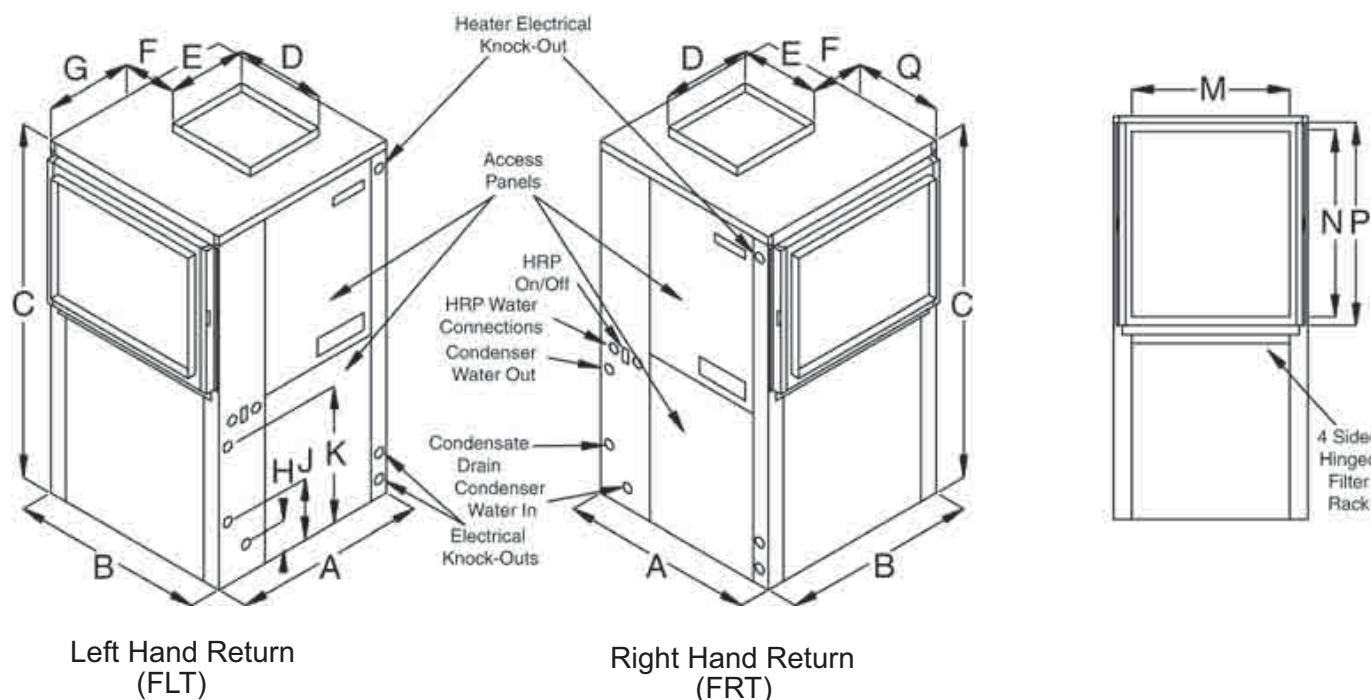

CE-Vertical Dimensions and Connections

Model	A	B	C	D	E	F	G	H	J	K	M	N	P	Q	Condenser Water Connections (Swivel Type)	Recommended Replacement Normal Filter Size
	Width	Depth	Height	Dis-charge Depth	Dis-charge Width	Cabinet Edge to Dis-charge	Left Side to Dis-charge	Water In	Bottom to Condensate Drain	Water Out	R/A Duct Width	R/A Duct Flange Height	Filter Rack Height	Right Side to Dis-charge		
CE025	21.50	26.00	47.25	13.75	15.75	6.13	5.25	2.50	8.00	13.50	22.00	22.00	24.00	4.00	3/4" FPT	24 X 24
CE035	21.50	26.00	47.25	13.75	15.75	6.13	5.25	2.50	8.00	13.50	22.00	22.00	24.00	4.00	3/4" FPT	24 X 24
CE049	24.00	32.75	47.25	15.75	15.75	8.38	5.50	2.50	8.00	14.75	28.50	22.00	24.00	4.00	1" FPT	24 X 30
CE061	26.00	33.25	51.25	17.75	17.75	7.13	6.25	2.50	8.00	14.75	28.50	22.00	24.00	4.00	1" FPT	24 X 30
CE071	26.00	33.25	58.25	17.75	17.75	8.00	7.75	2.50	8.00	14.75	28.50	30.00	32.00	1.50	1" FPT	16 X 30 (2)




All dimensions within +/- 0.125". Specifications subject to change without notice.

Greensource Si Series Model CE Residential Geothermal Heat Pump



CE Horizontal Unit Dimensions and Connections

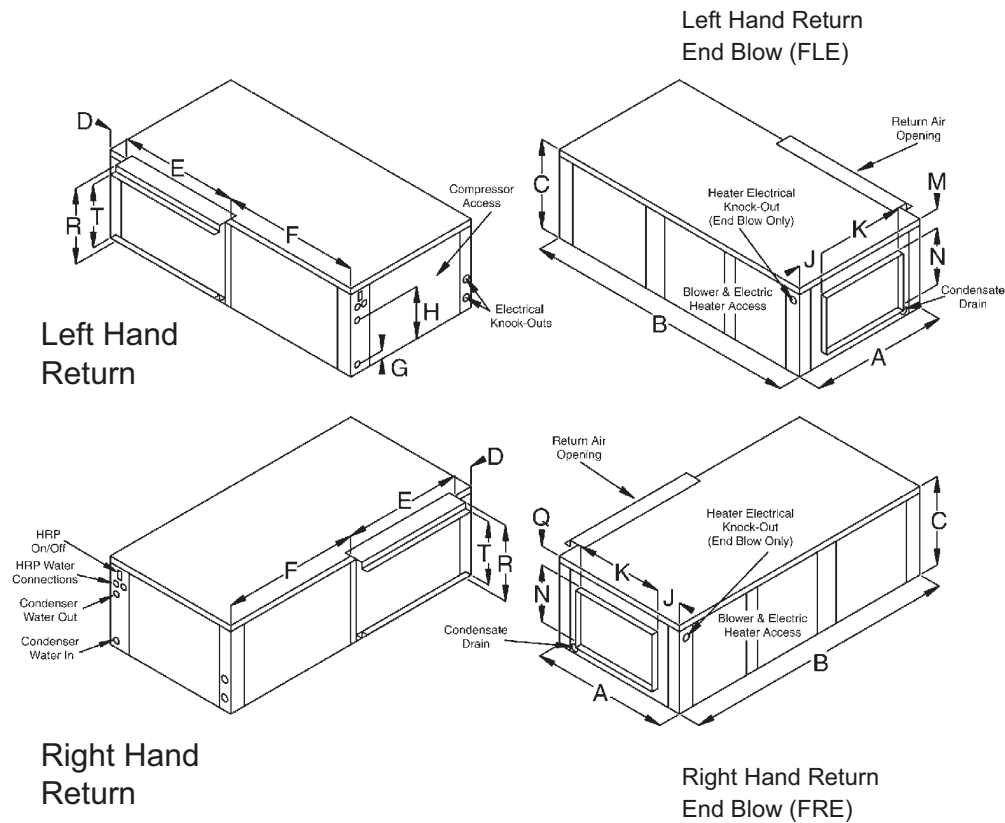

CE - Horizontal Dimensions and Connections

Model	A	B	C	D	E	F	G	H	J	K	M	N	P	Q	R	T	Condenser Water Connections (Swivel Type)	Recommended Replacement Normal Filter Size
	Width	Depth	Height	Cab End to Filter Rack	"R/A Duct Width"	Cab Front to Filter Rack	Water In	Water Out	Side to Dis-charge	Dis-charge Width	Top to Dis-charge (FLE & FRS)	Dis-charge Height	End to Dis-charge	Top to Dis-charge (FRE & FLS)	Filter Rack Height	R/A Duct Flange Height		
CE025	26.00	54.50	21.75	2.00	30.00	22.50	2.50	13.50	4.50	13.75	3.00	15.75	4.50	3.00	20.00	18.00	3/4" FPT	20 X 30
CE035	26.00	54.50	21.75	2.00	30.00	22.50	2.50	13.50	4.50	13.75	3.00	15.75	4.50	3.00	20.00	18.00	3/4" FPT	20 X 30
CE049	30.00	68.00	21.75	2.50	33.50	32.00	2.50	14.50	5.81	15.75	3.00	15.75	5.81	2.00	20.00	18.00	1" FPT	20 X 34.5
CE061	30.00	68.00	21.75	2.50	33.50	32.00	2.50	14.50	7.66	17.75	2.00	17.75	7.66	2.00	20.00	18.00	1" FPT	20 X 34.5
CE071	30.00	78.00	21.75	2.50	44.00	31.50	2.50	14.50	3.50	17.75	2.75	17.75	7.66	1.00	20.00	18.00	1" FPT	20 X 24 (2)




All dimensions within $\pm 0.125"$. Specifications subject to change without notice.

Greensource Si Series Model CE Residential Geothermal Heat Pump



CE Counterflow Unit Dimensions and Connections

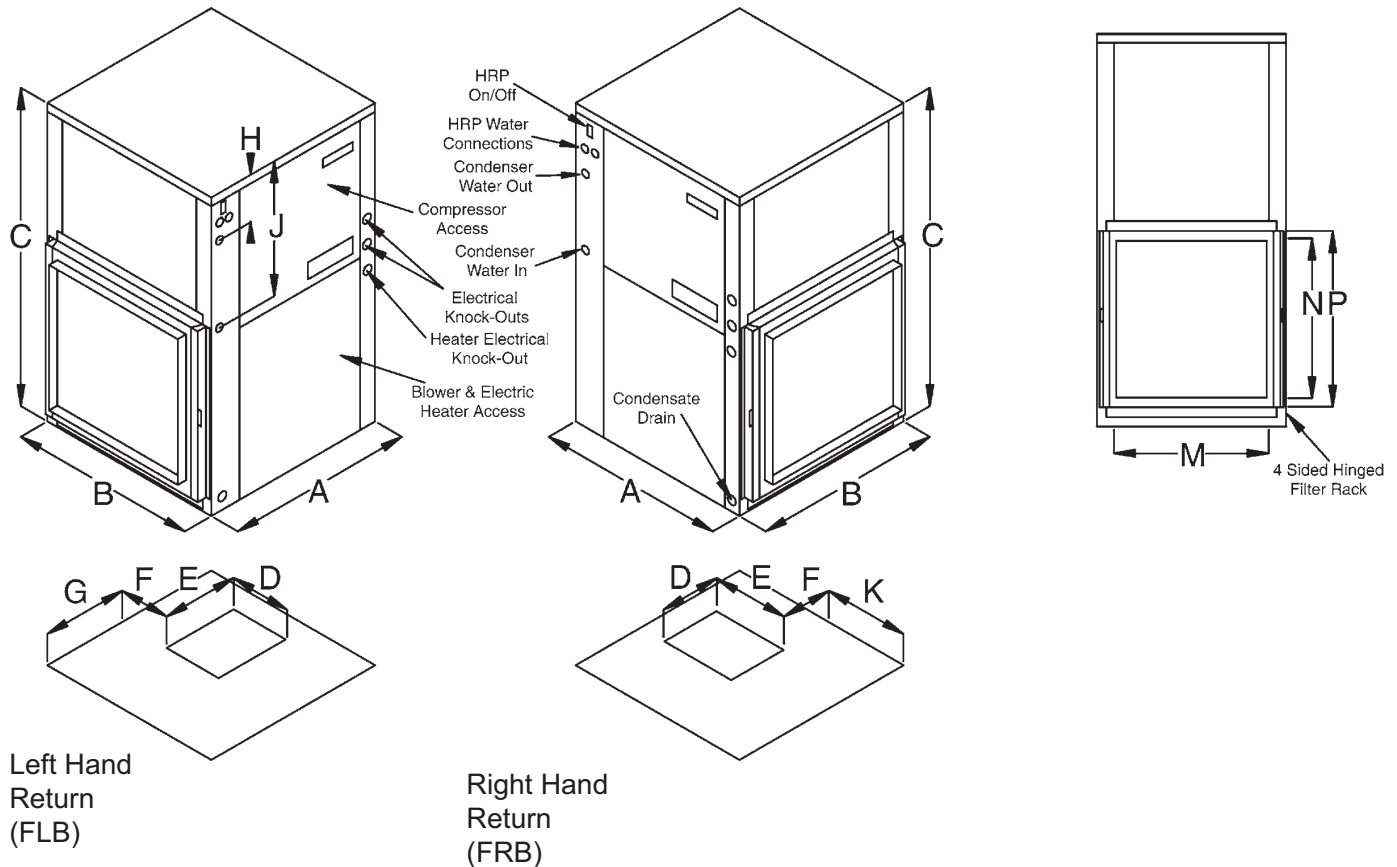

CE - Counterflow Dimensions and Connections

Model	A Width	B Depth	C Height	D Dis- charge Depth	E Dis- charge Width	F Cabinet Edge to Dis- charge	G Left Side to Dis- charge	H Water Out	J Water In	K Right Side to Dis- charge	M "R/A Duct Width"	N "R/A Duct Flange Height"	P "Filter Rack Height"	Condenser Water Connections (Swivel Type)	Recommended Replacement Normal Filter Size
CE025	21.50	26.00	47.25	9.25	10.25	6.00	5.50	8.50	19.50	9.75	22.00	22.00	24.00	3/4" FPT	24 X 24
CE035	21.50	26.00	47.25	9.25	10.25	6.00	5.50	8.50	19.50	9.75	22.00	22.00	24.00	3/4" FPT	24 X 24
CE049	24.00	32.75	47.25	10.75	11.50	11.13	6.88	7.50	18.50	8.75	28.00	22.00	24.00	1" FPT	24 X 30
CE061	26.00	33.25	51.25	12.00	12.50	8.38	5.00	9.75	21.75	10.50	28.00	22.00	24.00	1" FPT	24 X 30
CE071	26.00	33.25	58.25	12.75	13.50	9.75	4.50	7.00	20.25	11.00	28.00	30.00	32.00	1" FPT	16 X 30 (2)




All dimensions within $\pm 0.125"$. Specifications subject to change without notice.




CE Service Clearances

**Vertical Unit
Service Clearances**

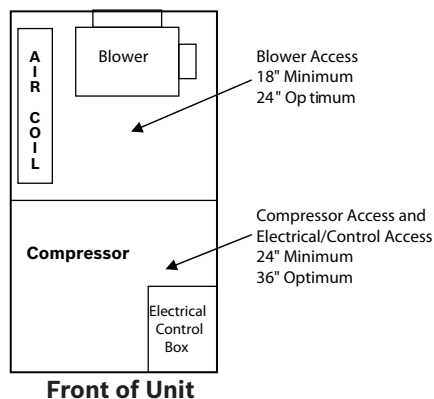

NOTE: The local electric codes may require 36" or more clearance at the electrical control box.

**Horizontal Unit
Service Clearances**

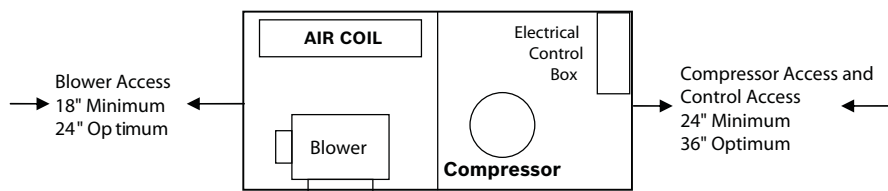

NOTE: The local electric codes may require 36" or more clearance at the electrical control box.

Greensource Si Series Model CE Residential Geothermal Heat Pump



BOSCH

Antifreeze Correction							
Antifreeze Type	Antifreeze %	Cooling			Heating		WPD Correction Factor EWT 30 °F
		EWT 90 Deg.F			EWT 30 Deg. F		
		Total Cap.	Sens. Cap	Power	Htg. Cap	Power	
Water	0	1.000	1.000	1.000	1.000	1.000	1.000
Propylene Glycol	5	0.997	0.997	1.004	0.989	0.997	1.060
	10	0.994	0.994	1.006	0.986	0.995	1.125
	15	0.990	0.990	1.009	0.978	0.988	1.190
	25	0.983	0.983	1.016	0.960	0.979	1.300
Methanol	5	0.997	0.997	1.003	0.990	0.997	1.060
	10	0.996	0.996	1.005	0.979	0.993	1.100
	15	0.994	0.994	1.008	0.970	0.990	1.140
Ethanol	5	0.998	0.998	1.002	0.981	0.994	1.160
	10	0.996	0.996	1.004	0.960	0.988	1.230
	15	0.992	0.992	1.006	0.944	0.983	1.280
	25	0.986	0.986	1.009	0.917	0.974	1.400
Ethylene Glycol	5	0.997	0.997	1.003	0.993	0.998	1.060
	10	0.995	0.995	1.004	0.986	0.996	1.120
	15	0.992	0.992	1.005	0.980	0.993	1.190
	25	0.988	0.988	1.009	0.970	0.990	1.330
	30	0.985	0.985	1.012	0.965	0.987	1.400

Greensource Si Series Model CE Residential Geothermal Heat Pump



BOSCH



WARNING:

These electric heaters can only be installed in factory default blower configuration only.

Field Installed Accessory - Internally Mounted Electric Heat Kits

Part Number	Kilowatt Heater - 208/230V	Availability per Unit				
		CE025	CE035	CE041	CE061	CE071
7738003204	Electric Heat - 3.6/4.8 kW	•	•	•	•	•
7738003205	Electric Heat - 7.8/9.6 kW	•	•	•	•	•
7738003206	Electric Heat - 10.8/14.4 kW		•	•	•	•
7738003207	Electric Heat - 14.4/19.2 kW			•	•	•



It is recommended to use a seven (7) conductor cable for thermostat interface.

Field Installed Option - Pump/Valve Relay

Part Number	CE025		CE035		CE041		CE061		CE071	
	VT	HZ	VT	HZ	VT	HZ	VT	HZ	VT	HZ
8733951906	•	•	•	•	•	•	•	•	•	•

Field Installed Accessory - Swivel Connector Kit (two connectors shipped loose with each unit)

Order Number	Type and Size	CE025		CE035		CE041		CE061		CE071	
		VT	HZ	VT	HZ	VT	HZ	VT	HZ	VT	HZ
8733927179	Male 3/4" NPT MPT to 1" swivel FPT	•									
8733927180	Male 1" NPT MPT to 1" swivel FPT		•	•	•	•	•	•	•	•	•



Swivel fittings are used in typical residential installations where water pressure ratings are below 125 psi. For higher pressure ratings which are typical to commercial installations, swivel fittings MUST NOT be used.

Greensource Si Series Model CE Residential Geothermal Heat Pump



BOSCH

Field Install Accessory - SmartStart Assist Kit

Part Number	CE025		CE035		CE049		CE061		CE071	
	VT	HZ	VT	HZ	VT	HZ	VT	HZ	VT	HZ
8733920430	•	•	•	•	•	•	•	•	•	•

Field Install Accessory - Duct Mounted Electric Heaters 208/230V

Nominal BTUH	Order #				Nominal CFM	Duct Flange Connection in Inches	Nominal Dimension in Inches
	5 kW	10 kW	15 kW	20 kW			
18000	7738002745	N/A	N/A	N/A	600	13.75 x 13.75	14 x 14
24000	7738002746	7738002747	N/A	N/A	800	13.75 x 13.75	14 x 14
30000	7738002748	7738002749	N/A	N/A	1000	15.75 x 15.75	16 x 16
36000	7738002748	7738002749	N/A	N/A	1200	15.75 x 15.75	16 x 16
42000	7738002747	7738002751	7738002752	N/A	1400	17.75 x 17.75	18 x 18
48000	7738002747	7738002751	7738002752	N/A	1600	17.75 x 17.75	18 x 18
60000	7738002747	7738002751	7738002752	7738002753	2000	17.75 x 17.75	18 x 18
70000	7738002747	7738002751	7738002752	7738002753	2200	17.75 x 17.75	18 x 18



Duct mounted heaters are only available in single phase 208/230 V. Please refer to Manufacturer's Installation and Operation Manual for proper installation and guidelines. It is recommended to use a seven (7) conductor cables for thermostat interface. It is required for the duct mounted heater to have an independent power supply. In fiberglass duct systems, a metal sleeve MUST be used as an insert and support to the heater.

Greensource Si Series Model CE Residential Geothermal Heat Pump



Field Install Accessory - Stainless Steel Hose Kits						
Options	Option 1	Option 2	Option 3**	Option 4**,***	Option 5**, ***	Option 6**, ***
Hose Size (Length, Diameter)	Hoses Only with Swivel	Hose Kit Hoses with Ported Ball Valves, Swivel and One P/T*	Hose Kit with Automatic Flow Valve (AFV)*	Hose kit with AFV, Y-Strainer & Blow Down Valve*	Hose Kit with AFV and Electric Valve*	Hose Kit with AFV, Y-Strainer, BDV and Electric Valve*
	Part #	Part #	Part #	Part #	Part #	Part #
12 Inch						
1/2" L	T111H02121	T111H02122	T111H02123	T111H02124	T111H02125	T111H02126
24 Inch						
3/4" S	T111H03241	T111H03242	T111H03243	T111H03244	T111H03245	T111H03246
1" L	T111H04241	T111H04242	T111H04243	T111H04244	T111H04245	T111H04246
1" S	T111H04241	T111H04242	T111H04247	T111H04248	T111H04249	T111H04240
1 - 1/4" S	T111H05241	T111H05242	T111H05243	T111H05244	T111H05245	T111H05246
1 - 1/2" L	T111H06241	T111H06242	T111H06243	T111H06244	T111H06245	T111H06246
1 - 1/2" S	T111H06241	T111H06242	T111H06247	T111H06248	T111H06249	T111H06240
2" S	T111H08241	T111H08242	T111H08243	T111H08244	T111H08245	T111H08246
36 Inch						
3/4" S	T111H03361	T111H03362	T111H03363	T111H03364	T111H03365	T111H03366
1" L	T111H04361	T111H04362	T111H04363	T111H04364	T111H04365	T111H04366
1" S	T111H04361	T111H04362	T111H04367	T111H04368	T111H04369	T111H04360
1 - 1/4" S	T111H05361	T111H05362	T111H05363	T111H05364	T111H05365	T111H05366
1 - 1/2" L	T111H06361	T111H06362	T111H06363	T111H06364	T111H06365	T111H06366
1 - 1/2" S	T111H06361	T111H06362	T111H06367	T111H06368	T111H06369	T111H06360
2" S	T111H08361	T111H08362	T111H08363	T111H08364	T111H08365	T111H08366

* All Hose Kits include S/R ported ball valves with swivel and P/T port.

** 'L' and 'S' only apply to kit options 3 through 6

*** GMP's are required for hose kits in options 3-6

Hose Kit Flow Rates by Size

Please see Technical Service Bulletin: Heat Pump Hose Kits – Water Flow Rates.


This document is located at www.bosch-climate.us under Support Center > Downloads > Downloads for Bosch Products > Service Bulletins.

Greensource Si Series Model CE Residential Geothermal Heat Pump



BOSCH

Field Install Accessory - Bosch Connected Control Wi-Fi Thermostat

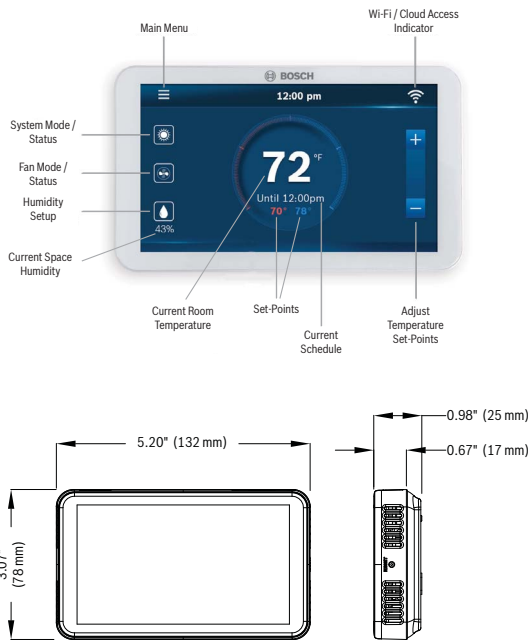

Description	Part Number	Heat	Cool	Humidity
Bosch Connected Control (BCC100)	8-733-948-009	4	2	Yes

Specifications

- 5 Inch Touch Screen 854 x 480 Pixels
- 7 Relay Outputs (Terminals) G, Y1, Y2, W1, W2, O/B, H/dH
- 1 Data Input (Pulse signals from Bosch WSHP)
- Displays Bosch Water Source Heat Pump Fault Messages
- Wi-Fi (802.11a/b/g/n) 2.4GHz (not compatible with 5GHz)
- FCC and IC Certification
- 5 Year Limited Warranty (see website for details: <https://www.bosch-climate.us/products-bosch-thermotechnology/thermostats-and-controls/residential-thermostats-controls/bcc100.html>)

Compatibility

- Conventional (Gas, Oil, Electric): Up to 2 Heat / 2 Cool
- Heat Pump (O/B to energize reversing valve in cool/heat): Up to 4 Heat / 2 Cool
- Supports up to 1 Accessory Unit: Humidifier or Dehumidifier (not provided by Bosch)
- Unit Modes: Heat, Cool, Auto, Off, Emergency Heat
- Fan Modes: Auto, On, Circulate
- Supports 2 Transformer Systems (Rh and Rc)
- C-Wire Required for Installation
- Supports Active and Passive Dehumidification without the need for external relays, such as Bosch Water Source Heat Pump products equipped with a Hot Gas Reheat Coil and/or ECM motor