
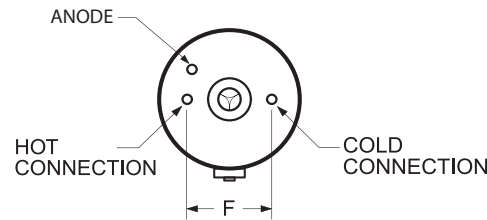


Energy Saver Residential Gas Models

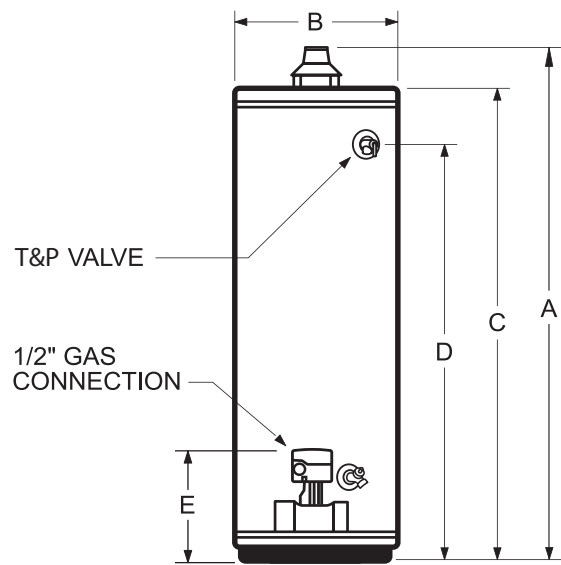

Nat. Gas LP Gas																
Model Number	Gal. Cap.	Btu/Hr Input	Btu/Hr Input	Energy Factor	1st Hr. Rating	GPH @ 90°F Rise	A	B	C	D	E	F	Gas Conn.	Water Conn.	Vent Size	Ship. Wt.
Energy Saver with Insulation Blanket - Short Models																
GSN030 35B	30	35,500	32,000	0.63	56	37	50"	18"	46-1/2"	40"	12"	8"	1/2"	3/4"	3" or 4"	110
GSN040 40B	40	40,000	36,000	0.62	67	41	51-1/2"	20"	48"	41-1/4"	12"	8"	1/2"	3/4"	3" or 4"	134
Energy Saver - Short Models																
GSN030 35	30	35,500	32,000	0.63	62	37	50"	20"	46-1/2"	40"	12"	8"	1/2"	3/4"	3" or 4"	118
GSN040 40	40	40,000	36,000	0.62	68	41	51-1/2"	22"	48"	41-1/4"	12"	8"	1/2"	3/4"	3" or 4"	135
GSN050 40	50	40,000	40,000	0.60	93	43	53-1/4"	24"	49-3/4"	41-1/2"	12"	8"	1/2"	3/4"	3" or 4"	177
Energy Saver with Insulation Blanket - Tall Models																
GTN030 35B	30	35,500	32,000	0.63	64	37	61-1/2"	16"	58"	51-3/4"	12-1/4"	8"	1/2"	3/4"	3" or 4"	123
GTN040 40B	40	40,000	36,000	0.62	70	42	61-3/4"	18"	58-1/4"	52"	12-1/4"	8"	1/2"	3/4"	3" or 4"	130
GTN050 60B*	50	60,000	54,000	0.60	98	65	65-1/2"	22"	61"	54-1/4"	13-1/2"	8"	1/2"	3/4"	4"	190
Energy Saver - Tall Models																
GTN030 35	30	35,500	32,000	0.63	67	37	61-1/2"	18"	58"	51-3/4"	12-1/4"	8"	1/2"	3/4"	3" or 4"	132
GTN040 35	40	35,500	N/A	0.62	67	38	61-3/4"	20"	58-1/4"	52"	12-1/4"	8"	1/2"	3/4"	3" or 4"	138
GTN040 40*	40	40,000	36,000	0.62	70	42	61-3/4"	20"	58-1/4"	52"	12-1/4"	8"	1/2"	3/4"	3" or 4"	138
GTN050 40*	50	40,000	37,000	0.60	88	41	60-3/4"	21"	57-1/4"	50-1/2"	12-1/4"	8"	1/2"	3/4"	3" or 4"	148
GTN050 50*	50	50,000	45,000	0.60	92	54	60-3/4"	22"	57-1/4"	50-1/2"	12-1/4"	8"	1/2"	3/4"	4"	165
GTN055 60*	55	60,000	54,000	0.59	103	65	59-3/4"	24"	55-1/4"	48"	13-1/2"	8"	1/2"	3/4"	4"	185

Notes: In the model number, "N" indicates Natural gas; replace "N" with "L" to indicate L.P. gas models

* Optional Side Tappings are available on these models. Add "ST" to the end of the model number (Ex: GTN04040ST).

Standard Features

- NAECA III Code Compliance
- Flammable Vapor Ignition Resistant
- Electronic Gas Control
- Low NOx Burner
- Glass-Lined Steel Tank
- Non-CFC Foam Insulation
- Tank Saver Anode
- Heat Trap
- Temperature & Pressure Relief Valve
- Brass Drain Valve
- 6- Year Limited Tank & Parts Warranty*
 - See warranty sheet for details.
- 10-Year Extended Warranty Available
 - Available for residential applications only.

*1-year limited tank & parts warranty when installed in a commercial application.