

## FEATURES & SPECIFICATIONS

### **INTENDED USE**

Provides general illumination in residential and light commercial applications. Ideal for use in offices and all rooms in the house.

## **ATTRIBUTES**

Sleek linear design with accenting white faux marble center strip and brushed nickel finials at each end. Durable, milk white acrylic diffuser provides wide spread, uniform illumination. Finials provide easy access for cleaning and maintenance. Available in three sizes: 1'x2', 1'x4' or 1-1/2'x4'.

Utilizes linear T8 fluorescent lamps for energy efficiency, superior color rendering and long life (not included).

Standard with 120 volt, 60Hz electronic ballast ensures no flickering and quiet operation without interfering with other electronics. Also available in other ballast configurations.

For use with non-dimmable switches only.

CUL listed (standard) suitable for damp locations and ENERGY STAR® qualified. For non-RE ballast fixtures, UL (standard) and for CSA certified (see options).


Guaranteed for two years against mechanical defects in manufacture.



**Indoor Decorative** 

# Velegant **Linear Flush Mount**

Linear T8 Fluorescent

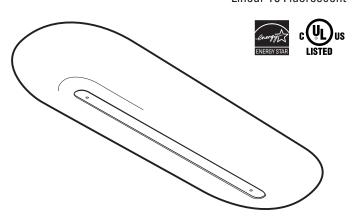

## **DIMENSIONS**

Nominal Size	Lamp Configuration	Model Number	Number of Lamps	(A) Width inches (cm)	(B) Length inches (cm)	(C) Extension* inches (cm)
1' x 2'		11692	(2) 17W linear T8	12" (30.5)	31-3/4" (80.6)	3-3/8" (8.6)
1' x 4'		11690	(2) 32W linear T8	12" (30.5)	55-3/4" (141.6)	3-3/8" (8.6)
1-1/2' x 4'		11694	(4) 32W linear T8	15-1/4" (38.7)	57-1/2" (146.0)	3-7/8" (9.8)

<sup>(</sup>A) (B) (C)

## ORDERING INFORMATION

Choose the boldface catalog nomenclature that best suits your needs and write it on the appropriate line. Order accessories as separate catalog numbers.

Model Number<sup>1,2</sup> 1'x2' - (2) 17W linear T8 11692 fluorescent lamps 11690 1'x4' - (2) 32W linear T8 fluorescent lamps 11694 1-1/2'x4' - (4) 32W linear T8 fluorescent lamps

Residential Ballast<sup>3</sup>

(blank)

120 volt residential electronic ballast (standard) Other voltage and ballast types available (see ballast/voltage)

Ballast/Voltage<sup>5</sup> (blank) RE ballast fixtures only MVOLT Multi-volt 120 120 volt 277 277 volt

347 volt

**Options** GEB Electronic ballast, <20%THD **GEB10IS** T8 electronic ballast, <10% THD, instant start GEB10RS T8 electronic ballast, 10% THD, rapid start

Consult factory for other options and accessories

CSA certified

Lamp<sup>4</sup> (blank) RE ballast fixtures only

Non-RE ballast fixtures only

17 17W T8 (2' fixtures only) 32W T8

(4' fixtures only)

Accessories/Replacement parts

D2VEL 1' x 2' white acrylic diffuser DVEL x 4' white acrylic diffuser D15VEL 1-1/2' x 4' white acrylic diffuser

CSA

Lamps not included.

Lamps not included.

Use with non-dimmable switches only.

Residential electronic ballast standard and requires RE
designation. No designation for lamp type is required on **RE** ballast fixtures.

No designation for ballast/voltage type is required on RE ballast

Example: 11690RE

<sup>\*</sup> Extension from ceiling

All dimensions are in inches (centimeters)

## Velegant Linear Flush Mount

## **PHOTOMETRICS**

Full photometric data report available within 2 weeks from request. Consult factory.

