

# Location:



# SYMMONS® Origins



## 9600-PLR, 9600-PLR-TRM, 9600PLR, 9600PLRTRM Shower Valve Trim Specification Submittal

### Feature Highlights

- Origins Shower Valve System or Trim
- Requires Temptrol® Pressure Balancing Shower Valve (included with 9600-PLR)
- Adjustable stop screw to limit handle turn (included with 9600-PLR)
- Metal lever handle
- Diverter tub spout not included
- Showerhead not included
- Components shall be metal and nonmetallic construction, plated in standard Polished Chrome finish
- Available with TA-10 flow control spindle and T-12A cap assembly for Temptrol valve bodies installed with Test Cap (order p/n 9600PLRTRMTC)

### Model Numbers

- 9600-PLR**  
Shower Valve Trim with Temptrol Pressure Balancing Shower Valve (modifiers include decimal points and hyphens)
- 9600PLR**  
Shower Valve Trim with Temptrol Pressure Balancing Shower Valve (use when ordering L1-L7 modifications, do not use hyphens or decimal points)
- 9600-PLR-TRM**  
Shower Valve Trim, Temptrol Pressure Balancing Shower Valve ordered separately (modifiers include decimal points and hyphens)
- 9600PLRTRM**  
Shower Trim (use when ordering L1-L7 and TC modifications, do not use hyphens or decimal points)

#### Note:

- To create trim sku, follow the format:  
Base SKU -> PLR -> Finish -> Modifier (L1-L7) -> Flow Rate (if lower than standard) -> TRM -> TC (if applicable)
- To create valve & trim sku, follow the format:  
Base SKU -> X or CHKS -> PLR -> Finish -> Modifier (L1-L7) -> Flow Rate (if lower than standard)
- For B and REV modifications, contact customer service for your sku

### Options/Modifications

- REB** Rebuild trim kit, includes TA-10 and TA-4
- VP** Vandal resistant escutcheon screws in place of standard screws
- L7** Less handle
- TC** Test Cap Trim
- CHKS** Integral Check Stops
- OP** 13" Oval plate
- B** Brass escutcheon (chrome only)
- STN** Satin Nickel Finish
- X** Integral service stops - allows water shut-off at valve for service

### Compliance

- ASME A112.18.1/CSA B125.1



### Warranty

**Limited Lifetime** - to the original end purchaser in consumer/residential installations.

**10 Years** - for commercial/industrial installations. Refer to [www.symmons.com/warranty](http://www.symmons.com/warranty) for complete warranty information.




## Architectural/ Engineering Specification

Symmons Museo \_\_\_\_\_ With Origins Tub/Hand Shower System or Trim, Requires Temptrol® Pressure Balancing Tub/Shower Valve (included with S-9605-PLR). Origins Shower Valve System or Trim, requires Temptrol® Pressure Balancing Shower Valve (included with 9600-PLR), adjustable stop screw to limit handle turn (included with 9600-PLR), metal lever handle, diverter tub spout not included, showerhead not included, components shall be metal and nonmetallic construction, plated in standard Polished Chrome finish, available with TA-10 flow control spindle and T-12A cap assembly for Temptrol valve bodies installed with Test Cap (order p/n 9600PLRTRMTC). 10 Year Commercial Warranty. ASME A112.18.1/CSA B125.1 complaint. Available options include: "REB - Rebuild trim kit", "VP - Vandal resistant screw", "L7 - Less handle", "STN - Satin Nickel finish", "X - Integral service stops - allows water shut-off at valve for service", "B - Brass escutcheon (chrome only)", "CHKS - Integral check stops", "OP - 13 inch Oval Plate", and "TC - Test Cap Trim".



9600-PLR, 9600-PLR-TRM, 9600PLR, 9600PLRTRM

## Dimensions

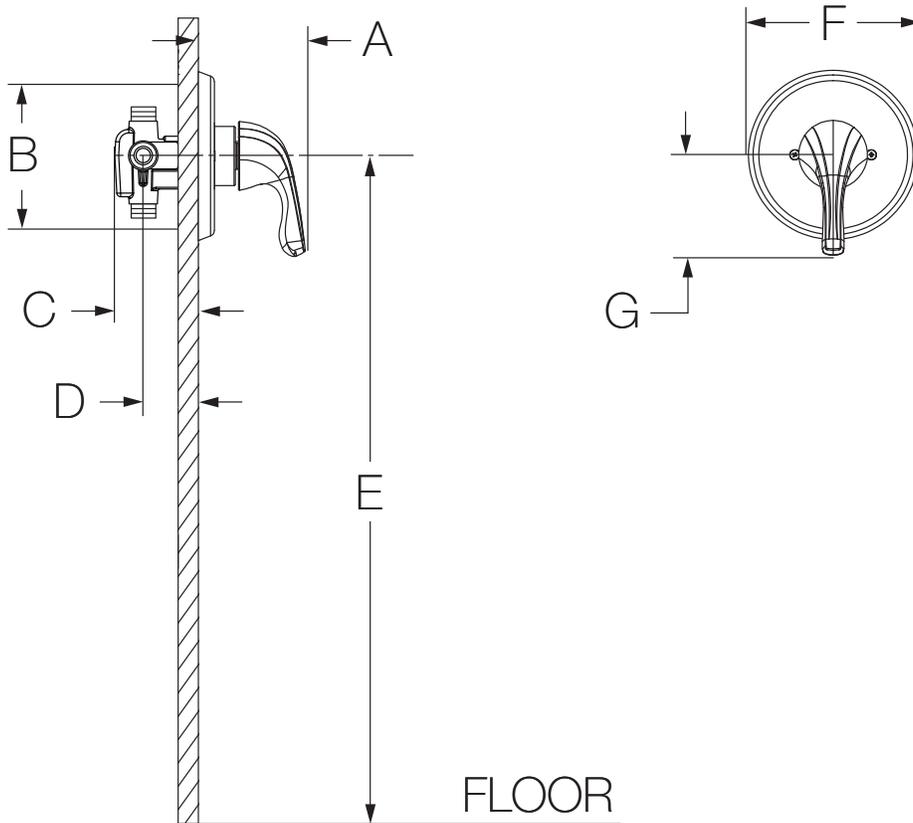

Measurements	
A	3-5/8", 92 mm
B	Shower Valve Hole Size Min. Ø 3", 76 mm Max. Ø 4", 102 mm
C	3-1/2", 89 mm
D	Rough-in 2-3/8" ± 1/2", 60 mm ± 13 mm
E	Ref. 42", 1067 mm
F	Ø 5-3/4", 146 mm
G	3-3/8", 86 mm