

TAG:


Electronic Sensor Faucet

## Architect/Engineering Specifications:

Single hole deck mount electronic sensor faucet with polished chrome plated brass body with integral spout, 0.5 GPM vandal resistant nonaerated spray device, AC/DC control module with internal flow control setting switches, temperature control mixing valve with check valves and 18" flexible stainless steel supply hoses with 3/8" compression connections. Certified to ASME A112.18.1/CSA B125.1, NSF 61-Section 9, NSF 372, UL 1951 and ASSE 1070. Meets ADA ANSI/ICC A117.1 requirements.

4 7/8"

Job Name		
Model Specified		
Variations Specified		
Date		
2 1///"		

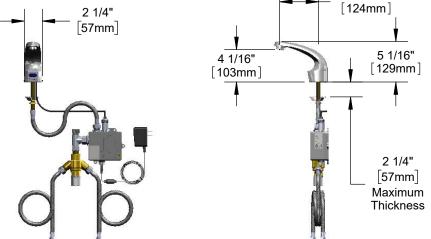



#### Features & Benefits:

- Single hole deck mount faucet w/ polished chrome plated brass body w/ integral spout
- 0.5 GPM vandal resistant non-aerated spray device, Series 8 (B-0199-08-N05)
- Water resistant control module w/ internal flow control switches for adjusting auto time out & shut off delay settings
- Optional auto flush feature flows water for 30 seconds after every 12 inactive hours
- Plug in AC transformer or (4) AA battery (DC) power options
- Thermostatic mixing valve w/ check valves
- 18" flexible stainless steel supply hoses w/ 3/8" compression connections
- Low battery LED indicator light
- Material: Polished chrome plated brass body & tubular spout

# **Optional Outlets (Series 3 / VR Series 8)**

#### **Product Compliance:**

- ASME A112.18.1 / CSA B125.1
- NSF 61 Section 9
- NSF 372 (Low Lead Content)
- ANSI A117.1 (ADA)
- UL 1951
- ASSE 1070 (TMV)

#### Warranty: Three Year (Limited)

## Performance Data:

- Pressure: 20 125 psi
- Temperature: 40 °F 140 °F
- Flow Rate: 0.5 GPM @ 60 psi
- Water Consumption: @ 10 sec = .08 gal
  @ 15 sec = .13 gal

GPM	Aerated	Non-Aerated (Laminar)	VR Aerated	VR Non-Aerated (VR Laminar)	Optional Deck Plates
0.35	N/A	□ B-0199-03-N035	N/A	□ B-0199-08-N035	□ 4" Chrome Plated Brass Deck Plate
0.5	N/A	□ B-0199-03-N05	N/A	Standard	B 8" Chrome Plated Brass Deck Plate
1.0	N/A	N/A	N/A	□ B-0199-08-LF10	
1.5	□ B-0199-03-WS	N/A	□ B-0199-08-WS	□ B-0199-08-LF15	
2.2	□ B-0199-03	□ B-0199-26	□ B-0199-08	□ B-0199-28	











