
# Architect/Engineering Specifications:

Single hole wall mount electronic sensor faucet with polished chrome plated brass body and 4 1/8" rigid gooseneck, 0.5 GPM vandal resistant non-aerated spray device, AC/DC control module with internal flow control setting switches, temperature control mixing valve with check valves and 18" flexible stainless steel supply hoses with 3/8" compression connections. Certified to ASME A112.18.1/CSA B125.1, NSF 61-Section 9, NSF 372 and UL 1951. Meets ADA ANSI/ICC A117.1 requirements.





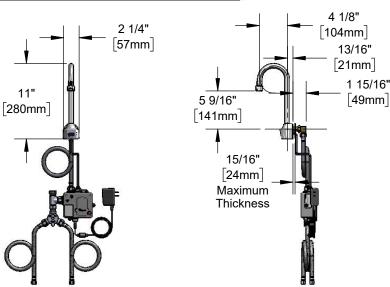

## Features & Benefits:

- · Single hole wall mount, polished chrome plated brass body
- 4 1/8" rigid gooseneck
- 0.5 GPM vandal resistant non-aerated spray device, Series 6 (B-0199-06-N05)
- Water resistant control module w/ internal flow control switches for adjusting auto time out & shut off delay settings
- Optional auto flush feature flows water for 30 seconds after every 12 inactive hours
- Plug in AC transformer or (4) AA battery (DC) power options
- · Mechanical temperature mixing valve w/ check valves
- 18" flexible stainless steel supply hoses w/ 3/8" compression inlet connections
- · Low battery LED indicator light
- Material: Polished chrome plated brass body and tubular spout

### **Product Compliance:**

- ASME A112.18.1 / CSA B125.1
- NSF 61 Section 9
- · NSF 372 (Low Lead Content)
- ANSI A117.1 (ADA)
- UL 1951

Warranty: Three Year (Limited)



#### **Performance Data:**

• Pressure: 20 - 125 psi

Temperature: 40 °F - 140 °F
Flow Rate: 0.5 GPM @ 60 psi

Water Consumption: @10 sec=.08 gal

@15 sec=.12 gal



### Optional Outlets (Series 1 / VR Series 6)

GPM	Aerated	Non-Aerated (Laminar)	VR Aerated	VR Non-Aerated (VR Laminar)
0.35	N/A	□ B-0199-01-N035	N/A	□ B-0199-06-N035
0.5	N/A	□ B-0199-01-N05	N/A	Standard
1.0	□ B-0199-01-F10	N/A	□ B-0199-06-F10	N/A
1.5	□ B-0199-01-WS	□ B-0199-29	□ B-0199-06-WS	□ B-0199-29VR
2.2	□ B-0199-01	□ B-0199-21	□ B-0199-06	□ B-0199-06-VRF







T&S BRASS AND BRONZE WORKS, INC.



