Installation Instructions

Undermount Stainless Steel Sinks

Installation

Caution: Please read all instructions before beginning the installation.

1. BEFORE YOU BEGIN

- PROFLO recommends that undermount sinks should be installed by a professional, experienced installer.
- Warning: the electronic template (download DXF file from www.proflo.com) will create an overhang of approximately 1/8'' or a reveal of 1/2". It is recommended that you discuss this with your customer and agree that this finished appearance is the desired effect. PROFLO is not responsible for improper sink or countertop installations. Due to the aesthetic qualities of the converging bowl radii, the dxf template provides the only opening recommended for installation of PROFLO undermount sinks, see illustration below.
- PROFLO undermount sinks should only be fastened to a solid surface countertop (i.e. granite).
- PROFLO is not responsible for sink or countertop if damaged during installations.
- Metal edges may be sharp - use caution when handling.
- Follow all local plumbing and building codes.
- Inspect sink for damage prior to beginning installation.

2. RECOMMENDED TOOLS AND MATERIALS

- Sealant Drill and 1/2" (or Larger) Drill Bit
- Saber Saw or Keyhole Saw
- Safety Glasses
- Electronic Template (www.proflo.com)
- Mounting Brackets (PFUCCLIP)
- Pencil
- Tape Measure
- Putty Knife
- Scissors
- Gloves

3. INSTALLING YOUR NEW SINK

1. Make cutout using electronic DXF file.
2. Locate and drill the mounting holes (following the countertop manufacturer's insructions) as shown below. Holes should allow even spacing of mounting brackets around the sink. Type of fasteners to be as recommended by countertop supplier.
3. Fasten mounting brackets to countertop loosely.
4. Using a good quality silicone caulk, apply a bead evenly all around the top of the sink flanges.
5. Position and align sink over the countertop opening. Press silicone onto countertop.

NOTE: DXF TEMPLATE IS ONLY A GUIDE. ACTUAL SINK SHOULD BE PRESENT TO ENSURE PERFECT CUT OUT.

6. Tighten fasteners until mounting brackets are snug against sink.
7. Check alignment of sink to countertop opening.
8. Tighten down fasteners evenly. Be careful not to overtighten. Remove excess silicone.

1/8" COUNTERTOP OVERHANG

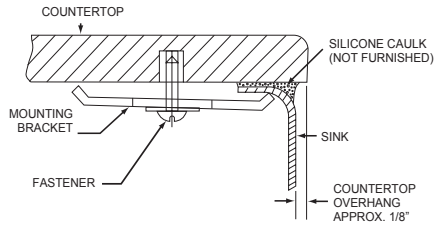

1/2" COUNTERTOP REVEAL

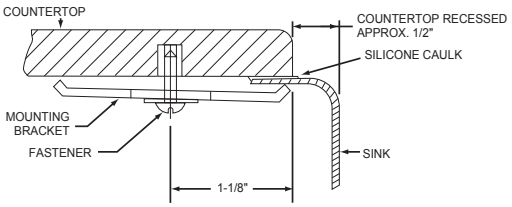

Limited Warranty

WARRANTY: Subject to the limitations expressed herein, Seller warrants that products manufactured by Seller shall be free from defects in design, material and workmanship under normal use for a periodof two (2) years from installation but in no case shall the warranty period extend longer than thirty (30) months from the date of sale ("Warranty Period"). This warranty is void for any damage caused by misuse, abuse, neglect, acts of Nature, or improper installation. For the purpose of this section, "Normal Use" means in strict accordance with the installation, operation and maintenance manual. The warranty for products not manufactured by Seller is provided by the original equipment manufacturer.

REMEDIES: Seller shall repair or replace, at its option, any nonconforming or otherwise defective product, upon receipt of notice from Buyer during the Warranty Period at no additional charge.
SELLER HEREBY DISCLAIMS ALL OTHER EXPRESSED OR IMPLIED WARRANTIES, INCLUDING, WITHOUT LIMITATION, ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS OR FITNESS FOR A PARTICULAR PURPOSE.

© 2013 Ferguson Enterprises, Inc.

Distributed Exclusively by Ferguson and Wolseley Canada