


T-1810-LF Lead-Free* DZR Brass Fixed Orifice Circuit Balancing Valve - ½" to 2"



NSF/ANSI 61
NSF/ANSI 372

DIMENSIONS - In.						
Size	Cv - Full Open	Cvs	H	A	T - Thread	Weight Lbs.
½" - U	0.605	0.64	4.06	3.46	½" - 14 NPT	1.228
½" - L	0.985	1.33	4.06	3.46	½" - 14 NPT	1.228
½"	2.22	3.24	4.06	3.46	½" - 14 NPT	1.228
¾"	4.24	6.16	4.06	3.78	¾" - 14 NPT	1.426
1"	7.21	11.24	4.06	3.94	1" - 11.5 NPT	1.731
1¼"	14.50	23.41	4.85	4.63	1¼" - 11.5 NPT	2.780
1½"	22.65	34.95	4.94	5.00	1½" - 11.5 NPT	3.501
2"	34.36	63.67	5.34	5.72	2" - 11.5 NPT	4.802

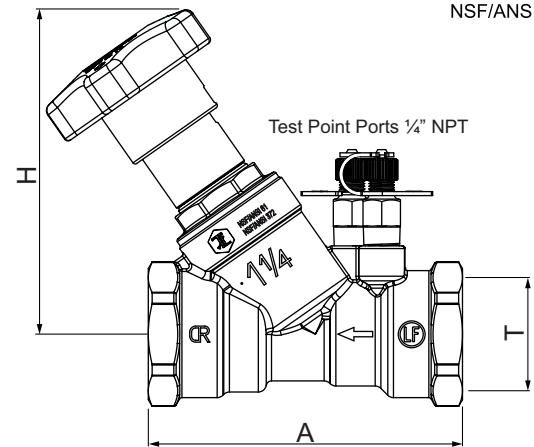

MATERIAL LIST	
PART	SPECIFICATION
Body	Brass - UNS C27453 (DZR)
Venturi Insert	Brass - UNS C27453 (DZR)
Balancing Cone	Brass - UNS C27453 (DZR)
Gasket Disk	PTFE
Disk	Brass - UNS C27453 (DZR)
O-ring	EPDM
Disk stem	Brass - UNS C27453 (DZR)
Union	Brass - UNS C27453 (DZR)
Stem	Brass ASTM B124 C37700
Bonnet	Brass - UNS C27453 (DZR)
Indicator Housing	ABS Black Color
Scale	Acetal Resin
Handwheel	ABS Black Color
Test Point (2)	Brass UNS C35330 (DZR)

**300 PSI Non-Shock Cold Working Pressure to 160°F
Maximum Temperature 260°F @ 150 PSI**

Flow Measurement Accuracy ±3%

Accessories



PT Test Point Extension

RECOMMENDED FLOW RANGE		
Size - In.	Flow Range - gpm	
	Min	Max
½" - U	0.24	1.0
½" - L	0.52	2.0
½"	1.2	5.0
¾"	2.4	10
1"	4.3	18
1¼"	9.0	33
1½"	12	49
2"	24	78

*Weighted average lead content ≤0.25%

Project: _____

Contractor: _____

PO/Job No.: _____

Engineer: _____

Representative: _____

Date: _____