





UPC Code : 078477487136

Country Of Origin : China



Available Colors :

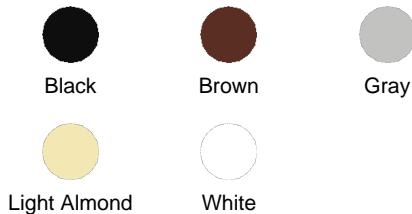

GFTR1-I

15 Amp, 125 Volt Receptacle/Outlet, 20 Amp Feed-Through, Tamper-Resistant, Self-test SmartlockPro GFCI, Monochromatic, back and side wired, nylon wallplate/faceplate, screws and self-grounding clip included - Ivory

Peace of mind, all the time. The SmartlockPro Self-Test GFCI tests itself even if you forget. Designed to meet the latest UL standard for auto-monitoring (self-test) our complete line of self-test GFCIs periodically conduct an automatic internal test to confirm that it can respond to a ground fault. With the slimmest profile on the market, the device allows for fast and easy installation, while Leviton's patented reset lockout mechanism prevents reset of the GFCI if it is not wired or operating correctly. The SmartlockPro Self-Test GFCI is the smart choice in ground fault circuit interrupter protection.

Technical Information

Product Features

Amperage : 15 A

At Rated Voltage : 1 HP

Brand : SmartlockPro

Color : Ivory

Feature : Self-Test

Fed Spec WC-596 : Yes

Grade : Residential/Commercial Specification Grade

Grounding : Self Grounding

NEMA : 5-15R

Pole : 2

Standards and Certifications : UL/CSA

Strap Material : Galvanized Steel

Tamper Resistant : Yes

Termination : Back & Side

Trip Level : Class A, 5mA plus or minus 1mA

Type : Standard Duplex

Voltage : 125 VAC

Wallplate : Included

Warranty : 2-Year Limited

Wire : 3

AC Horsepower Ratings

At Rated Voltage : 1 HP

Dielectric Voltage : Withstands 1250VAC per UL 943 and CSA-C22.2 No. 144.1-06

Short Circuit Current Rating : 10KA

Temperature Rise : Max 30C after 100 cycles OL at 150 percent rated current

Electrical Specifications

Dielectric Voltage : Withstands 1250VAC per UL 943 and CSA-C22.2 No. 144.1-06

Flammability : Rated V-2 per UL 94

Operating Temperature : -35C to +66C

Short Circuit Current Rating : 10KA

Temperature Rise : Max 30C after 100 cycles OL at 150 percent rated current

Environmental Specifications

Face Material : Thermoplastic

Grounding Screw : Plated Steel

Line Contacts : Brass Double Wipe .031 Thick

Notes : w/ Wallplate

Product ID : Ratings are permanently marked on device

Terminal Accom. : 14-10 AWG

Terminal ID : Brass-Hot, Green-Ground, Silver-Neutral

Terminal Screws : Plated Steel

Yoke : Zinc-Plated Steel

Mechanical Specifications

Amperage : 15 A

Body Material : Polycarbonate

Brand : SmartlockPro

Color : Ivory

Face Material : Thermoplastic

Feature : Self-Test

Fed Spec WC-596 : Yes

Grade : Residential/Commercial Specification Grade

Grounding : Self Grounding

NEMA : 5-15R

Pole : 2

Product ID : Ratings are permanently marked on device

Standards and Certifications : UL/CSA

Strap Material : Galvanized Steel

Tamper Resistant : Yes

Terminal Accom. : 14-10 AWG

Terminal ID : Brass-Hot, Green-Ground, Silver-Neutral

Termination : Back & Side

Trip Level : Class A, 5mA plus or minus 1mA

Type : Standard Duplex

Voltage : 125 VAC

Warranty : 2-Year Limited

Wire : 3

Standards and Certifications

SPECIFICATION SUBMITTAL

JOB NAME: <input type="text"/>	CATALOG NUMBERS: <input type="text"/>	
JOB NUMBER: <input type="text"/>	<input type="text"/>	<input type="text"/>

Leviton Manufacturing Co., Inc.

201 North Service Road, Melville, NY 11747

Telephone: +1-800-323-8920 · FAX: +1-800-832-9538 · Tech Line (8:30AM-7:30PM E.S.T. Monday-Friday):

+1-800-824-3005

Leviton Manufacturing of Canada, Ltd.

165 Hymus Boulevard, Pointe Claire, Quebec H9R 1E9 · Telephone: +1-800-469-7890 ·

FAX: +1-800-824-3005 · www.leviton.com/canada

Leviton S. de R.L. de C.V.

Lago Tana 43, Mexico DF, Mexico CP 11290 · Tel.: (+52)55-5082-1040 · FAX: (+52)5386-

1797 · www.leviton.com.mx

Visit our Website at: www.leviton.com

© 2018 Leviton Manufacturing Co., Inc. All Rights Reserved. Subject to change without notice.

Leviton has a global presence.

If you would like to know where your local Leviton office is located please go to:

www.leviton.com/international/contacts/

