



SUBMITTAL INFORMATION

Uni-Flange® Mechanical Joint Restraint - (UFR1500R-CA-x-U style)



4" - 6" SERIES UFR1500R RAPID INSTALL MECHANICAL JOINT RESTRAINT FOR C900 OR C909 PVC OR HDPE

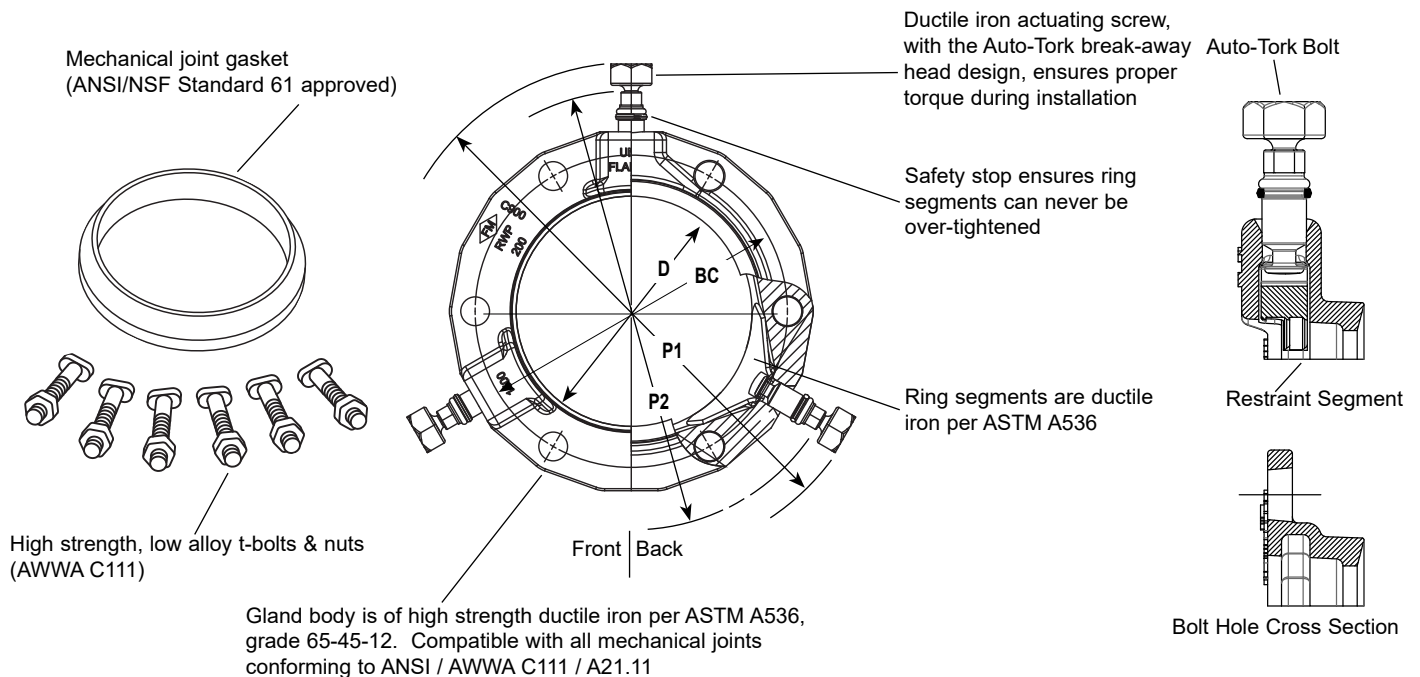

NOM. PIPE SIZE	O.D.	CATALOG NUMBER	NO. OF RESTRAINT SEGMENTS	APPROX. WEIGHT (LBS.)	P1*	P2**	BC	D	PRESSURE RATING				✓ SUBMITTED ITEM(S)
									C900			C909	
									DR-14	DR-18	DR-25	PC235	
4"	4.80"	UFR1500R-CA-4-U	2	12.5	13.00"	10.25"	7.50"	4.90"	305 PSI	235 PSI	165 PSI	235 PSI	
6"	6.90"	UFR1500R-CA-6-U	3	18.0	15.13"	12.17"	9.50"	7.00"	305 PSI	235 PSI	165 PSI	235 PSI	

*Maximum O.D. of gland on pipe before Auto-Tork heads are removed (as shipped)
 **Maximum O.D. of gland on pipe after Auto-Tork heads are removed
 Note: Ford recommends the use of a properly sized insert stiffener when using UFR1500 on HDPE

FEATURES

- Fits C900 or C909 PVC and HDPE
- Auto-Tork actuating screws with heads specially designed to twist off at the correct installation torque, leaving a hex head in case future system maintenance or removal is required
- Restraining segments are mechanically retained in pockets
- Series 1500 eliminates the need to pour expensive and time consuming concrete thrust blocks
- UL listed and FM approved for use on listed and approved C900 PVC pipe
- Gland, screws and segments are black epoxy coated using the e-coat process
- Gland colored red for identification purposes

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current.



The Ford Meter Box Company, Inc.
 P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
 Phone: 260-563-3171 / Fax: 800-826-3487
 Overseas Fax: 260-563-0167
 www.fordmeterbox.com



10/10/18

Submitted By: