


Location:

 **SYMMONS® Temptrol®**
Tub-Shower Valve C-86-2
Specification Submittal

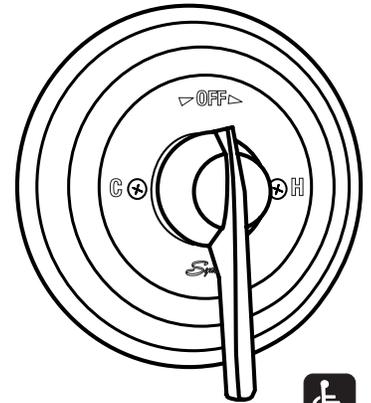

Feature Highlights

- Symmons commercial series tub-shower valve
- Symmons Temptrol® pressure balancing mixing valve with adjustable stop screw to limit handle turn.
- Polished chrome finish (standard)

Model Numbers

- C-86-2..... Tub-Shower valve with Symmons Temptrol® pressure balancing mixing valve
- C-86-2-TRM.. Tub-Shower Trim only, valve must be ordered separately

Handle Options / Modifications

Append appropriate -suffix to model number.

- LAM Metal finish insert handle



Options / Modifications

Append appropriate -suffix to model number.

- IPS 1/2 inch female IPS connections on Symmons Temptrol® mixing valve
- X Symmons Temptrol® pressure balancing mixing valve includes integral service stops to allow water shut-off for service,
- VP Vandal resistant escutcheon screws
- REV Reverse coring, hot on right, cold on left (used in back to back installations)
- X-CHKS Integral check stops


Standards / Certifications

ASME A112.18.1-2005/CSA B125.1-05

Warranty

- Limited Lifetime - to the original end purchaser in consumer installations.
- 5 years - for commercial installations

Dimensions *Commercial Temptrol Tub-Shower System, C-86-2*

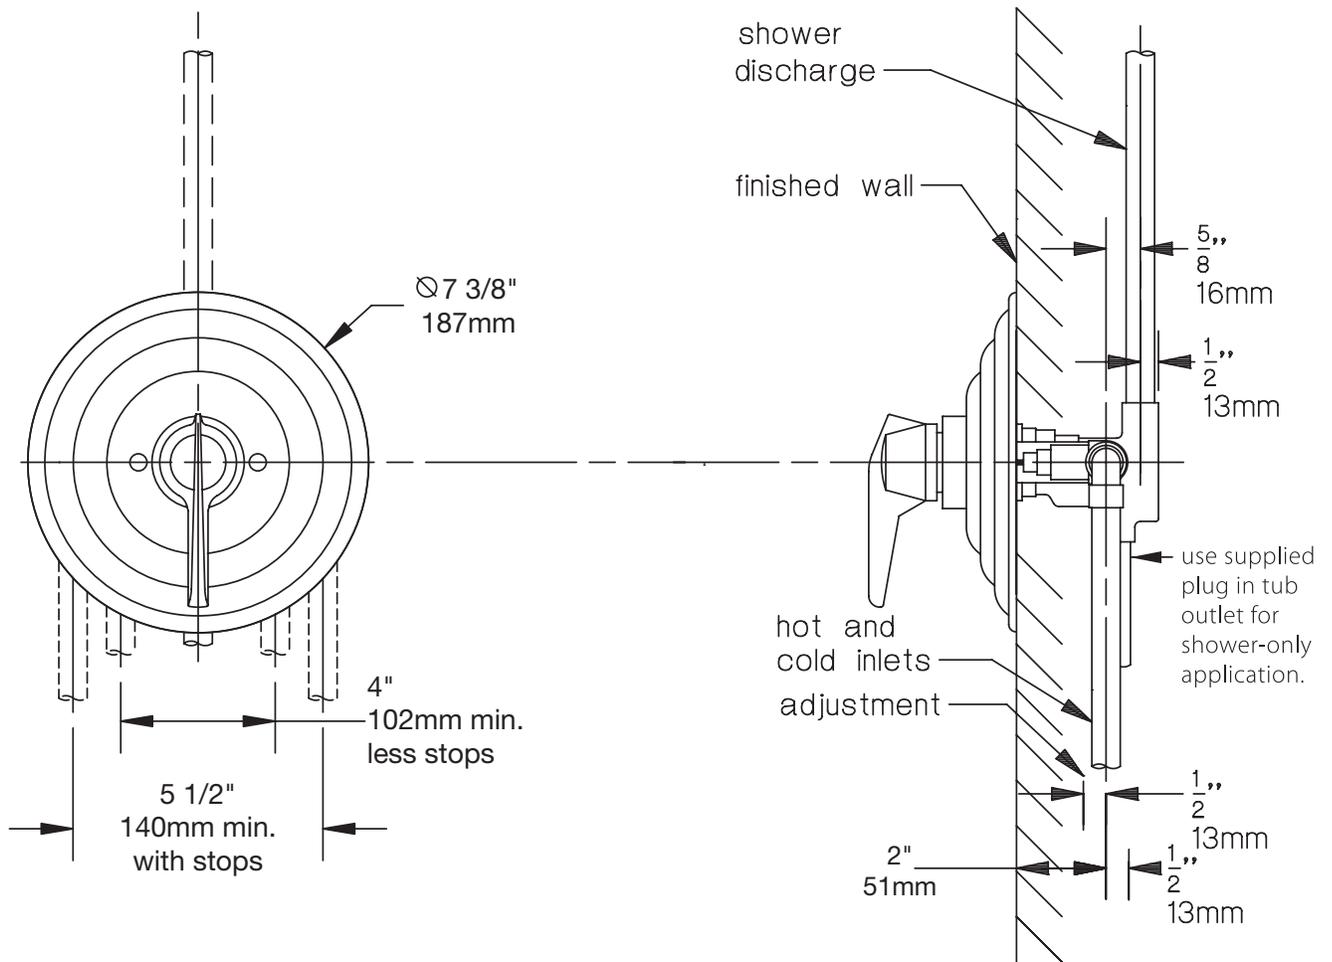

Symmons Industries, Inc. ■ 31 Brooks Drive ■ Braintree, MA 02184
 (800) 796-6667, (781) 848-2250 ■ Fax (800) 961-9621, (781) 664-1300
 Website: www.symmons.com ■ Email: customerservice@symmons.com

©2012 Symmons Industries, Inc. Printed in U.S.A. ■ 091712

SYMMONS[®]
 the smart choice™