

ASSEMBLY INSTRUCTION**1AICL or Q**


WIDESPREAD LAVATORY SET

**1AICL****1AICQ****REMOVAL OF FAUCET:**


Always turn the water supply off before removing the existing faucet or disassembling a valve. Open both faucet handles to relieve water pressure and to ensure that the water has been successfully turned off.

CARE OF FAUCET:

The use of warm water and a soft cloth is all that is required to clean Rubinet products. The patina of our living finishes (Oil Rubbed Bronze & Tuscan Brass) will change as a result of normal use. Applying Mineral Oil on occasion will create a softer look, subtle color changes and character.

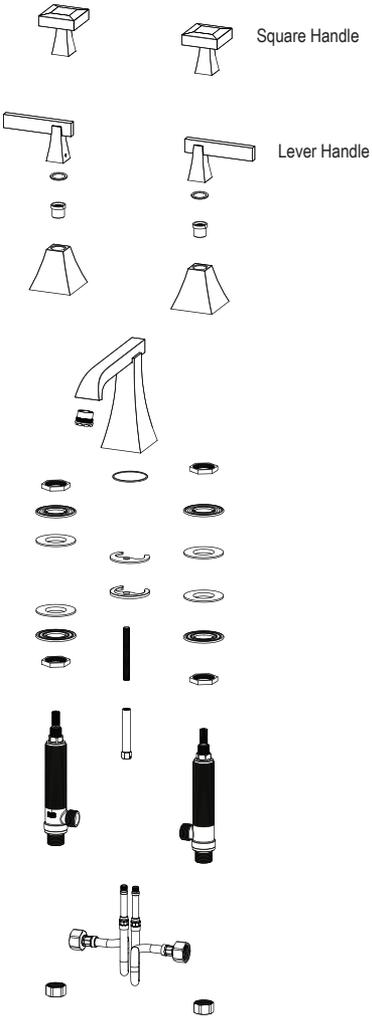

1

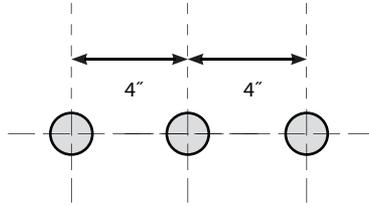

HOLE SIZE
Ø 1 3/8"

Brass Nut

Fiber

Rubber

Rubber


Fiber

Brass Nut



Left (Hot)

Jig


Right (Cold)




* Adjust valve height using the JIG as shown

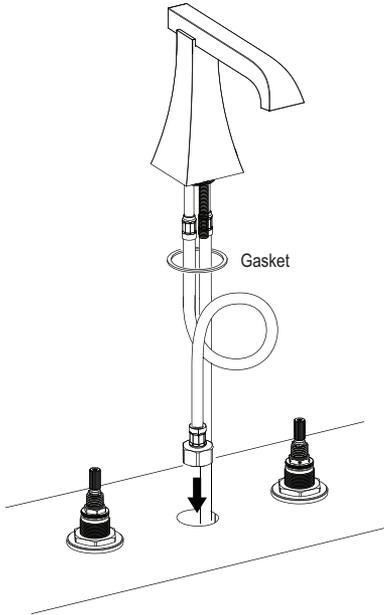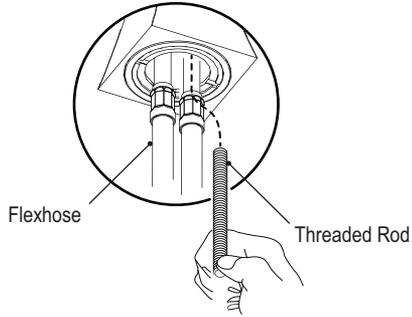


3


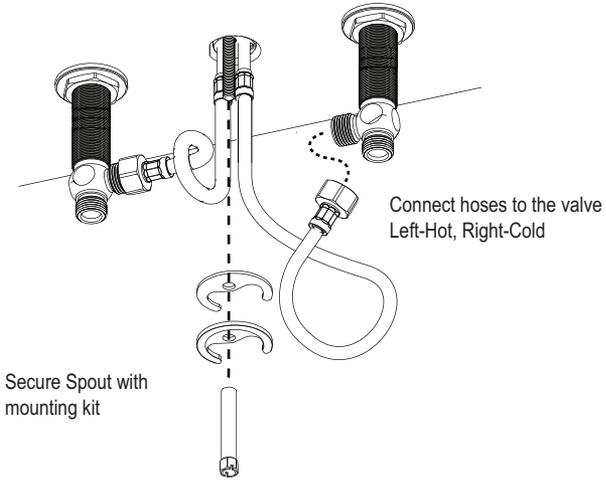


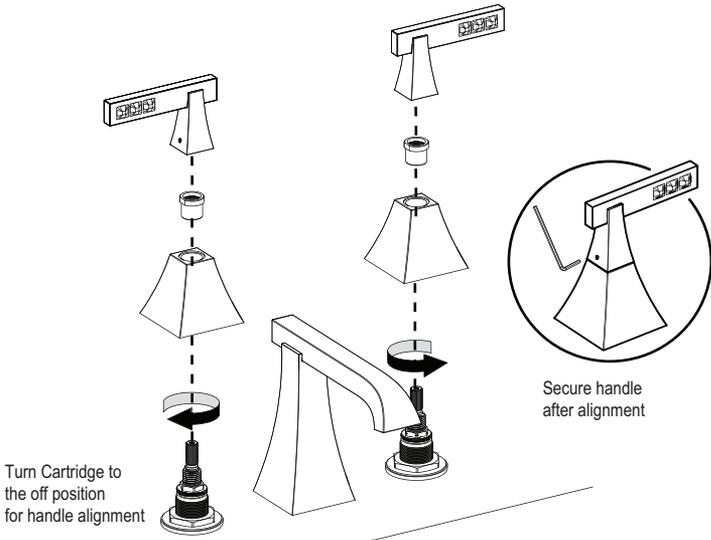

Tighten valve nut and connect water supplies



AERATOR REMOVAL



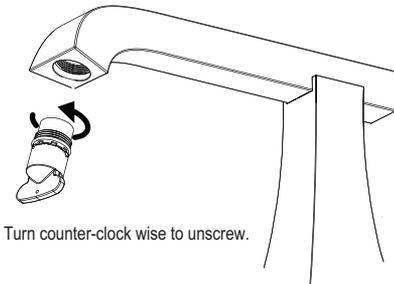
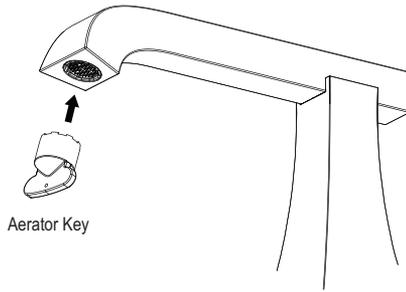


FEATURES:

- Brass construction with choice of 21 finishes
- Two lever or square handles with choice of black (JT) or Clear (CL) crystal accents
- Quarter turn Ceramic Disk cartridges
- 1.5 gpm @ 60 psi (Helps meet CalGreen regulation)

APPROVAL:

- AB1953 / NSF61
- ASME A 112.18.1
- CSA B125.1

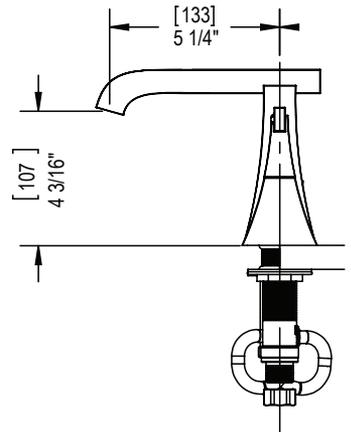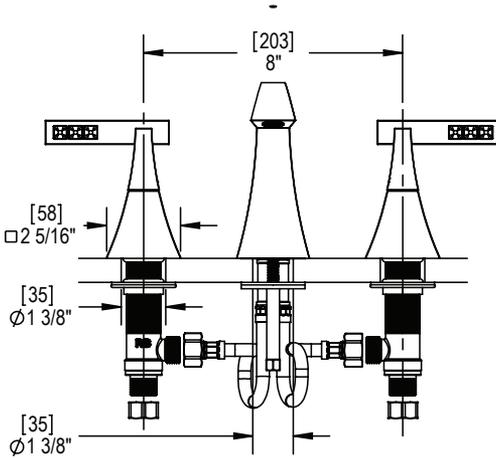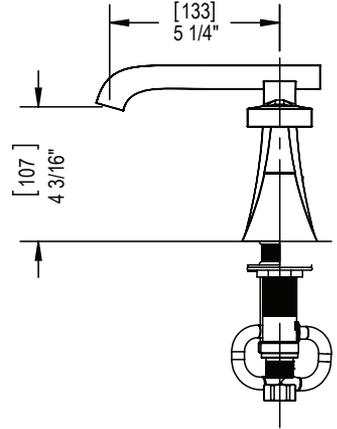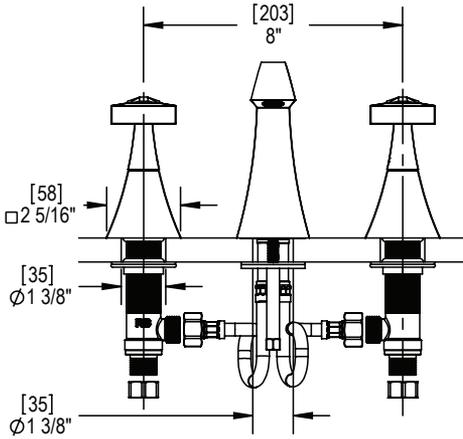

CONTACT US:

If you need assistance with installation, replacement parts or have any questions regarding your Rubinet product, please call a Customer Service representative at: 905-851-6781 toll free 1-800-461-5901 or visit www.rubinet.com