DURASTAR®

FORCE

BOILERS




SPECIFICATION SHEET

GAS-FIRED CAST IRON STEAM BOILERS

Standard Features

- Offered exclusively by Ferguson
- Natural gas (LP conversion kit available)
- Electronic ignition
- Built-in draft diverter – fits in low spaces
- Cast iron heat exchanger, meets ASME boiler code and pressure vessel code
- Metal section connectors resist chemicals, increase the life of the boiler
- Fully assembled
- Fully packaged
- Insulated jacket
- Pressure limit
- 15 PSI safety valve
- Honeywell® gas valve
- Hydrolevel® probe-type LWCO
- Steam pressure gauge
- Built-in draft diverter
- Flame rollout switch
- Blocked vent switch
- Vent damper
- Drain valve
- 10-year limited warranty on heat exchanger, one-year limited warranty on parts

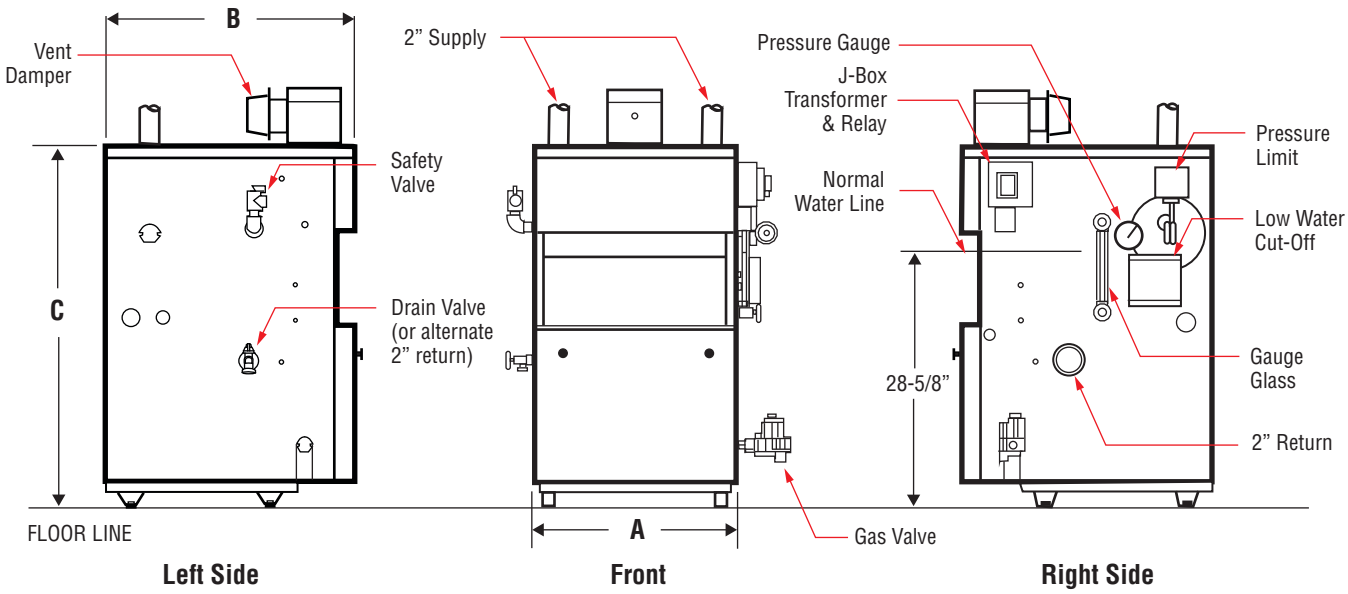

Model	Dimensions (in.)				AFUE %	Input Rate (MBH)	DOE Heating Capacity (MBH)	Net AHRI Steam (MBH)	Steam (sq. ft.)	Approx. Shipping Weight (lbs.)	ALT 1
	A	B	C	Flue Collar Dia.							
FORCESTM03	12-3/4	28	40-7/16	4	82.0	69	56	42	175	350	FORCESTEAM03NH
FORCESTM04	16	28	40-7/16	5	82.0	103	84	63	263	420	FORCESTEAM04NH
FORCESTM05	19-1/4	28	40-7/16	6	82.0	138	113	85	354	485	FORCESTEAM05NH
FORCESTM06	22-1/2	28	40-7/16	6	82.1	172	142	107	446	555	FORCESTEAM06NH
FORCESTM07	25-3/4	30	40-7/16	7	82.1	207	171	128	533	620	FORCESTEAM07NH
FORCESTM08	29	30	40-7/16	7	82.2	241	199	149	621	690	FORCESTEAM08NH

The net AHRI ratings shown are based on a piping and pickup allowance of 1.333.

The manufacturer should be consulted before selecting a boiler for installations having unusual piping and pickup requirements, such as intermittent system operation, extensive piping systems, etc.

Ratings are shown for installations at sea level and elevations up to 2,000 feet.

©2026 Ferguson Enterprises, LLC 0826 9646111