

 PROSELECT.

FORCE™




Gas-Fired Cast Iron Steam Boiler

Standard Features

- Natural gas
(LP conversion kit available)
- Electronic ignition
- Built-in draft diverter – fits in low spaces
- Cast iron heat exchanger, meets ASME boiler code and pressure vessel code
- Metal section connectors resist chemicals, increase the life of the boiler
- Fully assembled
- 10-year limited warranty

FERGUSON.COM/PROSELECT

Technical Information

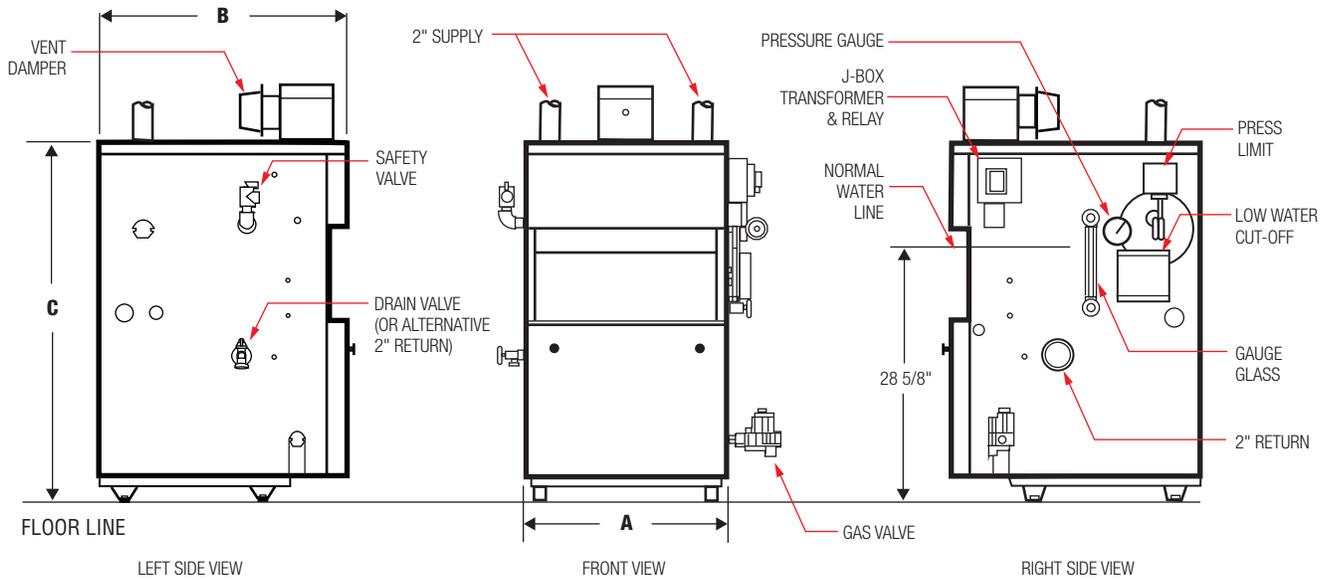

Model	Dimensions (inches)				AFUE%	Input Rate (MBH)	DOE Heating Capacity (MBH)	Net AHRI Steam (MBH)	Steam (Sq. Ft.)	Approx. Shipping Weight (lbs.)	Alt 1
	"A"	"B"	"C"	Flue Collar Diameter							
FORCEM03	12-3/4	28"	40-7/16	4	82.0	69	56	42	175	350	FORCETEAM03NH
FORCEM04	16	28"	40-7/16	5	82.0	103	84	63	263	420	FORCETEAM04NH
FORCEM05	19-1/4	28"	40-7/16	6	82.0	138	113	85	354	485	FORCETEAM05NH
FORCEM06	22-1/2	28"	40-7/16	6	82.1	172	142	107	446	555	FORCETEAM06NH
FORCEM07	25-3/4	30"	40-7/16	7	82.1	207	171	128	533	620	FORCETEAM07NH
FORCEM08	29	30"	40-7/16	7	82.2	241	199	149	621	690	FORCETEAM08NH

The Net AHRI Steam Ratings shown are based on a piping and pickup allowance of 1.333. The manufacturer should be consulted before selecting a boiler for installations having unusual piping and pickup requirements, such as intermittent system operation, extensive piping systems, etc.

Ratings shown are for installations at sea level and elevations up to 2,000 feet.

Additional Standard Features

- Fully packaged
- Insulated jacket
- Pressure limit
- 15 psi safety valve
- Honeywell gas valve
- Hydrolevel probe-type LWCO
- Steam pressure gauge
- Built-in draft diverter
- Flame rollout switch
- Blocked vent switch
- Vent damper
- Drain valve

