



# Sunward®

## 5.5' Whirlpool Bath

### K-6347



#### Features

- Integral lumbar support and armrests for comfort.
- End drain.
- Textured bottom surface.
- 20" (508 mm) x 66" (1676 mm) x 42" (1067 mm)

#### Material

- Acrylic

#### Hydrotherapy

- Single-speed whirlpool offers 6 fully adjustable hydro-massage jets for water flow and direction.

#### Installation

- Drop-in or under-mount.

#### Required Accessories

K- 11677 Bath Drain

#### Recommended Accessories

K- 1491 Bath/Whirlpool Pillow  
K- 9696 Whirlpool 6-Jet Trim Kit  
K- 1601 Bath/Whirlpool Footstop  
K- 24916 Wireless Music Kit



#### Codes/Standards




ASME A112.19.7/CSA B45.10  
CSA B45.5/IAPMO Z124  
UL 1795  
Greenguard UL 2818 - Gold  
CARB P2


#### KOHLER® One-Year Limited Warranty

See website for detailed warranty information.

#### Available Color/Finishes


*Color tiles intended for reference only.*

Color	Code	Description
	0	White
	96	Biscuit
	47	Almond

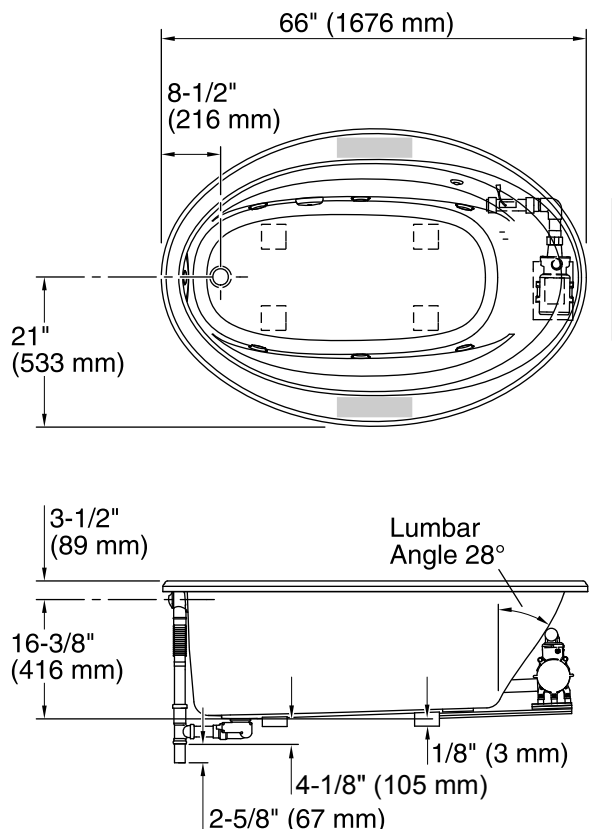


No change in measurements if connected with drain illustrated. (K-37382)

Recommended faucet area



**Drop-In Rim Detail**

Access Panel  
20" (508 mm) W x  
15" (381 mm) H

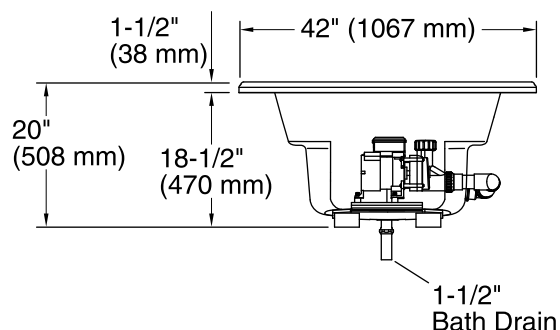

## Required Electrical Service

One dedicated circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI) or Residual Current Device (RCD).

Pump: 120 V, 15 A, 60 Hz

## Technical Information

All product dimensions are nominal.

Installation: Drop-in, Under-mount  
Drain location: End  
Basin area, bottom: 48-5/8" x 24-1/2" (1235 mm x 622 mm)  
Basin area, top: 60" x 32-3/16" (1523 mm x 818 mm)  
Minimum floor load: 34 lbs/ft² (166 kg/m²)  
Water depth: 14-5/16" (364 mm)  
Water capacity: 70 gal (265 L)  
Template: Drop-in, 1233384-7, not required, included  
Under-mount, 123, not required, not included  
Electrical component rating: Pump: 120 V, 7.5 A, 60 Hz  
Pump speed: Single

## Notes

Measure your actual product for rough-in details.

Install this product according to the installation instructions.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.