



Underscore® Oval

5.5' VibrAcoustic® BubbleMassage™ Bath

K-5716-GVBCW



Features

- Center drain.
- Slotted overflow allows for deep soaking.
- Chromatherapy lighting allows you to select a preferred color scheme to suit your mood.
- Bask® heated surface creates spa-like relaxation with soothing warmth on your back and neck.
- Dual lumbar supports two-person bathing by offering comfort at both ends.
- Syncs with devices enabled with BLUETOOTH® wireless technology including smart phones, MP3 players, tablets and laptops located up to 33 feet away.*

Material

- Acrylic.

Hydrotherapy

- 118-122 BubbleMassage™ airjets.
- Variable-speed blower for adjusting hydromassage intensity.
- VibrAcoustic® technology emits sound waves and offers a surround sound experience.
- Six concealed speakers send sound waves through the water to gently massage the body.
- Fully adjustable volume above and below the water.
- Zones of Control™ feature allows you to target massage to back, midsection, or feet.

Installation

- Undermount or drop in.

Required Accessories

K-7271 Brass Slotted Overflow Bath Drain

or

K-7272 PVC Slotted Overflow Bath Drain

Recommended Accessories

K-883 Under-mount Install Kit



Codes/Standards










ASME A112.19.7/CSA B45.10
CSA B45.5/IAPMO Z124
ASTM E162
ASTM E662
UL 1795
Greenguard UL 2818 - Gold
CARB P2

See website for detailed warranty information.

*The BLUETOOTH® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Kohler Co. is under license. Other trademarks and trade names are those of their respective owners.

Available Color/Finishes

Color tiles intended for reference only.

| Color | Code | Description |
|--|------|---------------|
|  | 0 | White |
|  | 96 | Biscuit |
|  | 47 | Almond |
|  | NY | Dune |
|  | 95 | Ice™ Grey |
|  | G9 | Sandbar |
|  | K4 | Cashmere |
|  | 58 | Thunder™ Grey |
|  | 7 | Black Black™ |



USA/Canada: 1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.


For the most current Specification Sheet, go to www.kohler.com.

1-13-2018 03:29

THE BOLD LOOK
OF **KOHLER**®

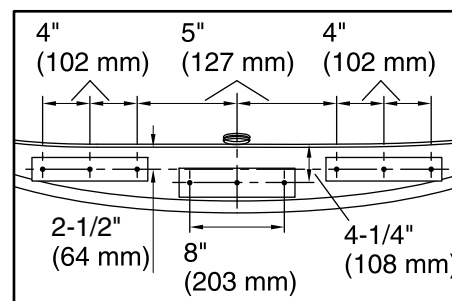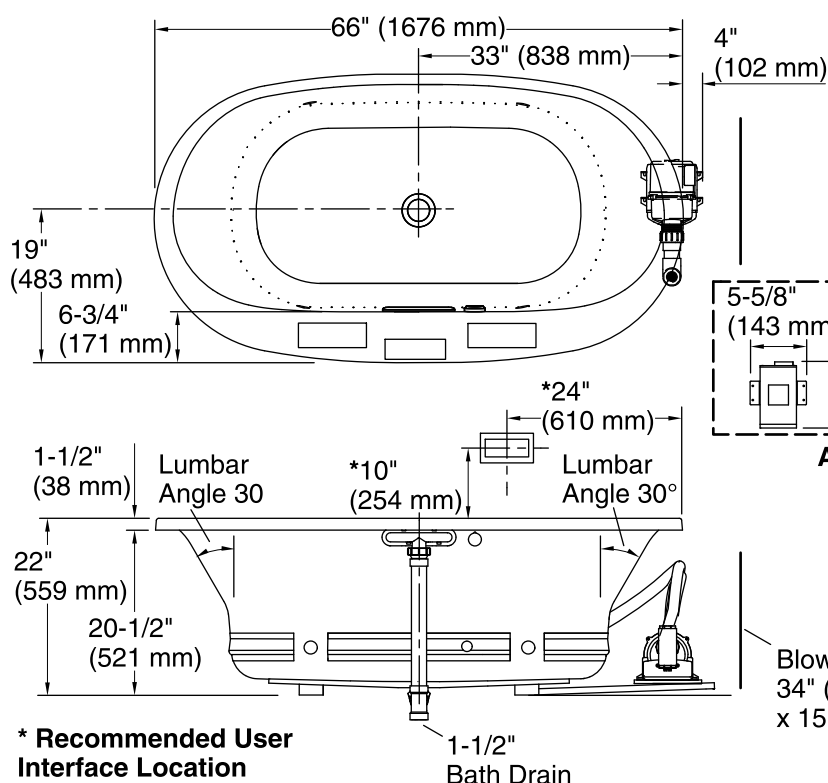☐ Recommended Faucet Location


Recommended Faucet Hole Location

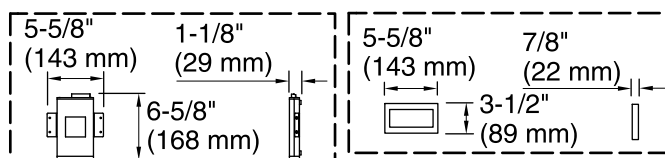

Amplifier

=====

User Interface

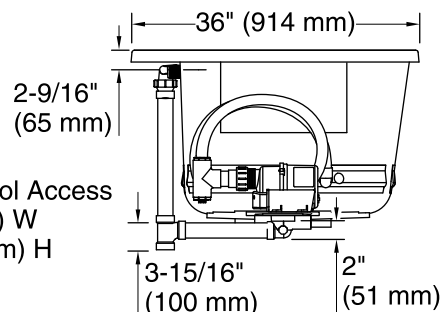

Required Electrical Service

One dedicated circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI) or Residual Current Device (RCD).

Blower, Amplifier, 120 V, 15 A, 60 Hz
Heated Surface:

Technical Information

All product dimensions are nominal.

| | |
|------------------------------|---|
| Installation: | Drop-in, Under-mount |
| Drain location: | Center |
| Basin area, bottom: | 47" x 26-1/4" (1193 mm x 666 mm) |
| Basin area, top: | 61-3/16" x 28-3/8" (1554 mm x 721 mm) |
| Weight: | 125 lbs (56.7 kg) |
| Minimum floor load: | 53.9 lbs/ft ² (263.2 kg/m ²) |
| Water depth: | 17-9/16" (446 mm) |
| Water capacity: | 85.5 gal (323.7 L) |
| Template: | Drop-in, 1268439-7, required, included |
| Electrical component rating: | Blower: 120 V, 10 A, 60 Hz, 300 W Amplifier: 120 V, 1.1 A, 50/60 Hz Heated Surface: 120 V, 0.5 A, 60 Hz, 65 W |

Notes

Measure your actual product for rough-in details.

Install this product according to the installation instructions.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

Provide one grounded electrical outlet within 24" (610 mm) of each component.

Do not relocate or alter the PVC tee or coiled flexible tubing connected to the blower. Follow the blower relocation instructions exactly.

Control amplifier fits 16" (406 mm) center studs.
25' (7.6 m) cables are included.

If installing a rim-mount faucet, make sure there is no interference above or below the deck before drilling any holes.