

CONSTRUCTION EQUIPMENT

STORAGE OPTIONS

AIR MOVERS/DRYERS

GENERATORS

COMMUNICATION EQUIPMENT

MEASUREMENT/SURVEY EQUIPMENT

JOBSITE CLEAN-UP/COVER-UP

HYDRAULIC CYLINDERS

PNEUMATIC EQUIPMENT

NAILERS/STAPLERS

ALL-WEATHER PENS/PAPER

CONCRETE /MASONRY TOOLS

TILE EQUIPMENT

SAWHORSES

DRYWALL TOOLS

CARPET TOOLS

WELDING TOOLS/PROTECTION

FOAM KITS

WATER PUMPS

POWER WASHERS



**ALASKA INDUSTRIAL
HARDWARE**
A BSNC
COMPANY



**GENERAL HARDWARE
DISTRIBUTORS**
A BSNC
COMPANY

CONSTRUCTION EQUIPMENT



Storage Chests StorageMaster®



Designed for security on jobsite. Body constructed of 16 ga. steel with fully arc welded seams. Cover tang 7 ga. steel. Caster-ready 12 ga. skids on bottom. Pre-punched holes allow addition of accessory doors. Baked-on tan enamel finish. Recessed, ergonomic handles. Features Watchman® IV recessed lock housing. Depth 30".

KNA69: Can be used as a work table with cover closed.

KNA89: Additional reinforcement between the lock and the side housing, with improved ball stud bracket for added strength, reducing the potential for breakage and improving durability.

KNA91: Built-in 48" wide, 12 ga. steel ramp in front for loading large items. Reinforced steel channels support heavy loads. Deadbolt latches on each end of ramp.

Mfg. No.	Order No.	No. Shelves	Dim. In. H x W x D	Cap. Cu. Ft.
69	KNA69	1	37 x 60 x 30	35.3
89	KNA89	2	49 x 60 x 30	47.8
91	KNA91	2	49 x 72 x 30	57.5

Storage Chests ThermoSteel



Heated storage saves money, reduces downtime, and prevents ruined material due to cold temperatures. Heated storage keeps everything at the optimal temperature, just plug in the heating element when jobsite temperature is less than 40°F.

Mfg. No.	Order No.	Dim. In. H x W x L.
89-H	KNA89-H	49 x 30 x 60



Storage Chests JobMaster®



Body constructed of 16 ga. steel with fully arc welded seams. Overlapping cover tang 7 ga. steel. Caster-ready 12 ga. skids on bottom. Baked-on tan enamel finish. Recessed, ergonomic handles. Features Watchman® IV recessed lock housing.

Mfg. No.	Order No.	Dim. In. H x W x D	Cap. Cu. Ft.
36	KNA36	16 x 36 x 19	7
60	KNA60	23 x 60 x 24	20-1/4
4824	KNA4824	23 x 48 x 24	16
4830	KNA4830	29 x 48 x 30	25-1/4
2472	KNA2472	23 x 72 x 24	24-1/2

Storage Chests JobMaster®



Jobsite chest with independent locking Junk Trunk quick access drawer. Anti-slam lid supported with gas strut. 3-sided entry easy grip lid designed for easy access. Raised chest floor to easily reach chest bottom without over-reaching.

Mfg. No.	Order No.	Dim. In. H x W x D	Cap. Cu. Ft.
4830-D	KNA4830D	35 x 48 x 30	17

Welders' Toolboxes



Designed for welders' gloves, tools, goggles and rods. Spot-welded 16 ga. steel construction with baked-on enamel finish. Shipping weight 38 lbs.

Mfg. No.	Order No.	Dim. In. H x W x D	Cap. Cu. Ft.
30	KNA30	12 x 30 x 16	3.3



Storage Chests JobMaster®



Features Watchman IV® lock system. Full-length shelves for storage of long items. Doors on front side only. Accessory pegboard and door shelves optional. Shipping weight 394 lbs.

Mfg. No.	Order No.	Dim. In. H x W x D	Cap. Cu. Ft.
109	KNA109	60 x 60 x 24	47.5

Portable Field Stations



Review job materials or store tools on-site. Large, angled desktop with full width storage shelf above. Stationary lower cabinet, full width shelf. Gas spring swing-up door, with locking arms. Baked-on enamel finish.

Mfg No.	Order No.	Dim. In. HxWxD	Cap. Cu. Ft.
119-01	KNA119-01	79 x 60 x 42	115.2

Crane Lift Kits



Makes lifting safer and easier. Installs into prepunched holes. Fits most Knaack models. Kit includes 4-life brackets and attachment hardware. CE and OSHA certified.


Mfg. No.	Order No.	Lift Cap. Lbs.
497	KNA497	2,500



CONSTRUCTION EQUIPMENT



Tool Chests 3-Piece Set

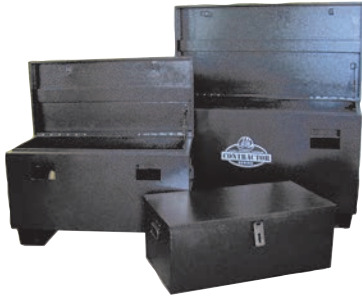

Large capacity tool chest with 0.64" thick steel body. Staked, welded steel hinges and special bolt cutter-proof locking system. Heavy duty, water resistant construction holds up to 3300 lbs. 24 cu. ft. storage space. Inner tray for smaller tools, foam rubber lid seal, and two handles.

Mfg. No.	Order No.	Dim. In. LxWxH
JB3PC	GLQJB3PC	48 x 24 x 21-1/2 36 x 17 x 22 30 x 17 x 22



Caster Sets & Tool Trays



Include two rigid and two swivel casters with mounting tools. Brake units (where applicable) located on swivel casters.

Caster Sets

Mfg. No.	Order No.	Dia. In.	Fit Models	Load Rating Lbs.*
600	KNA600	6	All	3280

Lock Systems WATCHMAN® IV



Lock tab with bolt kit for KNAACK® chests with deadbolt systems.

Mfg. No.	Order No.	Desc.
7286-1PK	KNA72861PK	Locking system



Truck Racks T-Rac® G2



No rust aluminum construction with dual stage powder coating resists wear. Features wind deflectors to reduce noise. Easily removable with single axis clamps. Aluminum HD load stops/tie downs adjust across full width of truck. All aluminum cleat tie downs. Includes: Front and rear aluminum racks, eight single axis clamps with integrated toolbox mounts, two toolbox mount shims, four sliding aluminum HD load stop/tie downs with quick release clamping knobs and four aluminum side cleats.

Mfg. No.	Order No.	Load Cap. Lbs.
37003	TRK37003	800

Truck Racks TracONE™



No rust aluminum construction with dual stage powder coating to resist wear and match the finish quality of the truck. Easily removable due to using single axis clamps. Adjustable composite loop tie downs. Includes front and rear aluminum racks, eight single axis clamps and four adjustable crossbar loop tie downs.

Mfg. No.	Order No.	Load Cap. Lbs.
27000-01	TRK2700001	800



Truck Racks Universal



Over-the-cab design, sturdy, high-strength, 1-5/8" round steel tubing, corrosion resistant zinc coating. For ladders, PVC piping, lumber, and more. Adjusts to fit most pickup trucks, and the included clamps offer a no-drill installation.

Mfg. No.	Order No.	Load Cap. Lbs.
91000	TRK91000	1000



Truck Racks Aluminum



Truck rack designed to fit almost any size pickup truck bed. Carries ladders, extension cords, and landscape equipment.

Mfg. No.	Order No.	Load Cap. Lbs.
7063500	RSE70635	800



Cargo Carriers



Foldable, heavy duty cargo carrier. Fits 2" receivers. 500 lb. capacity.

Mfg. No.	Order No.	Dim. In. W x L
07495	ERK07495	20 x 60

CONSTRUCTION EQUIPMENT

weather guard.

Storage Equipment Weather Guard®



MORE INFO AVAILABLE! CALL US!

Underbed Boxes Weather Guard® — Black



Steel underbed boxes are designed to withstand rugged daily use. Tools remain accessible when needed and safe and secure from weather and theft. A great solution for secure storage of additional tools and equipment on heavy duty trucks. Mounts above or below truck bed to provide additional easy-access storage.

Mfg. No.	Order No.	Dim. In. H x W x L	Cap. Cu. Ft.
524-5-01	WGD524-5	18-1/8 x 18-1/4 x 24-1/8	4.5
548-5-01	WGD548-5	18-1/8 x 18-1/4 x 48-1/8	9

Saddle Truck Boxes Weather Guard® — Aluminum



EXTREME PROTECTION® lock. Features clear coat, powder coat finish. Level storage secures 48" level. Reduced clearance cover, body channel for extra strength, and crimp-free/drill-free install mounting brackets.

Mfg. No.	Order No.	Dim. In. H x W x L	Cap. Cu. Ft.
127-0-02	WGD127002	18-1/2 x 20-1/4 x 71-1/2	11.3
117-0-02	WGD117002	18-1/2 x 27-1/2 x 71-1/2	15.3

weather guard.

Saddle Truck Boxes Weather Guard® — Aluminum



Full size extra wide saddle box features EXTREME PROTECTION® lock and black ARMOR-TUF™ powder coat finish. Level storage secures 48" level. 90° cover opening for easy opening, body channel for extra strength, and crimp-free/drill-free install mounting brackets.

Mfg. No.	Order No.	Dim. In. H x W x L	Cap. Cu. Ft.
117-5-02	WGD117BLK	18-1/2 x 27-1/2 x 71-1/2	15.3

Truck Boxes Low Profile



Low profile box featuring Extreme Protection™ locking system and full weather seal. Includes 12V access for electrical up-fits and drill-free install mounting brackets.

Mfg. No.	Order No.	Dim. In. L x W x H	Cap. Cu. Ft.
174-0-01	WGD174001	56-1/2 x 16-1/4 x 13-1/4	4.1

Hi-Side Truck Boxes Weather Guard® — Aluminum



Aluminum diamond plated with clear ARMOR TUF™ powder coat. Drill resistant lock core and three-point latching system. Rain gutter and full-weather seal keeps moisture out of the box and your equipment. Top-mounted removable parts bin keeps items organized.

Mfg. No.	Order No.	Dim. In. L x W x H	Cap. Cu. Ft.
390-0-02	WGD390002	90-1/4 x 13-1/4 x 16	11.1

weather guard.

Saddle Truck Boxes Defender Series™ — Full Size



Includes a tamper-resistant push-button lock, steel reinforced, looped strikers, D-shaped ribbed weather stripping and heavy-duty four-piece welded aluminum box construction. Seven year warranty.

Mfg No.	Order No.	Dim. In. L x D x W	Cu. Ft.
WGD105901	300105-9-01	71 X 19.7 X 17.7	10.7

Saddle Truck Boxes Defender Series™ — Lo-Profile



Includes a tamper-resistant push-button lock, steel reinforced, looped strikers, D-shaped ribbed weather stripping and heavy-duty four-piece welded aluminum box construction. It also comes with a seven year warranty.

Mfg No.	Order No.	Dim. In. L x D x W	Cap. Cu. Ft.
300106-9-01	WGD106901	71 X 19.7 X 16.2	7.9

Saddle Truck Boxes Defender Series™ — Full Size Black



Includes a tamper-resistant push-button lock, steel reinforced, looped strikers, D-shaped ribbed weather stripping, heavy-duty four-piece welded aluminum box construction and black powder coat finish. Seven year warranty.

Mfg No.	Order No.	Dim. In. L x D x W	Cu. Ft.
300105-53-01	WGD1055301	71 X 19.7 X 17.7	10.7

CONSTRUCTION EQUIPMENT

weather guard.


Truck Saddle Boxes RedArmour™ — Slim



Full-size slim saddle truck box includes a push-button lock, steel reinforced looped strikers, bulb weather stripping, four-piece welded aluminum body construction. Backed by a two year warranty.

Mfg. No.	Order No.	Dim. In. L x D x W	Cap. Cu. Ft.
200102-9-01	WGD102901	70-3/8 x 13-13/16 x 14	7.5

Truck Saddle Boxes RedArmour™ — Full Size



Full-size saddle truck box includes a push-button lock, steel reinforced looped strikers, bulb weather stripping, four-piece welded aluminum body construction. It is backed by a two year warranty.

Mfg. No.	Order No.	Dim. In. L x D x W	Cap. Cu. Ft.
200103-9-01	WGD103901	70-3/8 x 19-9/16 x 17-13/16	13

Truck Saddle Boxes RedArmour™ — Universal Chest




Chest truck box includes a push-button lock, steel reinforced looped strikers, bulb weather stripping, four-piece welded aluminum body construction. Backed by a two year warranty.

Mfg. No.	Order No.	Dim. In. L x D x W	Cap. Cu. Ft.
200400-9-01	WGD400901	40-3/4 x 19-7/16 x 19-3/16	8.4

weather guard.

Replacement Locks 2-Pack



Fits Saddle Boxes, Cross Boxes, Lo-Side and Super-Lo Side Boxes, and Pork Chop Boxes manufactured from 2005 to current.

Mfg. No.	Order No.	Desc.
7838-PK	WGD78382PK	Replacement Lock

Gas Springs

Knaack® Gas Spring replacement parts for Knaack® storage box models 89, 90 and 119.

Mfg. No.	Order No.	Qty.
977-2PK	KNA03397	2-Pack

Ball Studs & Nuts for Gas Springs




Replacement ball studs and nuts for gas springs.

Mfg. No.	Order No.	Qty.
921-4PK	WGD03413	4-Pack



Aluminum Toolboxes Gull Wing™ — Aluminum



Fully foamed lid prevents bending or warping. Stainless steel lock handles for strength, security and rust-free life. Three-compartment sliding tray. 0.063" aluminum one-piece tub and lid to support heavy loads. Self-closing struts auto-close lid. Built-in tool trays and screwdriver holders. Lid opens 90° for easy loading and unloading.

Mfg. No.	Order No.	Dim. In. L x D x H
TB72	UWSTB72	72 x 19-1/4 x 13-1/2

Truck Boxes Side Mount — Aluminum



One-piece tub and lid in bright aluminum diamond tread finish. Includes fully foamed lid to help prevent bending or warping, stainless steel paddle handle lock and MicroSeal™ stripping to seal out moisture, dust and dirt. Lid opens 90° for easy access. Three-compartment sliding tray offers convenient small item storage and retrieval.

Mfg. No.	Order No.	Dim. In. L x D x H	Cap. Cu. Ft.
DCSM48	UWSTBSM48	48 x 11-1/4 x 11	2.6
DCSM60	UWSTBSM60	60 x 11-1/4 x 11	3.3

Truck Boxes Trailer Box — Aluminum



Built-in welded aluminum support for secure mounting on lighter-weight straight tongue trailers. Lockable.

Mfg. No.	Order No.	Dim. In L x W x D
TBV-34-LP	UWSTBV34LP	34 x 16 x 13

CONSTRUCTION EQUIPMENT



ATV Tool Boxes Aluminum



One-piece tub and lid, aluminum diamond tread. Foamed lid and stainless steel paddle handle lock. Lid opens 90°.

Mfg. No.	Order No.	Dim. In.	WxDxH Cap.	Cu. Ft.
ATV	UWSATV	32 x 12 x 12		2.7



Action Packers Black



Durable, weather-resistant construction. Tough, lockable latches (locks not included). Stackable containers easily tie down with bungee cords. Updated with new part number. No physical changes to the product have been effected.

Mfg. No.	Order No.	Size In GAL.
1949231	RUB1949231	24
1949208	RUB1949208	35
1949210	RUB 1949210	48



Drum Fans



24" High Velocity Drum Fan, 2 Speed Settings, Up to 7,500 CFM Airflow. 1/4 HP Industrial Motor.

Mfg. No.	Order No.	Size IN.
MAC-24-DDF-B	MSH24DDFB	24



Portable Fans



2-Speed high velocity motor, 4,500 - 5,500 CFM airflow. 1/3 HP motor, Quiet, long lasting belt drive design reduces vibrations and improves motor performance. 6 in. heavy-duty pneumatic wheels with patented fold-out design, 9 ft. power cord.

Mfg. No.	Order No.	Cord Length Ft.
MAC-30W-DDF	MSH30WDDF	9
MAC-36-BDF	MSH36BDF	8
MAC-42-BDF	MSH42BDF	10



Dryers Sahara TurboDryer®



Use with TurboVent, TurboVent 48" and TurboDuct attachments. Static pressure 3". Three speeds and three positions (0°, 45° and 90°). Includes kickstand. UL and CUL Listed.

Mfg. No.	Order No.	HP	Amps	Max. Rated CFM
F351	DRIF351	0.33	4	2700
F352	DRIF352	1	10	3500



Axial Fans Vortex™



12" axial fan blade can ventilate open spaces or up to 125 ft. of duct. One speed, four positions (0°, 15°, 45° and 60°). 19.2" H x 18.7" W x 15.7" D. Stackable. Includes carpet clamp and kickstand. UL and CUL Listed.

Mfg. No.	Order No.	HP	Rated Amps	Max. Rated CFM
F174	DRIF174	1	7.4	2041

Collapsible Ducting Sto&Go™



For use with Vortex axial fan to ventilate confined spaces. Includes tote bag.

Mfg. No.	Order No.	Duct Dia. In.	Duct Lgth. Ft.
F405	DRIF405	12	25



Air Movers Mighty Mini™



Designed to dry wet carpets/floors with positions for drying walls and ceilings. Three speed air flow control motor. Built-in outlets for multiple unit connections.

Mfg. No.	Order No.	CFM	Cord Lgth. Ft.
1032000	SHP10320	500	10

CONSTRUCTION EQUIPMENT



Air Movers Turbodryer



The B-Air VP-33 delivers 2530 CFM while using only 2.9 amps. With its low amp draw and on-board GFCI outlet, the Vent VP-33 allows up to 4 units to be daisy chained to a single standard 15 amp household circuit. The Vent's multipurpose design allows it to be used at 3 different angles (horizontally, 45° and 90°) to allow air flow in the desired direction. ETL certified for safety.

Mfg. No.	Order No.	CFM	Cord Lgth. Ft.
VP-33RED	AIRVP33	2530	25

Dehumidifier Vantage 1500



The Vantage 1500 dehumidifier combines compact and rugged design with the professional performance needed to get the job done. Standard with its large semi-pneumatic wheels and angled rigid handle, maneuverability and transport is easy and effortless. 7.36 amp @ 115V. 25' drain hose. 25' power cord. Digital controls. Removes over 18 gallons of water per day at 90 percent RH.

Mfg. No.	Order No.	CFM	Dim. In. H x W x D
VG-1500RED	AIRVG1500	325	22-1/2 x 20 x 32



Inverters/Generators 2100 Watts



2100 running Watts/ 2400 Starting Watts, Westinghouse 4 stroke 79cc OHV engine, Power Indicator Lighting, Economy Mode, AC overload reset - unlike other manufacturers who make you shut down the entire unit to rest after an overload situation. Available outlets: (1)Duplex 5-20R, (1) 12V DC, (2) USB-10A

Engine.....4-Stroke, 79cc, OHV
Voltage.....120V AC/12V DC
Noise Rating52 - 59 dBA
Weight.....43 lbs.
Tank Size.....1.3 gallon
Run Time/Tank.....up to 11 hours

Mfg. No.	Order No.	Watts	Dim. In. L x W x H
WH2400i	WESWH2400i	2400	16.5 x 19 x 10.7

Parallel Power Cables



Combines 2 WH2000iXLT or WH2400i units for DOUBLE the power. You may also mix the two models. Also with the TT-30R RV outlet and 120v 20amp outlet. No Bulky Junction

boxes, hardware or complicated ground terminal wiring needed. For use with Westinghouse WH2000iXLT and WH2400i Digital Inverters Only!!

Mfg. No.	Order No.	Amps	Volts
WHPCI	WESWHPCI	20	120



Parallel Power Cables



Combines the power of two Yamaha generators. Cable features include polarized IP30 banana plugs, quick connection to parallel jacks, color-coded wire leads and velcro mounting system. Compatible with standard 30A RV cords.

Mfg. No.	Order No.	Amps	Volts
YPK30RV/1600501	YAM01048	30	115



Generator Cords Hot Max



Converts one L14-30 plug to two lighted 5-20 receptacles. UL Listed. 3-ft heavy duty 10 gauge.

Mfg. No.	Order No.	Wire Size
L14-30EP	PTI00189	10 Gauge



Inverter/Generators 1000 Watt



Features Pulse Width Modulation (PWM); voltage stability within ±0.1 HZ. Auto warm-up feature automatically increases engine speed for 4-6 mins. to ensure smooth power. Smart throttle. 12V DC output, battery-charging cables included. Engine.....50cc OHV 4-stroke
Voltage.....115V AC/12V DC
Noise Rating47 - 57 dBA
Weight.....27.9 lbs.
Tank Size.....0.66 gallon
Run Time/Tank.....up to 12 hours

Mfg. No.	Order No.	Watts	Dim. In. L x W x H
EF1000ISC	YAMEF1000	1000	17.7 x 9.4 x 14.9

CONSTRUCTION EQUIPMENT



Inverter/Generators 2000 Watt — Twin Tech™



Inverter Series® super quiet generator. Features compact design for portability, TwinTech™ capability, OHV engine, Smart Throttle™, inverter system and Noise Block™ sound reducing system. Run time up to 10.5 hours per tank.

Engine..... 79cc OHV 4-stroke
Voltage..... 115V AC/12V DC
Noise Rating 51.5 – 61 dBA
Weight..... 44 lbs.
Tank Size..... 1.1 gallon
Run Time/Tank up to 10.5 hours

Mfg. No.	Order No.	Watts	Dim. In. L x W x H
EF2000ISV2	YAMEF2000	2000	19.3 x 11 x 17.9

Generators 2600 Watt



For powering home appliances, tools and space heaters. Includes Four-stroke OHV engine, auto decompression system, AC voltmeter, oil watch warning system, AC non-fuse thermal breaker, GFCI. 3.2 gallon fuel tank provides up to 11 hours of continuous operation.

Engine..... 171cc OHV 4-stroke
Voltage..... 115V AC
Noise Rating 68 dBA
Weight..... 93 lbs.
Tank Size..... 2.9 gallon
Run Time/Tank up to 11 hours

Mfg. No.	Order No.	Watts	Dim. In. L x W x H
EF2600M	YAMEF2600	2600	20.1 x 16.3 x 16.7



Inverter/Generators 3000 Watt — Remote Start



With Yamaha's Noise Block™ technology, this cabin generator runs at the noise level of a whisper. Features built-in wheels. Yamaha Boost technology 3000 watt increased output comparable to 3500 watt output for up to 10 seconds. This extra boost quickly and efficiently kick starts equipment and appliances. Includes 300 ft. range remote start and battery.

Engine..... 171cc OHV 4-stroke
Voltage..... 115V AC/12V DC
Noise Rating 53 – 60 dBA
Weight..... 154 lbs.
Tank Size..... 3.4 gallon
Run Time/Tank up to 19 hours

Mfg. No.	Order No.	Watts	Dim. In. L x W x H
EF3000ISEB(KIT)	YAMCABIN	3000	26.8 x 17.5 x 21.9

Generators 5500 Watt



OHV engine provides improved efficiency which increases reliability and offers quieter operation. Comes standard with wheels, fold-down/locking handles and battery. Has a Digital Hour Meter/Digital Volt Meter. Displays total run time accumulation for servicing or refueling interval and indicates the voltage output. Recoil Start for easy starting. Full power, full time 120/240 dual voltage perfect for job site or home backup. Full Roll Cage.

Engine..... 389cc OHV
Voltage..... 115/230V AC
Noise Rating 74.1 dBA
Weight..... 212 lbs.
Tank Size..... 6.9 gallon
Run Time/Tank up to 9 hours

Mfg. No.	Order No.	Watts	Dim. In. L x W x H
EF5500D	YAMEF5500	5500	29.1 x 28.4 x 31.5



Generators 6000 Watt



Portable generator with OHV engine, electric start, and oil watch warning. Fuel tank with economy idle allows for up to 8-hours of runtime at full load. Ground Fault Circuit Interruption for added safety. Dual-voltage design allows user to run multiple appliances at 115V and 240V. Digital hour meter and digital volt meter easily monitor maintenance/fueling intervals and voltage output. Rugged design with wheel kit. Full roll-cage protection.

Engine..... 358cc Yamaha OHV
Voltage..... 115V/230V
Noise Rating 74.5 dBA
Weight..... 212 Lbs.
Tank Size..... 6.9 gallons
Run Time/Tank Up to 8 hours

Mfg. No.	Order No.	Watts	Dim. In. L x W x H
EF7200DE	YAMEF7200	6,000	29.1 x 38.4 x 31.5



Generators Powerease



Recoil Start, 4200 Max AC Output, 3500 Max AC Continuous Output. Receptacles: 2 x 120V 20A Duplex 1 x 120V/240V 4 Prong Twistlock. Automatic Voltage Regulator (AVR).

Engine..... 233cc Powerease OHV
Voltage..... 120/240V AC
Noise Rating 70 dBA
Weight..... 120 lbs.
Tank Size..... 3.9 gallon
Run Time/Tank 9 hours

Mfg. No.	Order No.	CC Size.
BE4200PS	BEPBE4200P	223

CONSTRUCTION EQUIPMENT



Generators 6500 Watt



PowerEase engine with electric start. Features low oil shutdown, automatic voltage regulator and 8" wheel kit. Receptacles include four 115V AC standard, one 115V twistlock, one 230V twistlock and one 12V DC.

Engine..... 390cc Powerease OHV
Voltage..... 115/230V AC
Noise Rating74 dBA
Weight..... 198 lbs.
Tank Size..... 6.6 gallon
Run Time/Tank 7 hours

Mfg. No.	Order No.	Watts	Dim. In. L x W x H
BE-6500ERUSC	BEPBE6500	6500	28 x 22 x 23

Generators 9000 Watt



PowerEase engine with electric start. Features low oil shutdown, automatic voltage regulator and 8" wheel kit. Receptacles include six 115V AC standard, one 115V twistlock, one 230V twistlock and one 12V DC.

Engine..... 420cc Powerease OHV
Voltage..... 115/230V AC
Noise Rating78 dBA
Weight..... 225 lbs.
Tank Size..... 6.6 gallon
Run Time/Tank 6.5 hours

Mfg. No.	Order No.	Watts	Dim. In. L x W x H
BE-9000ERUSC	BEPBE9000	9000	29 x 24 x 28



Generators 12000 Watts



Features low oil shutdown, automatic voltage regulator and 8" wheel kit. Receptacles include two 120V 20Amp standard.

Engine..... 390cc Powerease OHV
Voltage..... 115/230V AC
Noise Rating74 dBA
Weight..... 198 lbs.
Tank Size..... 6.6 gallon
Run Time/Tank 7 hours

Mfg. No.	Order No.	Watts
BE-12000ER	BEPBE12000	12000



Generators 5500 Watt



Features compact, wheeled frame for easy transport, provides reliable power supply wherever needed. OHV (overhead valve) engine delivers performance and power, sturdy steel-tube cradle protects the generator's exterior. For safe and comfortable use, the circuit-breaker outlets prevent power overloads, and low-tone muffler makes for ultra quiet operation.

Engine..... 389cc OHV
Voltage..... 115/230V AC
Noise Rating70 - 75 dBA
Weight..... 167 lbs.
Tank Size..... 6.6 gallon
Run Time/Tank up to 10 hours

Mfg. No.	Order No.	Watts	Dim. In. L x W x H
GP5500/5939-0	GEGGP5500	5500	33.5 x 26.5 x 27.5



Generators 7500 Watt



Covered circuit breaker protected outlets provide added protection from the environment and rugged working conditions. Electric start with recoil backup. Battery included. Low oil shutdown prevents engine damage. Low-tone mufflers for quiet operation. Fuel gauge incorporated for at a glance fuel monitoring. Hour meter to track maintenance intervals. Fold down handle and never-flat wheels for portability.

Engine..... 420cc OHV
Voltage..... 115/230V AC
Noise Rating70 - 75 dBA
Weight..... 201 lbs.
Tank Size..... 8 gallon
Run Time/Tank up to 12 hours

Mfg. No.	Order No.	Watts	Dim. In. L x W x H
GP7500E/5943	GEGGP7500E	7500	28.8 x 26.8 x 26.0



Calculators Construction Master® Pro



For completing plans, layouts, bids and estimates in the field or office. Provides feet-inch-fraction construction-math capabilities. Features built-in solutions and preference settings. Includes protective sliding cover.

Mfg. No.	Order No.	Desc.
4065	CL14065	Construction Master® Pro

CONSTRUCTION EQUIPMENT



Estimating Calculators Material Estimator



For calculating material costs in tile, flooring, drywall, fencing and concrete applications. Measures in yards, feet, inches, fractions, and square and cubic meters. Features memory storage, 11-digit LCD display, auto shut-off and paperless tape function. Solar or battery powered. Includes protective cover, battery, and instructions.

Mfg. No.	Order No.	Accy. Digits	Dim. In. L x W x D
4019	CLI00077	12	5.7 x 3 x .65

Desktop Calculators Battery Operated



Features include eight digits, memory calculation, square root/percentage function and negative/positive changeability. Button cell battery included.

Mfg. No.	Order No.	Dim. In. L x W x D
3500	CAL3500	7.64 x 5.71 x .91



Digital Plan Measurers Scale Master Classic

Compact, portable design. Perform linear, rectangular area and volume take-offs instantly with rolling measurement action. Features 72 built-in scales, including architectural, engineering, map and metric. Displays measurements in imperial or metric. Converts between scales and functions. Includes soft case, batteries and user's guide.

Mfg. No.	Order No.	Dim. In.	Resolution In.
6020	CLI6020	6.7 x 1.6 x 0.6	0.025



Two-Way Radios Rechargeable



There are two ways to power your radio: use the included NiMH rechargeable batteries for up to 10 hours or use 3 AA batteries for up to 29 hours. Know the Weather In Advance: Keep updated with real-time weather conditions by turning on one of 11 weather channels or initiating weather alerts. NOAA radio service may not be available in all areas. 22 Channels Each with 121 Privacy Codes: With 22 channels and 121 privacy codes, totaling 2,662 combinations, it's easy to find an available channel.

Mfg. No.	Order No.	Desc.
T260	MOR00082	Fully Compatible

Two-Way Radio Rechargeable



Weatherproof with real-time weather conditions. Built-in LED flashlight and emergency alert button. Includes (3) AA batteries and micro-USB cable for charging. Hands-free option with VibraCall™ feature where ringing can be intrusive. Customize call tones.

Mfg. No.	Order No.	Range Mi.	No. Channels
T460	MOR00069	35	22

Earpiece Headsets with Boom Microphone 2-Way Radio



Hands-free compact, comfortable headset with a boom microphone for use with Motorola radios. Microphone bends for easy positioning. Ear clip secures earpiece. Features Push-to-talk and vox-capability with most TalkAbout 200, 5000, 6000 and 7000 Series and PTT-only with TalkAbout T5100, T5200, fr50 and fr60 radios.

Mfg. No.	Order No.	Desc.
56320	MOR56320	2-way radio earpiece headset

REVERE

Cell Phone Cases Watertight




Holds up to 2 large smart phones. Shatterproof polycarbonate design. O-ring and locking latch keep valuables safe and dry. Fits iPhone 4/5 and Samsung Galaxy S4.

Mfg. No.	Order No.	Dim. In. L x W x H
20-285543-08	REV01891	6-1/4 x 4 x 1-3/4



Alaska Atlas & Gazetteer Maps



Atlas contains city maps/street indexes for Anchorage, Fairbanks, and Juneau. Includes State and National Parks and detailed topographic maps of wilderness areas/wildlife refuges, recreational and travel detail on boat ramps, fishing, trails, campgrounds, historic sites, and natural attractions. Features two page relief fold-out map and index.

Mfg. No.	Order No.	Dim. In.
AA-000004-000	GAZAK	11 x 15-1/2

NEBO® TOOLS Phone Cases CaseBrite



Impact-resistant, non-slip rubber case, Screen protection lip. Fully dimmable, Slim profile.

Mfg. No.	Order No.	Desc.
6347	NEB6347	Fits iPhone 6/6S
6348	NEB6348	Fits iPhone 6/6S Plus

CONSTRUCTION EQUIPMENT



Contractor's Notepads Portfolio Style



Holds 5" x 7" notepad (included). Additional slots for business cards, credit cards, license, etc. Pocket for loose notes and elastic loop for pen or marker. Secure hook and loop closure.

Mfg. No.	Order No.	Dim. In. W x L
5141	CLC05141	6-1/4 x 8-3/4

Clipboards Portfolio Style



Ballistic poly cover with slip resistant spine. Full zipper closure, built-in calculator, and spring clip for writing pad (included). Multiple card pockets, pen and document sleeves.

Mfg. No.	Order No.	Dim. In. W x L
DG5140	CLC95140	10 x 13



Clipboards Storage—Deskmate II



Durable polypropylene construction. Bottom opening for convenient access. Strong low profile clip with plastic grips holds up to 1/2" paper securely. Large internal storage holds pads, pens, etc. Solar powered and battery operated calculator. AG10 button battery included.

Mfg. No.	Order No.	Dim. In. W x D x L
00534	SAU00534	10 x 2-5/8 x 16



Clipboards Portfolio Style — Snapak



Aluminum construction with antimicrobial additive. Features 3/8" side storage compartment, clipboard, hinged writing plate and serrated clip for holding up to 1/2" paper.

Mfg. No.	Order No.	Form Dim. In.
10517	SAU10517	8-1/2 x 12

Clipboards Storage — Redi-Rite



Aluminum construction with antimicrobial additive. Features 1-1/2" storage compartment with divider, self-locking latch, and high capacity clip for holding up to 1" paper. Includes built-in license/card holder.

Mfg. No.	Order No.	Form Dim. In.
11017	SAU11017	8-1/2 x 12

Clipboards Letter/A4 Size



Aluminum construction with antimicrobial additive. Features high tension serrated clip for holding up to 1/2" paper. Includes built-in hanging hole.

Mfg. No.	Order No.	Form Dim. In.
11517	SAU11517	8-1/2 x 12



All-Weather Pens Ball Point Clicker



All-Weather pen writes on wet paper and upside down in temperatures from -30°F to +250°F. Chrome and plastic construction.

Mfg.No.	Order No.	Ink Color
37	RIR03711	Black
57	RIR05711	Red
47	RIR04711	Blue

Mechanical Pencils Waterproof



Tip expands so lead won't break, wobble, twist or fall out. Strong resin barrel fits comfortably in your hand. Made in the USA.

Mfg. No.	Order No.	Pencil/Refills
YE99	RIR00991	Mechanical Pencil
99BR	RIR00990	Black Lead Refill
99RR	RIR00994	Red Lead Refill

All-Weather Notebooks Field Book



Page pattern is dark gray universal, the binding is sewn, the cover is fabrioid (black). Perforated for easy tear out.

Mfg. No.	Order No.	Dim. In.	# Sheets
770F	RIR77021	4-3/4 x 7-1/2	80

All-Weather Notebooks Maxi Top-Spiral



Features Polydura cover, top wire spiral binding and field page pattern (4x4 to the inch).

Mfg. No.	Order No.	Dim. In.	# Sheets
#185T	RIR185	8-1/2 x 11	48

CONSTRUCTION EQUIPMENT



All-Weather Notebooks Top-Spiral Universal



Durable notebook ideal for any all-weather situation. Polydura cover holds 100 pages (50 sheets) of Universal page pattern for notes or scaled drawings. Features drill hole for hanging.

Mfg. No.	Order No.	Dim. In.	# Sheets
169	RIR16911	6 x 9	50

All-Weather Notebooks Side Spiral Universal



Features yellow polydura cover with side wire spiral binding. Universal format with 1/4" rule with faint 1/4" grid.

Mfg. No.	Order No.	Dim. In.	# Sheets
373	RIR37311	4-5/8 x 7	32
393-M	RIR39371	3-1/4 x 5	50

All-Weather Printer Paper Laser or Copier



Copy or laser print your own all-weather forms, charts, maps, and worksheets on patented 8 1/2" x 11" Rite in the Rain All Weather Copier Paper. Now you can have the convenience of using your existing data sheets on a 20# bond weight paper that can survive in any weather condition.

Mfg. No.	Order No.	Dim. In.	# Sheets
8511-50	RIR85115	8.5X11	50



All-Weather Notebooks Top-Spiral Daily Log



Features yellow polydura cover with top wire spiral binding. Contains 50 two-page daily log forms for easy-to-use work site diary.

Mfg. No.	Order No.	Dim. In.	# Sheets
#157	RIR15711	4 x 6	50

All-Weather Notebooks Top Spiral — Pocket-Size



Features Polydura cover, top wire spiral binding and universal page pattern (1/4" rules with faint 1/4" grid). 50 sheets.

Mfg. No.	Order No.	Dim. In.	# Sheets
#135	RIR13511	3 x 5	50
#146	RIR14611	4 x 6	50

All-Weather Notebooks FieldFlex Side Bound Memo



Field-Flex books are great for storing in tight spaces. Large enough to keep all your records in one safe, weather resistant place.

Mfg. No.	Order No.	Dim In.	# Sheets
374-M	RIR37411	3-1/2 x 5	56

All-Weather Notebooks Side Stapled Memo 3-Pack



Field Flex cover is flexible enough to slip into a pocket, while defending against the elements. Patented paper is water-resistant and archival grade. Each notebook contains 24 sheets.

Mfg. No.	Order No.	Dim. In.	# Sheets
371FX	RIR03718	3-1/4 x 4-5/8	24



Stud Sensors Multifunction



StudSensor™ Pro SL-AC quickly and easily locates the edges of wood and metal studs and joists behind walls, floors, and ceilings. Finds edges of studs & joints up to 3/4" deep; DeepScan® mode finds studs up to 1-1/2" deep; Wide LCD array indicates when you approach stud, WireWarning® is active in all modes, Automatically detects hot AC wires up to 2" deep. Requires one 9-volt battery, not included.

Mfg. No.	Order No.	Desc.
61901	SDS61901	Multifunction

Stud Scanners i65



Locates the edges and center of wood or metal studs up to 1 1/2-Inch (38 mm) deep, Easy-to-read LCD display, audio tone and the patented spotLite pointing system indicate stud center. WireWarning detection indicates the presence of live wiring up to 2" deep.

Mfg. No.	Order No.	Desc.
61878/165	SDS61878	One Step



Stud Finders Magnetic



Magnet is attracted to steel nails and screws in drywall. Base of the stud finder is notched for convenient marking once studs are located.

Mfg. No.	Order No.	Dim. In. H x W x L
47-400	STA47400	1-3/8 x 1-1/4 x 1-3/8



CONSTRUCTION EQUIPMENT



Stud Finders Magnetic



Small and compact, fits in your pocket. Very powerful rare earth magnets locate drywall screws, metal studs and conduit. Rotating level for horizontal and vertical leveling. Three anchor points on each side for easy leveling, ideal for remodeling, new construction and DIY projects. No batteries required.

Mfg. No. 03040
Order No. CHH03040
Dim. In L x W x H 4.62 x 1.5 x 7.5



Moisture Meters LED Display



LED ultra-sensitive moisture meter to detect hidden leaks in wood, concrete, plaster and carpet. 10-LED display with two measurement ranges: 7 to 15% and 16 to 35%, full and low battery indications and protective cover to prevent damage. Protective cap doubles as calibration checker. Includes 9V battery. CE and RoHS approved

Mfg. No. MM1E
Order No. GENMM1E
Desc. Analog moisture meter



Laser Distance Measurers



Continuous measurement mode. Accuracy to 1/8 inch. Compact size and shape and will rest on any flat surface. Measures up to 50 ft.

Mfg. No. GLM20
Order No. BMEGLM20
Accy. In. @ 50 Ft. ± 1/8
Working Range Ft. 1/8 to 50

Laser Distance Measurers



Laser Measure provides precise measurements of length, area and volume, with an accuracy of +/-1/16". Continuous-length measurement mode automatically adjusts measurements when walking off distances. A three line backlit display and an IP54 rating.

Mfg. No. GLM40
Order No. BMEGLM40
Mesure Distance 135



Laster Distance Measurer Bluetooth/Color Backlit



Built-in inclinometer allows for advances features like angles, min/max, stake out and double indirect Default real-time measurement shows how distances move in relation to the target.

Mfg. No. GLM50C
Order No. BMEGLM50C
ACCY. At 50 FT +/- 1/16



Self-Leveling Laser Kits Three Beam



2x brighter diode to increase visibility in bright jobsite conditions. Built-in magnetic pivot bracket, 1-button operation and control panel for ease of use, and micro adjust knob for precise alignment of 90° intersecting lines. 5° self-leveling range and Class II laser. Kit Includes: 4-AA batteries for 30 hours of runtime, ceiling mount, and kit box.

Mfg. No. DW089K
Order No. DWTDW089K
Accy. In. @ 30 Ft. ± 1/8
Working Range Ft. 50



Line Lasers Self Leveling



Simulates functionality of rotary laser with bright crossing horizontal and vertical lines. 1/4" and 5/8" thread mounts for versatility. Full-time pulse mode allows use with detector and maintain full brightness. Locking pendulum to prevent damage to internal components. Water/debris resistant.

Mfg. No. DW0811
Order No. DWTDW0811
Accy. In. @ 30 Ft. ± 1/8

Line Lasers Two Beam Self-Leveling



Projects bright crossing horizontal and vertical lines for various applications. Integrated magnetic pivoting base with 1/4" thread. Includes magnetic base and case.

Mfg. No. DW088K
Order No. DWTDW088K
Accy. In. @ 100 Ft. ± 1/8



Line Lasers Two Beam Self-Leveling




Self-leveling for quick setups, bright beams for visibility even in bright conditions. Wide laser beam fan angle for maximum coverage. Versatile mounting accessory can be mounted on most tripods, columns or poles and adjusted horizontally and vertically.

Mfg. No. LT20
Order No. SPALT20
Accy. In. @ 17 Ft. ± 1/16

CONSTRUCTION EQUIPMENT



Line Lasers Self-Leveling



Five Points Plus a Cross-Line: for a two-in-one laser. Highly Visible Laser Points and Lines: for horizontal leveling, vertical alignment, squaring, layout and plumb point transfer. Manual mode: Locks lines for use at any angle. Smart Pendulum System: Self levels and indicates out-of-level condition, locks when switched off for protection during transport. Four Selectable Modes: Easily toggle through 5-point, horizontal line, vertical line or cross-line modes

Mfg. No.	Order No.	Accy. In. @ 100 Ft.
GCL25	BMEGCL25	± 3/8

Pocket Laser Levels Five Beam Self Leveling



Features easy field recalibration to maintain accuracy and prevent downtime. Pocket sized with smart pendulum leveling system that indicates out of level condition, locks when switched off, and self levels. Projects square points, level, and plumb for precise positioning of tool and transfer of points for accurate and easy alignment. Multipurpose attachment allows you to mount and position with magnets, strap, or threaded mounts (1/4"-20, 5/8"-11). Laser diode: Class II 635 nm, ≤ 1 mW; leveling type: self-leveling, up to 5°; range up to 100 ft. Dimensions: 4-1/8" x 3-1/8" x 1-5/8" Includes: Multipurpose attachment, recalibration wrench, mounting strap, belt strap and three AA batteries.

Mfg. No.	Order No.	Accy. In. @ 100 Ft.
GPL5	BMEGPL5	± 1/4



Pocket Laser Levels Three Beam Self-Leveling



GPL3 three-point laser alignment with self leveling plumb and level point projection accurately transfers and aligns level, plumb, 90°, and grade points. With patented diamond-cut beam splitter and single diode that projects all points for accuracy. Includes belt pouch, mounting strap, and recalibration wrench. Multipurpose attachment allows you to mount and position with magnets, strap, or threaded mounts (1/4"-20, 5/8"-11). Water and dust proof to ensure years of dependable operation. Dimensions: 4-1/8" x 3-1/8" x 1-5/8". Includes: Multipurpose attachment, recalibration wrench, mounting strap, belt strap and three AA batteries.

Mfg. No.	Order No.	Accy. In. @ 100 Ft.
GPL3	BMEGPL3	± 1/4

Line Lasers Self-Leveling



Horizontal and vertical line modes project two lines independently or together. One-button operation to select between horizontal, vertical, and cross line modes or turn the tool on/off. Flexible mounting device clamps to multiple surfaces for quick and easy setup. Smart pendulum leveling system self-levels, senses and indicates out-of level condition. Switch slider to lock for transport.

Mfg. No.	Order No.	Accy. In. @33 Ft.
GLL2	BMEGLL2	± 3/16"




Self Leveling Line Lasers 360° — 3 Plane



Rugged and durable construction. Provides bright, crisp laser lines with 360° application for increased working range. Versatile mounting accessories including ceiling track, magnetic, and tripod mounts with rotation and fine vertical adjustments.

Mfg. No.	Order No.	Accy. @ 100 Ft.
LT56-2	SPALT56-2	± 1/4


Rotary Laser Level Kits Self-Leveling — Interior / Exterior

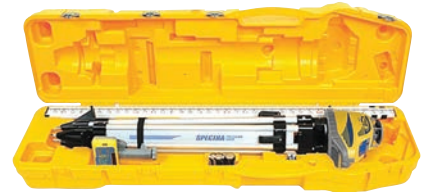

Includes a 10ft. grade rod. Rotation Sp: 600 rpm fixed. Grade Capability: Single cross axis manual slope mode. Leveling Type: Auto. Rating: Class 3A/3R, Laser Output: ±5deg. Self Leveling Range: ±5deg. Working Temp: -4°F-122°F. Comes with hard carry case.

Mfg. No.	Order No.	Accuracy In. @ 100Ft..	Working Range Ft.
LL300S-2	SPALL300S2	± 3/32	1300

Rotary Laser Level Kits

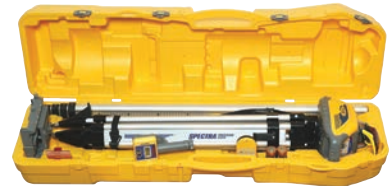

Complete leveling crew in a case, laser, tripod, receiver and clamp, grade rod, all interior accessories, and alkaline batteries in a portable hard shelled carrying case, Highly rugged design withstands a direct drop up to 3 ft (1 m) onto concrete, reduces downtime. Fully automatic self leveling in horizontal and vertical planes, fast, easy setups and professional quality accuracy.

Mfg. No.	Order No.	Desc.
HV101GC-2	SPAHV101GC	KIT

CONSTRUCTION EQUIPMENT



BOSCH

Laser Level Three Beam with Beam Splitter



Single diode projects all points. Three beams projection accurately transfers and aligns plumb, level, square, and grade points. Precision-crafted, anodized and machined for accuracy and durability. Dimensions: 9-1/2" x 1" x 1-3/4". Includes leveling base, V-groove, magnets, 1/4"-20 tripod mount, belt pouch, and three AAA batteries.

Mfg. No.	Order No.	Accy. In. @ 75 Ft.	Working Range Ft.
GPL3T	BMEGPL3T	± 1/4	100

CST/berger

No One Measures Up... Worldwide

Magnetic Locators Magna-Trak 200™ Series



Informative LCD display for signal strength and indicators with two digit numeric signal indicator, expanding analog bar-graph signal indicator, flashing low battery indicator. Includes: Magna-Trak 202™ Series Magnetic Locator and soft carrying case. Six AA batteries not included.

Mfg. No.	Order No.	Locating Depth Ft.
19-202SC	BME19202SC	Up to 15



Automatic Level Kits Spectra Precision®



28X magnification, water resistant construction. Designed for elevation and alignment tasks including general building construction, cut/fill measurements, area leveling, and landscaping. Telescope optics provide clear, sharp images, and short focusing distance for performance in tight spots or steep slopes. Includes hard-shell carrying case 15' grade rod, and tripod.

Mfg. No.	Order No.	Accy. In. @100 Ft.	Range Ft.
AL28M-2	SPAAL28M-2	±1/16	2600



Laser Receivers Digital Readout



Laser receiver for basic and advanced leveling and aligning applications. The receiver works with any red beam rotating laser and is designed for all general, concrete and site preparation contractors. Easy-to-use tool that accurately measures elevations across the site.

Mfg. No.	Order No.	Desc.
HL450	SPAHL450	Rotating laser receiver

Aluminum Tripods Quick Clamp



Accommodates instruments with 5/8"-11 thread. Ideal for mounting lasers, total stations and auto levels. Telescoping legs allow for setup at various heights. Extends 65" and features flat head.

Mfg. No.	Order No.	Max Extension In.
5301-27-BLK	SPA5301-27	65



Aluminum Tripods Professional



Increased stability during work. Work heights from 3' to 8'. 1/4" tripod thread for fast connection of all line and point laser models and good transportability due to low weight.

Mfg. No.	Order No.	Max. Extension In.
BT250	BMEBT250	98

CST/berger

No One Measures Up... Worldwide

Hand Levels Pocket-Sized




For preliminary surveying and distance estimation. Sturdy, impact-resistant aluminum body with protected, easy-to-read vial. 6" L x 6.75" W x 2" H. Includes instruction manual and pocket clip.


Mfg. No.	Order No.	Desc.
17-620A	BME17031	Pocket sighting level



Leveling Rods



Fiberglass



Aluminum

Fiberglass: Rectangular shape with rounded back corners for better gripping. Scale width graduated to fill the entire face of rod and a measuring scale on the backside that allows for overall height readings. Top section features a 1/4 x 20 female adapter. Fiberglass is waterproof, corrosion resistant and non-conductive.

Aluminum: Made of light and durable alloy. Sections are anodized, silk-screened with moisture resistant ink and extend to 13' 1-3/8". Each section uses sturdy polycarbonate buttons that lock each section when extended. Height gauge on back.

Mfg. No.	Order No.	Lgth. Ft.	Sections	Grad.
Fiberglass				
92041	SPA92041	16	4	10ths
92042	SPA92042	16	4	Inches
Aluminum				
7321-40	SPA7321-40	13	4	Inches

www.aih.com

AIH ORDER DESK 907.276.7201 • 1-800-478-7201



**ALASKA INDUSTRIAL
HARDWARE**
A BSNC
COMPANY

CONSTRUCTION EQUIPMENT



Mud Mats Portable



For construction sites, agriculture, golf courses, parks, & other soft ground condition areas where vehicle access is required. Can be unrolled on any muddy or swampy ground & driven over without rutting, getting stuck or tracking mud off-site. Pocketed, double-wall, high-strength fabric with high tensile reinforcing ribs confined within each sleeve allows for easy deployment & structural stability. Ground pressure from tires is reduced up to 40 times, causing minimal ground disturbance.

Mfg. No.	Order No.	Dim. Ft. W x L
580000001	ACF5800001	8 x 15

Barrier Fences Plastic



Constructed of high-density polyethylene with 1-1/4" x 3" mesh opening. Bright safety orange color resists fading. Withstands temperatures from -60°F to 180°F. Break strength of 1200 lbs. Use as safety, containment or snow fence.

Mfg. No.	Order No.	Length Ft.
BF4X10-16	POL28044	100

Hub Stakes




Measures 2" x 2". 25 per bundle.

Mfg. No.	Order No.	Lgth. In.
8" HUB	STK8HUB	8
12" HUB	STK12HUB	12



Surveyors' Stakes



STK24RT




STK36FS

Red Top: 50 per bundle.
Green Top: 25 per bundle.

Mfg. No.	Order No.	Lgth. In.	Top Color
24" RED TOP	STK24RT	24	Red
36" RED TOP	STK36RT	36	Red
48" RED TOP	STK48RT	48	Red
36" FORM STAKES	STK36FS	36	Green

SWANSON Marking Whiskers



6" tall. 25 per package.

Mfg. No.	Order No.	Color
MWPG61000	SWN64403	Glo-pink



Stake Flags



For surveying applications. PVC construction. Flag measures 2-1/2" x 3-1/2" on 21" long stake. 100 per package.

Mfg. No.	Order No.	Color
STK21GO	KESSTK21GO	Fluorescent orange
STK21GR	KESSTK21GR	Fluorescent red
STK21GL	KESSTK21GL	Fluorescent lime
STK21GP	KESSTK21GP	Fluorescent pink



Counters Handheld



One-click counter is easy to read and use. Simply click the lever for each count. Counts up to 9,999 and can be tallied without resetting. Chrome case and finger loop for comfort and security. Ruggedly constructed for years of trouble-free use.

Mfg. No.	Order No.	Desc.
TM100	KES01023	Handheld counter



Sewing Machines Poly Film



Join sheets of poly film together. Portable, trigger-type switch, standard needles, and thread cones.

Mfg. No.	Order No.	Desc.
C10NS	SEWC10NS	Industrial sewing machine

Sewing Threads



Nylon sewing machine thread for the C10NS sewing machine.

Mfg. No.	Order No.	Lgth. Ft.
THREAD B-CLOSER	SEWTHREAD	2500

Sewing Machine Needles



For use with model C10NS sewing machine.

Mfg. No.	Order No.	Size	Pkg. Qty.
FD5-GB	SEWFD5GB	D-5	10



CONSTRUCTION EQUIPMENT



Reinforced Poly Rolls Clear




Clear, four layer reinforced extrusion laminate with clear high-strength polyethylene outer layers. Temporary applications requiring lightweight, tear-resistant film.

Mfg. No.	Order No.	Size Ft. W x L	Desc.
20X1006MIL CL PL	ACF20100CL	20 x 100	Clear
20X100FLAME	ACF20100FL	20 x 100	Flame retardant
40X1006MIL CL PL	ACF40100CL	40 x 100	Clear
60X1006MIL	ACF60100CL	60 x 100	Clear



Poly Films Ma Ka® — Blue Stripe™




All-purpose jobsite protective material. Reinforced construction resists weather and tearing. Roll length 100 ft.

Mfg. No.	Order No.	Width Ft.
20'x100' Clear	MAX20100C	20
40'x100' Clear	MAX40100C	40
20'x100' FLAME*	MAX20100FL	20

* Flame retardant.



Polyethylene Films "Weather-All"

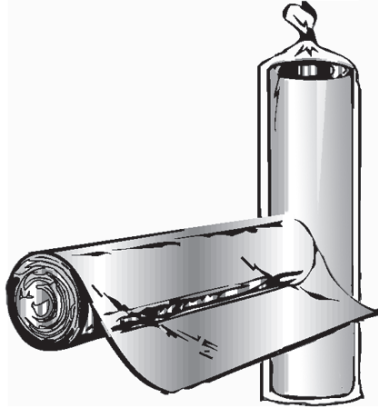


Polyethylene wound on laminated core. Conforms to product standard PS 17-69.

Mfg. No.	Order No.	Width Ft.	Lgth. Ft.	Thick. Mil
Economy Rolls				
9' X 400' 1 MIL	TRM94001C	9	400	1
8'4"X200' 2MIL	TRM82002C	8-1/3	200	2
12'X 200' 2 MIL	TRM122002C	12	200	2
8'X100' 4MIL	TRM81004C	8	100	4
10'X100' 4MIL	TRM101004C	10	100	4
12'X100' 4MIL	TRM121004C	12	100	4
16'X100' 4MIL	TRM161004C	16	100	4
20'X100' 4MIL	TRM201004C	20	100	4
8'4"X100' 6MIL	TRM81006C	8-1/3	100	6
10'X100' 6MIL	TRM101006C	10	100	6
12'X100' 6MIL	TRM121006C	12	100	6
14'X100' 6MIL	TRM141006C	14	100	6
16'X100' 6MIL	TRM161006C	16	100	6
20'X100' 6MIL	TRM201006C	20	100	6
24'X100' 6MIL	TRM241006C	24	100	6
40'X100' 6MIL	TRM401006C	40	100	6
20X100 8MIL	TRM201008C	20	100	8
20'X100' 10MIL	TRM2010010	20	100	10
Consumer Rolls				
10'X25' 4MIL	TRM10254C	10	25	4
Convenience Rolls				
8'X50' 4MIL	TRM8504C	8	50	4
10'X50' 4MIL	TRM10504C	10	50	4
12'X50' 4MIL	TRM12504C	12	50	4
Black Poly				
10'X25' 4MIL	TRM10254B	10	25	4
12'X100' 4MIL	TRM121004B	12	100	4
20'X100' 6 MIL	TRM201006B	20	100	6



Tarps Polyethylene — Reversible



Heavy duty industrial polyethylene material is laminated on both sides for maximum weatherproofing. Cross weave fabric with rope reinforced hem. High strength rust-resistant grommets on each corner. Reversible.

Mfg. No.	Order No.	Cut Size Ft.	Color
10068	FOR68BR	6 x 8	Brown/Green
20068	FOR68SL	6 x 8	Silver/Brown
10810	FOR810BR	8 x 10	Brown/Green
20810	FOR810SL	8 x 10	Silver/Brown
11012	FOR1012BR	10 x 12	Brown/Green
21012	FOR1012SL	10 x 12	Silver/Brown
21020	FOR1020SL	10 x 20	Silver/Brown
11216	FOR1216BR	12 x 16	Brown/Green
21216	FOR1216SL	12 x 16	Silver/Brown
11224	FOR1224BR	12 x 24	Brown/Green
21224	FOR1224SL	12 x 24	Silver/Brown
11620	FOR1620BR	16 x 20	Brown/Green
21620	FOR1620SL	16 x 20	Silver/Brown
11824	FOR1824BR	18 x 24	Brown/Green
22020	FOR2020SL	20 x 20	Silver/Brown
12030	FOR2030BR	20 x 30	Brown/Green
22030	FOR2030SL	20 x 30	Silver/Brown
23040	FOR3040SL	30 x 40	Silver/Brown

Tarps Canvas



Super-heavy duty industrial drab green canvas. Water/mildew resistant. Double stitched hems and seams. Brass grommets approx. every 18".

Mfg. No.	Order No.	Dim. In. W x L
60068	FOR68C	6 x 8
60810	FOR810C	8 x 10
61012	FOR1012C	10 x 12
61216	FOR1216C	12 x 16
61620	FOR1620C	16 x 20

CONSTRUCTION EQUIPMENT



Tarps Polyethylene



Laminated poly tarp with built-in heavy duty drawstring. Openings at all 4 corners for easy cinch. Green.

Mfg. No.	Order No.	Cut Size Ft.
50066	FOR66GD	6 x 6

Tarps Polyethylene



6 oz. per square yard. 11-12 mil thickness, Light Block Out Tarp. Grommets Spaced 18 inches apart - Reinforced Corners. UV stabilizers on both sides. Finished 6 inches or up to 2 percent smaller.

Mfg. No.	Order No.	Desc.
51012	FOR1012BLK	Polly Tarp



Grommet Kits Solid Brass



Repair canvas, tarps, tents, awnings and more. Kit contains grommets, hole cutter, backer block, hardened mandrel, anvil, and setting tool with knurled body and size markings.

Mfg. No.	Order No.	Desc.
Brass Grommet Kits		
71260	GEN71260	1/4" kit w/ 48 grommets
71262	GEN71262	3/8" kit w/ 24 grommets
71264	GEN71264	1/2" kit w/ 24 grommets
Brass Grommet Refills		
1261-0	GEN1261-0	1/4" refill w/ 24 grommets
1261-2	GEN1261-2	3/8" refill w/ 24 grommets
1261-4	GEN1261-4	1/2" refill w/ 24 grommets



Locking Tarp Clips Crocodile



For tarps, vinyl signs and banners, blinds, tents, boat covers, and awnings or to attach lanyards for lightweight items to clothing and backpacks. Powerful locking jaws for materials up to 1/4" thick without causing holes or damage. Re-closable slide lock collar enables clip to be repositioned and reused repeatedly. 1001 emergency uses. 3-1/4" long x 1-1/4" wide x 3/4".

Mfg. No.	Order No.	Desc.
70002	FOR70002	Crocodile Clips



Burlap Rolls



100% jute. Burlap is biodegradable and extremely versatile across a number of agricultural and home applications. Most commonly used in home decorations, weddings, arts and crafts and nursery applications.

Mfg. No.	Order No.	Dim. Ft. W x L
100Z BURLAP	MAXBURLAP	5 x 300

Fisher Bag Company Burlap Bags



Heavy-duty natural fabric that is biodegradable.

Mfg. No.	Order No.	Dim. In. L x W
14 X 26 1/2	FIS14X26	26 x 14
18 X 24	FIS18X24	24 x 18
36 X 48 F.S.	FIS36X48	48 x 36

Fisher Bag Company Sandbags



White poly bag with UV inhibitor

Mfg. No.	Order No.	Dim. In. L x W
14" X 26"	FISB1426	26 x 14

M_{INC.} Bulk Bags Poly



Flexible intermediate bulk container, capable of holding over 3000 pounds of material. Often filled with sand used as a water barrier in streams or rivers. Measures 3ft x 3ft x 3ft

Mfg. No.	Order No.	Cu. Ft. Cap.
14981-0-3	MUT14981	27

ENERPAC[®] Hand Pumps



Large capacity for powering cylinders and tools. Lightweight and compact. Glass-filled nylon reservoir and nylon-encapsulated aluminum base for corrosion resistance. 55 cu. in. oil capacity. Internal pressure relief valve provides overload protection. Two-speed operation minimizes operator fatigue. Maximum handle effort 93 lbs. Includes non-conductive fiberglass handle with lock.

Mfg. No.	Order No.	Pressure Rating PSI		Oil Disp. Cu. In.*	
		1st Stage	2nd Stage	1st Stage	2nd Stage
P-392	ENR10707	200	10,000	.687	.151

* Per stroke.

ENERPAC Hand Pumps



Large capacity for powering cylinders and tools. Internal pressure relief valve for overload protection. External load release valve for single-acting cylinder operation.

ENR10705: Single-speed. Maximum handle effort of 111 lbs. 40 cu. in. oil capacity.

ENR10740: Two-speed for reduced operator fatigue. Use where greater oil capacities are required, or where cylinder plunger must advance rapidly to contact load. Maximum handle effort of 104 lbs. 134 cu. in. oil capacity.

Mfg. No.	Order No.	Pressure Rating PSI		Oil Disp. Cu. In.*	
		1st Stage	2nd Stage	1st Stage	2nd Stage
P-39	ENR10705	—	10,000	—	.16
P-80	ENR10740	350	10,000	.99	.15

* Per stroke.

Hydraulic Pumps Turbo Air



For operation of single-action cylinders. Momentary air-inlet treadle provides advance, hold and retract functions.

Mfg. No.	Order No.	Cap. Cu. In.
PATG-1102N	ENR11873	127

Low-Height Cylinders



Single-action spring return. Baked enamel finish for corrosion resistance. Low-profile for confined spaces. Plated steel plunger with plunger wiper reduces contamination. Grooved plunger end with threaded holes for tilt saddle mounting. Includes coupler and dust cap.

Mfg. No.	Order No.	Cap. Tons	Stroke In.	Oil Cap. Cu. In.
RCS-101	ENR30210	10	1.50	3.35

ENERPAC Single-Acting Cylinders



Features collar threads, plunger threads and base mounting holes for easy fixturing. Can be used in any position. Constructed from alloy steel for durability with baked-enamel finish for corrosion resistance. Heavy-duty return springs. Includes coupler and dust cap. **Note:** Nickel plating available on most models.

Mfg. No.	Order No.	Cylinder Cap. Tons	Stroke In.	Oil Cap. Cu. In.	Ht. In.*
RC-102	ENR30076	10	2.13	4.75	4.78
RC-104	ENR30080	10	4.13	9.23	6.75
RC-106	ENR30082	10	6.13	13.70	9.75
RC-506	ENR30164	50	6.25	69.03	11.13

* Collapsed.

Hollow Plunger Cylinders



Allows for push and pull forces. Collar threads for easy fixturing. Baked enamel finish provides corrosion resistance. Single-acting spring return.

Mfg. No.	Order No.	Cylinder Cap. Tons	Stroke In.	Oil Cap. Cu. In.	Ht. In.*
RCH-202	ENR30261	20	2.00	9.46	6.38

* Collapsed.

Wedgie Cylinders



For use in very confined work areas. Single-acting with spring return.

Mfg. No.	Order No.	Spreader Cap. Tons	Tip Clear. In.	Oil Cap. Cu. In.
WR-5	ENR80094	1.0	.38	.61

ENERPAC Hydraulic Hoses & Couplers

High-Pressure



Rubber coated with two layers of steel wire braid. Flexibility is ideal for long hose runs. 10,000 PSI maximum operating pressure. Includes quick disconnect fittings.

Mfg. No.	Order No.	Dim. Dia. In. x Lgth. Ft.
HC-9206	ENR20366	3/8 x 6
HC-9210	ENR20367	3/8 x 10

3/8" NPT Couplers



Mfg. No.	Order No.	Desc.
C-604	ENR20108	Male/female set
CR-400	ENR20120	Female
CH-604	ENR20117	Male

Hydraulic Pressure Gauges



Low mount design.

Mfg. No.	Order No.	Dia. In.	Cap. PSI	Fitting Size In.
G2535L	ENR22301	2-1/2	0-10,000	1/4 NPTF



Accessories

Mfg. No.	Order No.	Desc.	Dim. In. W x L x H
GA-3	ENR20532	In-line port gauge adapter	1/4 x 3/8 x 38

CONSTRUCTION EQUIPMENT



Hydraulic Body Repair Kits Porto-Power



OMGB65114

Repair kit features snap-lock design for quick and easy assembly, automatic pump overload system and heavy walled extension tubes. Flex head has permanently molded rubber pad and long handles to provide low pumping effort. 1/2 ton capacity hydraulic spreads from 5/8" to 3-3/4".

OMGB65114: Includes plastic molded case, 4-ton hydraulic pump and ram, 6' hose with coupler, rubber head, flat base, 1/2-ton spreader, ram toe, plunger toe, wedge head, 90° V base, serrated saddle, 3", 6", 8-1/2", 16-1/2" and 19-1/2" extension tubes, male connector, 1/4" NPT female and male couplers.

OMGB65115: Includes storage case with wheels, 10-ton hydraulic pump and ram, 6' hose with coupler, male connector, flat base, rubber head, plunger toe, 1/2-ton spreader, serrated saddle, 90° V base, ram toe, wedge head, 4", 10", 18" and 27" extension tubes, 1/4" NPT female and male couplers.

Mfg. No.	Order No.	Ram Cap. Tons	Pump Cap. PSI	Ram Ext. Ht. In.
B65114	OMGB65114	4	8000	15-3/4
B65115	OMGB65115	10	10,000	19-3/4

ENERPAC

Hydraulic Oils



For maximum pump efficiency. Provides maximum internal heat transfer and protective lubricity, prevents cavitation. Contains additives to prevent oxidation and sludge.

Mfg. No.	Order No.	Size Qt.
HF-101	ENR21254	1



Hose Reels PVC — Retractable



Retractable hose reel. Durable plastic case resists cracking. Portable design can also be wall mounted. Non-marking PVC hose.

Mfg. No.	Order No.	PSI	Lgth. Ft.
PA500400AV	CAMPA5004	300	50



Air Hose Reels Retractable



Steel construction. Spring powered auto-rewind. Mounting brackets for permanent fixture. Guide arm adjustable for different angles. Locking ratchet brake. Valve assembly handles up to 250 PSI and 25 CFM. Rubber hose included.

Mfg. No.	Order No.	Hose Dia. In.	Hose Lgth. Ft.
RAH25	GLORAH25	3/8	25
RAH50	GLORAH50	3/8	50
RAH1250	GLORAH1250	1/2	50



xAir Hoses Recoil



Standard-duty; constructed from Nylon 11. Features dual 1/4" swivel fittings. Yellow. Display pack.

Mfg. No.	Order No.	Dia. In.	Lgth. Ft.
4-25E-RET	AMF425D	1/4	25



Hose Reels Flexzilla®



Durable polypropylene construction with auto retract design. Adjustable hose stopper. Tough, lightweight hose designed to remain flexible at low temperatures. Maximum working pressure: 150 PSI.

Mfg. No.	Order No.	Hose Cap.
L8230FZ	LEGL8230FZ	Up to 30 ft. of 3/8" hose



Air Hoses Polyurethane — Flexcoil®



For use in applications such as auto repair, boat building, car wash systems, tire shops and water purification systems. Resists leaking, abrasion, oil and fuel. Recommended for impact tool applications.

Mfg. No.	Order No.	Lgth. Ft.	Fittings
PU14-10AT	CHP90353	10	Rigid



Air Hoses Horizon®



Synthetic rubber tube reinforced with synthetic fabric. Spiral braided construction. 150 to 200 PSI working pressure. Withstands temperatures from -20°F to 190°F. Use in industrial, agricultural and construction applications.

Features quick couplings, short and long shanks, and one-time use or reattachable fittings.

Mfg. No.	Order No.	Lgth. Ft.	Size In.
AW1/4X25G	HPS1425	25	1/4
AW3/8X25G	HPS3825	25	3/8
AW3/8X50G	HPS3850	50	3/8
AW3/8X100GY	HPS38100	100	3/8
AW1/2X50GY	HPS1250	50	1/2



CONSTRUCTION EQUIPMENT



Air Hoses Flexeel® — Polyurethane



Tough, lightweight hose designed to remain flexible at low temperatures. Reinforced, UV-stabilized construction for longer outdoor service life. 1/4" MPT fitting.

CHP53268: Features 1/4" automotive ball swivel coupler on one end and 1/4" air safety plug connector on other end. Includes built-in strap for easy coiling and storage.

Mfg. No.	Order No.	ID In.	Lgth. Ft.
Transparent Blue			
PFE40504T	CHP40504	1/4	50
PFE41004T	CHP41004	1/4	100
PFE60504T	CHP60504	3/8	50
PFE61004T	CHP61004	3/8	100
Hi-Vis Green			
PFX4050GS16XS	CHP53268	1/4	50

Air Hoses Yellow Belly™ — PVC



High visibility hose with brass fittings. Made from hybrid PVC resin. Rolls out and lays flat. Flexible in temperatures -40°F to 140°F. Resists kinking under pressure. Abrasion and chemical resistant.

Mfg. No.	Order No.	Dia. In.	Lgth. In.
YB40504Y	CHP10973	1/4	50
YB60504Y	CHP10975	3/8	50
YB61004Y	CHP10976	3/8	100



Air Hose Connectors Whip Attachment



Connects between tool and air hose for increased safety and mobility. Prevents hand contact with air tool while connecting to live air hose. 1/4" NPT connection.

Mfg. No.	Order No.	Dia. In.	Lgth. Ft.
MP5137	CAMMP5137	3/8	2.5

Air Line Accessory Kits



Includes blowgun, safety nozzle, inflator adapter, tapered inflation nozzle, inflation needle, air ck, I/M 1/4" NPTF coupler, I/M 1/4" NPTM plug, I/M 1/4" NPTF plug, 1/4" NPTF coupling.

Mfg. No.	Order No.	Desc.
MP296600AV	CAMMP2966	10-pc. air line access. kit

Air Line Accessory Kits



Kit comes equipped with 17 pieces of air tools and accessories, including a blow gun, a safety nozzle, and a dual foot air chuck. Includes: (1) Blowgun, (1) Safety nozzle, (1) Inflation adapter, (1) Tapered inflation nozzle, (1) Inflation needle, (1) Dual foot air chuck, (1) Tire gauge, (6) Plugs, (2) Male coupling, (1) Female coupling. Specifications: I/M 1/4", Weight: 1.43 lbs., Dimensions: 10.75" H X 1.2" W X 7.75" D

Mfg. No.	Order No.	Desc.
MP2847	CAMMP2847	17-Pc. air line accessory kit



Blow Gun Kits



Pistol-grip blow gun with brass-reinforced inlet. Includes non-safety, standard safety, safety tip booster, high volume safety, inflator and rubber tips, 10" safety extension and five needles. Packaged in molded carrying case.

Mfg. No.	Order No.	Inlet Dia. In.	Max. PSI
BG-KITC	CHPBGKITC	1/4	150



Blow Guns OSHA Style



For drying or cleaning debris from work surfaces. Features non-slip trigger, safety nozzle with bleeder holes, and finger guard/hanging hook.

Mfg. No.	Order No.	Conn. In.
MP2167	CAMMP2167	1/4 NPT Female



Blow Guns Heavy-Duty



For use in construction and other applications requiring a rugged design. OSHA compliant when used on regulated line of 30 PSI or less. Caution: Does not include safety bypass to relieve tip pressure in case of blockage.

Mfg. No.	Order No.	Nozzle Thread In.
205D	AMF205	1/8 NPT

CONSTRUCTION EQUIPMENT

Amflo

Blow Guns Safety



Tamper-proof, non-removable swivel tip. Built-in restrictors limit pressure to 30 PSI when inlet pressure is 150 PSI or less, and prevents buildup in case of outlet obstruction. OSHA compliant when used on air line of 150 PSI or less. Note: For use on regulated compressed air lines only.

Mfg. No.	Order No.	Inlet Size In.	Outlet Size In.
204-30A-RET	AMF20430A	1/4 NPTF	1/8

COILHOSE PNEUMATICS

Blow Guns Siphon Tip



1/4" NPT female inlet thread and 1/8" NPT female outlet thread. Four self-lubricating O-rings prevent valve leakage, making blowgun repairs unnecessary. Zinc die cast body.

Mfg. No.	Order No.	Type
602-DPB	CHP602	Siphon

CH CAMPBELL HAUSFELD

Blow Guns Pistol Grip



Clears debris from narrow spaces with trigger pressure control. 1/4" female NPT air inlet.

Mfg. No.	Order No.	Nozzle Lgth. In.
MP5143	CAMMP5143	3

COILHOSE PNEUMATICS

Blow Guns Typhoon®



High volume blow gun for heavy duty clean up and blow-off. Lightweight and sleek design. Meets or exceeds OSHA regulations, and features a variable flow trigger for controlled blow-off.

Mfg. No.	Order No.	Size In.
TYP-2500CS	CHP92898	1/4 NPT

Blow Guns Typhoon® Pro



Provides high volume air flow for use in paint applications. Chrome plated aluminum body with chrome plated brass tip. Features variable flow control for precise air delivery. 34 CFM at 125 PSI., 2.1 lbs. of thrust. OSHA compliant.

Mfg. No.	Order	Dim. In. L x W x H
TYP-2501CS	CHP93458	10.5 x 5.75 x 2.125

Amflo

Blow Gun Nozzles Rubber Tip



For blowing out lines or for delicate cleaning tasks where metal tip may cause damage.

Mfg. No.	Order No.	Pkg. Qty.
99005	AMF99005	1

COILHOSE PNEUMATICS

Blow Gun Tip Kits Needle



For tight cavities and crevices. Stainless steel construction with nickel plated brass base. 1/8" MPT. Includes tip sizes .042" x 15/16", .050" x 1-3/16", .072" x 1-3/4", .095" x 2-15/32" and .134" x 2-3/4".

Mfg. No.	Order No.	Desc.
SNT-KIT-DPB	CHP22365	5 Needle tip assortment

Regulators Miniature Series



Designed for confined spaces with low flow requirements. Die-cast zinc body with high-impact plastic adjusting knob. Pressure range 0-125 PSI. Optional pressure gauge available.

Mfg. No.	Order No.	Pipe Size In.	Max. PSI	Max. Oper. Temp. ° F
MFC2-G-CS	CHP30089	1/4	250	250

Regulators 26 Series



Compact design with 3/8" die-cast aluminum body. Balanced poppet valve design, self-relieving feature and locking adjustment knob. 0 to 125 PSI range; 250 PSI max. Input pressure. 250°F max. operating temp.

Mfg. No.	Order No.	Pipe Size In.
26R2-CS	CHP12914	1/4
26R3-CS	CHP12918	3/8

CONSTRUCTION EQUIPMENT



Regulators 27 Modular Series



Die-cast aluminum 1/2" body for high flow rate. Can be connected to units with modular clamps or pipe nipples. Features non-rising adjusting knob, balanced poppet valve and self-relieving feature. 1/4" gauge ports can be used as secondary outlet ports. 0 to 125 PSI range. Measures 5-1/2" H x 2-3/4" dia.

Mfg. No.	Order No.	Pipe Size In.	Max. PSI	Max. Oper. Temp. °F
27R4	CHP12925	1/2	250	250

Filters/Regulators 26 Series



Combines filter and regulator into one design. Features 40 or 5 micron filter element, bowl guard and balanced poppet valve. 0-125 PSI pressure range.

Mfg. No.	Order No.	Pipe Size In.
26FC2-CS	CHP12811	1/4
26FC3-CS	CHP12812	3/8

Air Regulators



Regulates pressure to prolong service life of air tools and ensure best performance. Female 1/4" NPT connections. With gauge.

Mfg. No.	Order No.	Max. PSI
MP1042	CAMMP1042	160

Air Adjusting Valves



Efficient air flow design minimizes pressure drop to tool and adjusts air flow at the spray gun. Adjustable from 0 to 125 PSI

Mfg. No.	Order No.	Desc.
MP3276	CAMMP3276	For spray guns



Filters/Regulators Miniature Series



Combines filter and regulator into one design. Features 20 micron filter element and 0-160 PSI pressure gauge.

Mfg. No.	Order No.	Pipe Size In.	Pressure Range PSI
MR2-G-CS	CHP30081	1/4	0 to 125



Air Tool Oilers In-Line

Attaches between tool and air hose for lubrication during use. Adjustable oil feed regulates amount of oil in airflow. Warning: Do not use oil or other lubricants in paint spraying applications.

Mfg. No.	Order No.	Connections In.
MP2680	CAMMP2680	1/4 NPT Male/Female

Mini Filters



General-purpose 5 micron filter removes most solid and liquid contaminants from airflow, including dust, dirt, scale, water and oil. See-through bowl for monitoring fluid level. Manual drain. 1/4" female NPT connections. Provides up to 21 SCFM @ 90 PSI.

Mfg. No.	Order No.	Max. PSI	Connections In.
MP513803AV	CAMMP5138	150	1/4 NPT Female



Filters Miniature Series



Designed for confined spaces with low flow requirements. Die-cast zinc construction. Features 20 micron filter element, manual drain for fluid removal and 1.5 oz. bowl capacity. Measures 4" H x 1-1/2" dia.

Mfg. No.	Order No.	Pipe Size In.	PSI	Max. Oper. Temp. °F
MF2-CS	CHP30077	1/4	150	120

Filters 26 Series



Compact design with die-cast aluminum construction. Features 40 micron filter element, and 3.8 oz. bowl with guard. Measures 6" H x 2" dia.

Mfg. No.	Order No.	Pipe Size In.
26F2-CS	CHP12786	1/4
26F3-CS	CHP12792	3/8

Filters 27 Modular Series



1/2" body allows high flow rate. Can be assembled with pipe nipples or clamp. Features 40 micron filter element, 8.5 oz. zinc metal bowl with bowl guard and sightglass. Measures 7-1/2" H x 2-3/4" dia.

Mfg. No.	Order No.	Pipe Size In.	Max. PSI	Max. Oper. Temp. °F
27F4-S	CHP49398	1/2	250	250

CONSTRUCTION EQUIPMENT



Lubricators 26 Series



Compact design with 3/8" die-cast aluminum body. Fixed delivery rate for even lubrication. Features tamperproof cap and 3.8 oz. bowl with guard. 150 PSI maximum supply pressure.

Mfg. No.	Order No.	Pipe Size In.
26L2-CS	CHP12879	1/4
26L3-CS	CHP12880	3/8

Lubricators 27 Modular Series



Provides even distribution of oil. Die-cast aluminum construction with tamperproof adjustment cap, metal bowl and bowl guard and quick fill plug for use with quick fill equipment. Measures 8" H x 2-3/4" dia.

Mfg. No.	Order No.	Pipe Size In.	Max. PSI
27L4-S	CHP49726	1/2	250




Air Filters Desiccant



Desiccant filter and dryer removes moisture and water vapor. Changes color to indicate need of replacement or recharge. Output screen protects tools from desiccant particles. Clear body allows for viewing of fluid levels. Metal encasement prevents impact damage. Can be wall mounted.

Mfg. No.	Order No.	Max. PSI
PA208503AV	CAMPA2085	150

Desiccant Refills



Replacement desiccant for model CAMPA2085 dryer. Desiccant changes color when it needs to be replaced.

Mfg. No.	Order No.	Desc.
PA2086	CAMPA2086	Desiccant Refill



Pressure Gauges Chrome-Plated



Designed with chrome plated case and glass lens. 1/4" Bottom mount.

Mfg. No.	Order No.	Pressure Range PSI	Dial Size In.	Accy %
GB14160-DL	CHP92128	0-160	2	3-2-3
GB14300-DL	CHP30278	0-300	2	3-2-3



Pressure Gauges Metal



Designed with metal case and polycarbonate lens. Includes 1/8" center back mount.

Mfg. No.	Order No.	Pressure Range PSI	Dial Size In.	Accy. %
26G-160-DL	CHP49296	0-160	1-1/2	3-2-3

Pressure Gauges Polycarbonate



Designed with polycarbonate case and lens. Includes 1/4" center back mount.

Mfg. No.	Order No.	Pressure Range PSI	Dial Size In.	Accy. %
8800-160-DL	CHP15063	0-160	2	3-2-3



CONSTRUCTION EQUIPMENT

Amflo

Quick-Disconnect Plugs Automotive Standard — Type C



AMFCP1

AMFCP2



AMFCP144L

Plated steel construction; mating surfaces are heat-treated for reduced wear. Interchangeable with other manufacturers. 300 PSI maximum working pressure.

Mfg. No.	Order No.	Desc.	Size In.
CP1-100	AMFCP1	Male	1/4
CP1-03	AMFCP103	Male	3/8
CP2-100	AMFCP2	Female	1/4
CP2-23	AMFCP223	Female	3/8
CP1-42L	AMFCP142L	Lock-on barb	1/4
CP1-44L	AMFCP144L	Lock-on barb	3/8

Quick-Disconnect Plugs Automotive Standard — Type G



AMFCP5

Plated steel construction, hardened to reduce wear on mating surfaces. 300 PSI maximum working pressure.

Mfg. No.	Order No.	Desc.
CP5-50	AMFCP5	3/8" NPT male
CP6-50	AMFCP6	3/8" NPT female
CP7-50	AMFCP7	1/4" NPT male
CP8-50	AMFCP8	1/4" NPT female
CP10	AMFCP10	1/2" NPT female

Air Hose Plugs 1/2" Automotive Standard



1/2" Automotive Standard Series Type "F". Plated steel couplers have hardened steel balls and stainless steel springs. Coupler plugs are heat treated to reduce wear on critical mating surfaces. Maximum working pressure 300 PSI.

Mfg. No.	Order No.	Desc.
CP9-03	AMFCP903	3/8" NPT male

Amflo

Quick-Disconnect Couplers Automotive Standard — Type C



AMFC1

AMFC2




AMFC242L

Plated steel construction with hardened steel balls and stainless steel springs. Interchangeable with other manufacturers. 300 PSI maximum working pressure.

Mfg. No.	Order No.	Desc.	Size In.
C1-100	AMFC1	Male	1/4
C1-03	AMFC103	Male	3/8
C2-100	AMFC2	Female	1/4
C2-23	AMFC223	Female	3/8
C2-42L	AMFC242L	Lock-on barb	1/4
C2-44L	AMFC244L	Lock-on barb	3/8

Quick-Disconnect Couplers Automotive Standard — Type G



AMFC5



AMFC6



AMFC8

Plated steel construction with hardened steel balls and stainless steel springs. 300 PSI maximum working pressure.

Mfg. No.	Order No.	Desc.
C5	AMFC5	3/8" NPT male
C6-50	AMFC6	3/8" NPT female
C7-50	AMFC7	1/4" male
C8-50	AMFC8	1/4" male

**COILHOSE
PNEUMATICS**

Quick-Connects Universal



All brass body and sleeve construction with four hardened steel locking balls, stainless steel valve and sleeve springs, and nitrile (Buna-N) seals and O-rings. Fits automotive and industrial interchange plugs.

Mfg. No.	Order No.	Type	Thread Size In.
150U-DL	CHP22388	Female	1/4

Universal Couplers Male



Features an all brass body and sleeve construction: four hardened steel locking balls, stainless steel valve and sleeve springs. Works with 1/4" automotive and industrial interchange plugs. 1/4" Male NPT.

Mfg. No.	Order No.	Size In.
152U-DL	CHP22371	1/4

Amflo

Quick-Disconnect Couplers Industrial Interchange — Type D



AMFC20

AMFC21

Plated steel construction with hardened steel balls and stainless steel springs. Interchangeable with other manufacturers. 300 PSI maximum working pressure. 1/4" NPT inlet.

Mfg. No.	Order No.	Desc.
C20-100	AMFC20	Female
C21-100	AMFC21	Male

Quick-Disconnect Plugs Industrial Interchange — Type D



AMFCP20

AMFCP21

Plated steel construction; heat-treated for reduced wear. Interchangeable with other manufacturers. 300 PSI maximum working pressure. 1/4" NPT inlet.

Mfg. No.	Order No.	Desc.
CP20-100	AMFCP20	Female
CP21-100	AMFCP21	Male

www.aih.com

AIH ORDER DESK 907.276.7201 • 1-800-478-7201



**ALASKA INDUSTRIAL
HARDWARE**
A BSNC
COMPANY

CONSTRUCTION EQUIPMENT

Amflo

Air Hose Couplers 1/2" Industrial Interchange



Steel construction. Max. 300 PSI. **Note: For compressed air lines only.**

Mfg. No.	Order No.	Desc.
C9-50	AMFC9	1/2" NPT male
C10-50	AMFC10	1/2" NPT female

Air Hose Splicers Lock-On Barb — Male



For use with Amflo lock-on hoses. No ferrules or clamps needed. 10 fittings per pkg. **Note: Not for use with conventional hoses.**

Mfg. No.	Order No.	For Hose ID In.	Conn. In. NPT
406L	AMF406L	3/8	1/4

COILHOSE PNEUMATICS

Filter Connectors 1/4" Body Size — Type 16



Male connectors for use with Automotive Tru-Flate® interchange designs.

Mfg. No.	Order No.	Thread/Barb Size In.
1601LF-DL	CHP11854	1/4
1603LF-DL	CHP11814	3/8

Air Line Connectors Swivel Plug



Ball swivel automotive connectors combine ball swivel fittings and connectors. Ergonomic and lightweight tool-to-hose connection. Connection nut portion is nickel plated hardened steel and threaded portion is all brass.

Mfg. No.	Order No.	Dia. In.	Connector & Hose
16-04BS-DL	CHP92236	1/4	

COILHOSE PNEUMATICS

Orbital Swivel Fittings 360°



360° swivel fitting to maneuver air tools. Reduces fatigue and injury. Brass construction and nickel plated for durability and corrosion resistance.

Mfg. No.	Order No.	Conn. In. MPT x FPT
LMF0404S-DL	CHP0404	1/4 x 1/4

Air Hose Ends Flexeel® — Reusable



Used to create a new or fix a damaged polyurethane hose. Removable and reusable.

Mfg. No.	Order No.	Tube Dia. In.	Fitting
PRM0404-DL	CHP10089	1/4	1/4" rigid male
PRM0604-DL	CHP90199	3/8	1/4" rigid male

Air Hose Splicers



Reusable splicer for polyurethane air hoses.

Mfg. No.	Order No.	ID In.	OD In.
PHS0609-DL	CHP92337	3/8	9/16

Air Hose Splicers Flexeel®



Splice damaged polyurethane hose. Removable and reusable.

Mfg. No.	Order No.	ID In.	OD In.
PHS0406-DL	CHP92806	1/4	3/8

Air Hose Splicer Kits




Brass construction. Can be used with FLEXEEL, nitrile, rubber and thermoplastic hoses. Includes splicer barb and two clamps.

Mfg. No.	Order No.	Barb Dia. In.
RK06	CHP22529	1/4

COILHOSE PNEUMATICS

Conversion Fittings Swivel



Solid brass construction. For use with nitrile or rubber hose.

Mfg. No.	Order No.	Conn. In. NPT
CF0404S-BAG	CHP21761	Female Male 1/4 1/4

3 Way Manifold Assemblies Flat Hex



Designed to lie flat on the floor, safely distributing three hose lines to the work area. Assembled with six ball automotive or industrial interchange couplers. Includes one hex manifold, one 1/4" connector and three 1/4" six ball couplers.

Mfg. No.	Order No.	Desc.
3122-16X-DPB	CHP92081	Manifold Assembly

Manifolds Multiple Connection — Tri-Pod



Used for high volume applications. Features three 1/4" FPT outlets and 3/8" inlet. Aluminum construction.

Mfg. No.	Order No.	Desc.
3003-BAG	CHP92306	3 Port (3/8" Inlet)

Tee Fittings Brass



For use with brass, copper or iron pipe.

Mfg. No.	Order No.	Conn. In. FPT
T004-BAG	CHP11090	1/4
T006-BAG	CHP11091	3/8

CONSTRUCTION EQUIPMENT



Cross Fittings Brass



For use with brass, copper or iron pipe.

Mfg. No.	Order No.	Conn. In. FPT
X004-BAG	CHP11092	1/4


Hex Couplings Brass



For use with brass, copper or iron pipe.

Mfg. No.	Order No.	Conn. In. FPT
K0404-BAG	CHP11086	1/4


Hex Bushing Brass



For use with brass, copper or iron pipe.

Mfg. No.	Order No.	Conn. In.	
		FPT	MPT
C0402-BAG	CHP19476	1/4	1/8
C0604-BAG	CHP19490	3/8	1/4

Hex Nipples Brass



For use with brass, copper or iron pipe.

Mfg. No.	Order No.	Conn. In. MPT
H0404-BAG	CHP11084	1/4
H0606-BAG	CHP11085	3/8
H0808-BAG	CHP19785	1/2

Hex Reducer Nipples Brass



For use with brass, copper or iron pipe.

Mfg. No.	Order No.	Conn. In. MPT
H0402-BAG	CHP19749	1/4 x 1/8
H0604-BAG	CHP19763	3/8 x 1/4



Hex Reducer Bushings Brass



For use with brass, copper or iron pipe.

Mfg. No.	Order No.	Conn. In.	
		MPT	FPT
B20402-BAG	CHP19326	1/4	1/8
B20604-BAG	CHP11097	3/8	1/4
B20804-BAG	CHP19341	1/2	1/4
B20806-BAG	CHP11098	1/2	3/8
B21208-BAG	CHP19354	3/4	1/2

Pressure Relief Valves Air Compressor



HelpS ensure safe operation of compressor systems by guarding against tank over pressure. Machined from brass bar stock; silicon rubber soft seal to ensure a tight, leak-free seal, manual pull ring allows for testing and system pressure relief. 1/4" NPT thread. ASME approved

Mfg. No.	Order No.	Max PSI	Desc.
SV165	CHP93421	165	Tank Relief Valve

Pressure Relief Valves Air Compressor



Protects compressor tanks quickly releasing excess pressure. Manual pull ring allows for teasing and system pressure relief. Each valve is marked with the relief pressure.

Mfg. No.	Order No.	Max PSI
SV200	CHP1464	200



Tank Air Valves



Replacement for most 1/8" NPT carry tank fill valves.

Mfg. No.	Order No.	NPT In.
MP3229	CAMMP3229	1/8



Drain Cocks Brass



Solid brass fitting.

Mfg. No.	Order No.	Flow Passage In.	Conn. In. NPT
931	AMF931	1/16	1/8



Air Line Antifreeze



AIHALAFQT

AIHALF1

Recommended for all below freezing compressor applications; high quality air line de-icer, removes all moisture and ice from air lines.

Mfg. No.	Order No.	Size
NO TOX	AIHALAFQT	Quart
NO TOX	AIHALAF1	Gallon



Air Tool Oils



Light oil for pneumatic tools. 92 SUS at 75°F.

Mfg. No.	Order No.	Size
1220-1	AMF12201	1 pint
1220-8	AMF12208	1 gallon

CONSTRUCTION EQUIPMENT



Air Tool Oils Synthetic Blend



Synthetic-blend all-weather oil for your air tools. Temperature range of -17° C to 49° C.

Mfg. No.	Order No.	Size Oz.
OILTOOL16C	ROA00976	16



Air Tool Oils



Mix of lubricant and Stoddard solvent extends air tool life.

Mfg. No.	Order No.	Size Oz.
ST1270	CAMST1270	8

Air Compressor Oils



Reduces carbon build-up in single-stage compressors. Non-detergent, 30-weight, single viscosity.

Mfg. No.	Order No.	Size Oz.
ST125312AV	CAMST1253	16



Air Compressor Oils Synthetic



Synthetic compressor oil by DeWalt.

Mfg. No.	Order No.	Size Qt.
D55001	DWTD55001	1



Air Compressors Oil Free — Hand Carry



Features .3 continuous HP, direct drive motor with 1 gal tank. .6 CFM at 100 PSI. Measures 19" L x 14.5" W x 9" H.

Mfg. No.	Order No.	CFM @ 100 PSI	HP	Volts	Tank Size Gal.
D55140	DWTD55140	.6	.3	115	1



Air Compressors Oil Free — Hand Carry



Use for inflation, brad nailing, stapling, and air brushing. Tank eliminates the pulsations. Gauges allow monitoring of pressure. Kit includes 25' recoil hose, blow gun, female coupler, 2-inflation needles, two male plugs, air chuck, inflation adapter, tapered inflation nozzle, and PTFE tape.

Mfg. No.	Order No.	PSI	Tank Size Gal.
FP209499	CAM209499	110	3



Air Compressors Oil-Lubricated



Oil lubricated CAST IRON cylinder compressor pump for long lasting and reliable performance. The 1-1/3 running HP motor combined with the Campbell Hausfeld pump stands for high quality.

Mfg. No.	Order No.	Gal. Size.
HL5402	CAMHL5402	4



Air Compressors Oil Free — Hand Carry



Electric, hand carry, ultra quiet, direct drive compressor. Features aluminum cylinder, and lubeless pump. Equipped with regulator, pressure gauges, 1/4" universal coupler and air filter. Lightweight at only 20 lbs.

Mfg. No.	Order No.	CFM @ 100 PSI	HP	Volts	Tank Size Gal.
PC1010	SENPC1010	.6	1	115	1



Air Compressors Gas — Hand Carry



Single stage, oilless, two cylinder, low-amp draw. Heavy duty, industrial grade. Start/stop pressure switch, roll-cage design, safety relief valve, intake filter/silencer, pressure relief solenoid valve, air line regulator and pressure gauge.

Mfg. No.	Order No.	CFM @ 90PSI	HP	Volts	Tank Size Gal.
JC10	ROAJC10	2.3	1	115	2.5



CONSTRUCTION EQUIPMENT



Wheeled Air Compressors Gas — Hand Carry



Single stage, cast-iron cylinder pump with ball bearings, stainless-steel reed valves and splash lubrication. Overload protection, manual reset, low-amp draw. Heavy duty wheels for mobility, start/stop pressure switch with on/off lever, fold down handle, control panel with gauges, two quick-disconnects, safety relief valve and silencer. Initial 10-oz. oil fill included.

Mfg. No.	Order No.	CFM @ 90PSI	HP	Volts	Tank Size Gal.
VT25BIG-0193	ROAVT25BIG	6.5	2.5	115	5.3

Air Compressors Hand Carry-Electric



100% duty-cycle motor has reduced operating noise due to its low speed motor. Motor has overload protection with reset and heavy duty, industrial grade ball bearings for durability. Start/stop switch with on/off lever. Stack-tank design with user-friendly control panel that includes gauges. 1/4" universal quick-disconnect, safety relief valve and intake filter silencer.

Mfg. No.	Order No.	Gal. Cap.
VT20ST-0193	ROAVT20ST	4.2



Air Compressors Wheeled



Oil free, maintenance free pump. Space-saving vertical stand feature and collapsible handle, vertical transport and storage. 200 PSI max. tank storage pressure. 10" non-flat foam tires for easy transportation. 78 dBA operational noise level.

Mfg. No.	Order No.	CFM @ 90 PSI	HP	Volts	Tank Cap. Gal.
D55146	DWTD55146	5.2	1.8	115	4-1/2



Air Compressors Electric — Wheeled



ROA5715K17



ROA6820K17

Heavy duty, single-stage motor with cast iron twin cylinders, ball bearings, splash-lubrication. Open motor, drip-proof, ball bearings, overload protection/manual reset. Includes pressure gauge, 0-200 in 5 lb. graduations, air-cooled aftercooler, enclosed steel belt guard.

Mfg. No.	Order No.	CFM @ 100 PSI	HP	Volts	Tank Size Gal.
5715K17-0191	ROA5715K17	6.9	1.5	115/230	9
6820K17-0213	ROA6820K17	8.4	2	115/230	20

Air Compressors Electric-Wheeled



Twin tank, 2-stage motor, 230V portable compressor. Enbloc cast-iron cylinders.

Mfg. No.	Order No.	Tank Cap. Gal.
5230K30CS-0202	ROA5230K30	9



Air Compressors Gas — Wheeled



Heavy duty, two-stage pump with cast iron twin cylinders, ball bearings, splash lubrication, multi-finned 11" flywheel and oil sight gauge. Honda four-cycle motor, die cast aluminum alloy with cast iron sleeve. Includes pressure gauge, 0-200 in. automatic idle control, air-cooled aftercooler, enclosed steel belt guard and safety relief valve.

Mfg. No.	Order No.	CFM @ 100 psi	HP	Tank Size Gal.
4090HK17-0190	ROA4090HK	8.9	5.5	9
7722HK28-0190	ROA7722HK	16.2	9	9



Air Compressors Electric — Wheeled



Oil-free pump is maintenance free. Integrated control panel for couplers and pressure control knob access with highly visible gauges. Rugged roll cage with multiple grip points. Telescoping handle and integrated wheels.

Mfg. No.	Order No.	Max PSI	Dim. In. H x L x W	SCFM @ 90PSI
PC0969	SENPC0969	200	17 x 18 x 27	4.9

CONSTRUCTION EQUIPMENT

PORTER CABLE

Air Compressors Combo Kit



6-gal. Portable Electric Air Compressor. Designed to operate at or below 150 psi and also features an oil-free pump and a 25 ft. Air Hose. Also includes: FN250C: 16-gauge 2-1/2 in. Finish Nailer, BN200C: 18-gauge 2 in. Brad Nailer.

Mfg. No.	Order No.	SCFM @ 90PSI.	Volts	Tank Size Gal.
PCFP12656	PRT29817	2.6	120	6

CAMPBELL HAUSFELD

Air Compressors Two Stage — Electric



115-volt, durable construction featuring oil lubricated belt drive and cast-iron twin cylinder pumps for extended performance. Includes level sight glass for easy monitoring and maintenance. Includes 10-inch semi-pneumatic wheels.

Mfg. No.	Order No.	CFM @ 90 PSI	HP	Volts	Tank Size Gal.
VT6358	CAMVT6358	5.5	2	120	30

DEWALT

Electric Compressors EHP™ — Wheeled



Oil-free, maintenance-free pump for convenient use. 200 PSI max tank storage pressure allows for longer air tool run times. Compact design for easy transportation and storage. Wide track, semi-pneumatic tires allow for additional stability, easy movement, and no tire maintenance. Measures 22" L x 44.75" W x 24.5" H.

Mfg. No.	Order No.	CFM @ 100 PSI	HP	Volts	Tank Size Gal.
D55168	DWTD55168	5	1.6	115	15

DEWALT

Air Compressors Two Stage — Electric



5 HP, 230V, 1-Phase electric motor with thermal overload protection, asymmetrical deep groove cooling fins, and cast iron fly wheel. Includes integrated control panel with easy access to pressure regulator and 2 quick-connect air outlets.

Mfg. No.	Order No.	CFM @ 100 PSI	HP	Volts	Tank Size Gal.
DXCMV5048055	DWT5048055	17.9	5	230	80

IR Ingersoll Rand

Air Compressors Gas — Two Stage



Electronic ignition, idle engine control, 30 gal. ASME receiver, truck bed mounting and fully enclosed belt guard. Cast iron construction with weather-resistant, powder-coat paint finish.

Mfg. No.	Order No.	CFM @ 175 PSI	HP	Tank Size Gal.
45466067	IRA2475F13	25	13	30

Air Compressor Start-Up Kit

Mfg. No.	Order No.	Desc.
32312936	IRA12933	Lubricant, filter elements, engine oil & air filters

DEWALT

Air Compressors Electric — Vertical



Cast iron, twin cylinder, oil lubricated pump. HD, 240V induction motor for max performance and efficiency. Large capacity, 60gal ASME* air receiver provides more air for longer run times on air tools. Equipped with pressure gauge and on/off switch

Mfg. No.	Order No.	CFM @ 90 PSI	HP	Volts	Tank Size Gal.
DXCMLA3706056	DWT3706056	11.5	3.7	240	60

IR Ingersoll Rand

Air Compressors Electric — Single Stage



Single-phase, electric pump. High capacity compressor with 60 gallon cast iron vertical tank. 100% continuous duty cycle. Efficient finger valves that are easy to maintain. OSHA compliant.

Mfg. No.	Order No.	CFM @ 90 PSI	HP	Volts	Tank Size Gal.
32334005	IRASS3L3	10.3	3	230	60

Air Compressor Start-Up Kit Unit SS3L3

Mfg. No.	Order No.	Desc.
97338099	IRA38099	Start-up kit for SS3L3 compressor

Air Compressors Electric — Two Stage



For automotive, heavy duty commercial or industrial applications. Includes magnetic motor starter, air-cooled aftercooler, low oil level shutdown switch and electric drain valve to remove harmful moisture. Max. 175 PSI.

Mfg. No.	Order No.	CFM @ 175 PSI	HP	Volts	Tank Size Gal.
45465523	IRA2475N75	24	7.5	230	80

CONSTRUCTION EQUIPMENT

PORTER CABLE

Air Compressors Combo Kit



6-gal. Portable Electric Air Compressor. Designed to operate at or below 150 psi and also features an oil-free pump and a 25 ft. Air Hose. Also includes: FN250C: 16-gauge 2-1/2 in. Finish Nailer, BN200C: 18-gauge 2 in. Brad Nailer.

Mfg. No.	Order No.	SCFM @ 90PSI.	Volts	Tank Size Gal.
PCFP12656	PRT29817	2.6	120	6

CAMPBELL HAUSFELD

Air Compressors Two Stage — Electric



115-volt, durable construction featuring oil lubricated belt drive and cast-iron twin cylinder pumps for extended performance. Includes level sight glass for easy monitoring and maintenance. Includes 10-inch semi-pneumatic wheels.

Mfg. No.	Order No.	CFM @ 90 PSI	HP	Volts	Tank Size Gal.
VT6358	CAMVT6358	5.5	2	120	30

DEWALT

Electric Compressors EHP™ — Wheeled



Oil-free, maintenance-free pump for convenient use. 200 PSI max tank storage pressure allows for longer air tool run times. Compact design for easy transportation and storage. Wide track, semi-pneumatic tires allow for additional stability, easy movement, and no tire maintenance. Measures 22" L x 44.75" W x 24.5" H.

Mfg. No.	Order No.	CFM @ 100 PSI	HP	Volts	Tank Size Gal.
D55168	DWTD55168	5	1.6	115	15

DEWALT

Air Compressors Two Stage — Electric



5 HP, 230V, 1-Phase electric motor with thermal overload protection, asymmetrical deep groove cooling fins, and cast iron fly wheel. Includes integrated control panel with easy access to pressure regulator and 2 quick-connect air outlets.

Mfg. No.	Order No.	CFM @ 100 PSI	HP	Volts	Tank Size Gal.
DXCMV5048055	DWT5048055	17.9	5	230	80

IR Ingersoll Rand

Air Compressors Gas — Two Stage



Electronic ignition, idle engine control, 30 gal. ASME receiver, truck bed mounting and fully enclosed belt guard. Cast iron construction with weather-resistant, powder-coat paint finish.

Mfg. No.	Order No.	CFM @ 175 PSI	HP	Tank Size Gal.
45466067	IRA2475F13	25	13	30

Air Compressor Start-Up Kit

Mfg. No.	Order No.	Desc.
32312936	IRA12933	Lubricant, filter elements, engine oil & air filters

DEWALT

Air Compressors Electric — Vertical



Cast iron, twin cylinder, oil lubricated pump. HD, 240V induction motor for max performance and efficiency. Large capacity, 60gal ASME* air receiver provides more air for longer run times on air tools. Equipped with pressure gauge and on/off switch

Mfg. No.	Order No.	CFM @ 90 PSI	HP	Volts	Tank Size Gal.
DXCMLA3706056	DWT3706056	11.5	3.7	240	60

IR Ingersoll Rand

Air Compressors Electric — Single Stage



Single-phase, electric pump. High capacity compressor with 60 gallon cast iron vertical tank. 100% continuous duty cycle. Efficient finger valves that are easy to maintain. OSHA compliant.

Mfg. No.	Order No.	CFM @ 90 PSI	HP	Volts	Tank Size Gal.
32334005	IRASS3L3	10.3	3	230	60

Air Compressor Start-Up Kit Unit SS3L3

Mfg. No.	Order No.	Desc.
97338099	IRA38099	Start-up kit for SS3L3 compressor

Air Compressors Electric — Two Stage



For automotive, heavy duty commercial or industrial applications. Includes magnetic motor starter, air-cooled aftercooler, low oil level shutdown switch and electric drain valve to remove harmful moisture. Max. 175 PSI.

Mfg. No.	Order No.	CFM @ 175 PSI	HP	Volts	Tank Size Gal.
45465523	IRA2475N75	24	7.5	230	80



CONSTRUCTION EQUIPMENT



Framing Nailers Pneumatic



Full Round Head nailer is designed with improved internal and external features for durability and comfort, and enough power to drive the wide range of full round head nails, even common nails and an in-line magazine.

Mfg. No.	Order No.	Desc.
2F0103N	SENSN752XP	60

Joist Hanger Nailers Pneumatic



A compact metal connector nailer than can drive up to 2-1/2" nails. Its nosepiece designs provide accurate nail placement into pre-punches metal connector holes. Constructed with durable, high-quality materials.

Mfg. No.	Order No.	CAP. IN.
6K0001N/JP250XP	SENJP250	2-1/2



Framing Nailers Lithium-Ion-Cordless XP



Light weight 7.2 lbs. including battery for better comfort and control overhead and in tight spaces, 15% added power that drives nails flush, even in LVL and the old harder woods re-modelers encounter.

Mfg. No.	Order No.	Battery Type
905600	PAS905600	7.4V Li-Ion



Pneumatic Coil Nailers Roofing



Side-loading magazine. Tool-less depth of drive adjustment. Carbide tipped push lever reduces wear. Rubber pads keep nailer from sliding. Rubber grip for added comfort.

Mfg. No.	Order No.	Mag. Cap.	Nail Lgth. In.	Nail Dia. In.
NV45AB2	HTNNV45AB2	120	7/8 - 1-3/4	.120



Pneumatic Joist Hanger Nailers 34 Degree — Metal Connector



Fires single strip of 1-1/2" paper tape collated nails ranging from .131" to .148" in diameter. Innovative nosepiece for accurate nail placement into pre-punched metal connector holes, TOOL FREE 360° adjustable exhaust and an adjustable rafter hanger. 70 - 120 operating PSI. Dry fire lockout prevents blank driving.

Mfg. No.	Order No.	Mag. Cap.	Nail Lgth. In.
7L0001N/JP150	SENJP150	30	1-1/2



Pneumatic Joist Hanger Nailers Strap-Tite™



Lightweight for maneuverability. Narrow design for ease of use in tight spaces. Sequential firing mechanism ensures precision nail placement. Dry-fire lockout.

Mfg. No.	Order No.	Nail Lgth. In.	Nail Dia. In.
NR65AK2	HTNNR65AK2	1-1/2 - 2-1/2	.131 - .162



Pneumatic Staplers 15 Ga. — 7/16" — Standard Crown



Heavy wire stapler shoots up to 15 staples per second, has adjustable depth of drive, adjustable power for softer drives, EZ-Clear latch provides quick and easy clearing of occasional jams. Adjustable exhaust directs exhaust air in any direction.

Mfg. No.	Order No.	Mag. Cap.	Lgth. In.
660101N/SQS55XP	SENSQS55XP	130	1-1/4 - 2-1/2



Pneumatic Staplers 16Ga. — 15/16" — Wide Crown



Extend Bumper Life, tested to over 600,000 cycles. Lightweight and Well-Balanced which reduces operator fatigue and increases productivity. The Quick Clear Nose clear jams quickly and easily without additional tools. It can drive staples up to 2" in length for a variety of applications and has a Top Load Magazine for loading ease, reduced fastener waste

Mfg. No.	Order No.	Staple Size In.
501265	PAS501265	3/4 to 2

Pneumatic Staplers 16 Ga. — 1/2" — Standard Crown



Great for floor decking, roof or plywood sheathing and insulation. Versatile and durable. Top load magazine for easy reload and reduced nail waste.

Mfg. No.	Order No.	Mag. Cap.	Lgth. In.
501230/S200-S16	PAS501230	150	3/4 - 2



CONSTRUCTION EQUIPMENT



Pneumatic Staplers



Lightweight, compact design for versatility and precision. Contact safety mechanism for safe firing. Comfort grip for extended use. Adjustable exhaust cover directs air away from user. Easy-load magazine. Bump fire capability for fast firing. Uses T-50 staples.

Mfg. No.	Order No.	PSI	Staple Size In.
PT50	AROPT50	120	9/16



Pneumatic Staplers 16/17 Ga. - 7/16 Crown



Machined drive track ensures accurate, jam-free staple drives. Sheathing, Furniture Framing, Sub-flooring, Roof Decking, Crate & Box Assembly.

Mfg. No.	Order No.	Mag. Cap.
7B0001N	SENSNS200	160



Pneumatic Stapler Kits 18 Ga. — 1/4" — Narrow Crown



Tool-free depth-of-drive adjustment with detents for setting of staples. Split nose design for easy removal of jammed staples. Restrictive or contact actuation mode. Removable non-marring nose tip with on tool storage. Adjustable belt hook. Integrated rubber grip for comfort. Low staple reload indicator.

Mfg. No.	Order No.	Mag. Cap.	Lgth. In.
NT150C	PRTNS150C	100	1/2 - 1-1/2



Pneumatic Brad Nailers 16 Ga. — FinishPro® 32



Ultra-light magnesium main body. Selectable actuation trigger, adjustable depth of drive, EZ-Clear latch, 360° adjustable rear exhaust, comfort grip, belt hook, and no-mar pad. Includes case.

Mfg. No.	Order No.	Mag. Cap.	Nail Lgth. In.
1X0201N	SENPRO32	110	1-1/4 - 2-1/2

Pneumatic Angled Finish Nailers 15 Ga. — FinishPro® — 34 Degree



Lightweight magnesium body. Sequential actuation trigger, adjustable depth of drive, EZ-Clear latch, 360° adjustable rear exhaust, comfort grip and belt hook, and no-mar pad. Includes case.

Mfg. No.	Order No.	Mag. Cap.	Nail Lgth. In.
4G0001N	SEN42XP	104	1-1/4 - 2-1/2



Pneumatic Finish Nailers 16 Ga.



Lightweight and well balanced, reduces fatigue and increases productivity. Depth of drive adjustment. Precise control of nail depth in hard or soft wood. No wrenches needed. Selectable fire trigger changes between bump and sequential modes.

Mfg. No.	Order No.	Mag. Cap.	Nail Lgth. In.
501680	PAS501680	100	3/4 - 2-1/2



Cordless Angled Finish Nailers 16 Ga.



Light weight, ergonomic design makes nailing easy and efficient. Quickload™ fuel system is easy to install. Includes heavy duty rafter and belt hook for durability.

Mfg. No.	Order No.	Mag. Cap.	Nail Lgth. In.
902400	PAS902400	1200	1-1/4 - 2-1/2



Cordless Nailer 20V MAX* — 16 Ga.



The 20V MAX* brushless 16 gauge angled cordless finish nailer drives 16 gauge 20-degree angled finish nails from 1-1/4" to 2-1/2". Sequential mode for precision placement and bump mode for production speed. Tool-free jam release to quickly and easily clear nail jams

Mfg. No.	Order No.	Mag Cap	Nail Lgth. In.	Nail Gauge
DCN660B	DWTDCN660B	110	1-1/4 to 2-1/2	16



Pneumatic Finish Nailers 18 Ga.



No mar tip. Slender, long-nose design for tight spots and precise nailing. Depth of drive adjustment controls nail setting depth. Soft grip reduces fatigue. Includes case.

Mfg. No.	Order No.	Mag. Cap.	Nail Lgth. In.
500959/T200-F18	PAS500959	100	5/8 - 2

CONSTRUCTION EQUIPMENT



Pneumatic Brad Nailers 18 Ga. — FinishPro® 18MG



Ultra-light magnesium body. Regular operating pressure 70-120 psi with 2.4 SCFM air consumption. Oil free design. Selectable actuation trigger, adjustable depth of drive, rotatable rear exhaust, over-mold rubber grip, belt hook, and swivel air plug. Includes case and wrench.

Mfg. No.	Order No.	Mag. Cap.	Nail Lgth. In.
1U0021N	SENPRO18MG	110	5/8 – 1-5/8

PORTER CABLE

Micro Pin Nailers 23 Ga.



Rear exhaust. Dry-fire lock out. Narrow nose design with removable nose tip and on tool storage. Auto-adjusts for fastener lengths. Side-load magazine, reversible belt clip, dual trigger, and integrated rubber grip. Includes 2,000 3/4" nails, 1/4" air fitting with dust cover, wrench, and carry case.

Mfg. No.	Order No.	Mag. Cap.	Nail Lgth. In.
PIN138	PRTPIN138	130	5/8 – 1-3/8



Micro Pin Nailers 23 Ga.



Industrial strength headless pin nailer. Adjusts for fastener lengths. Reversible belt hook. Rear exhaust. Last nail lockout prevents dry-firing. Ultra narrow nose for access to mill work and tight corners.

Mfg. No.	Order No.	Mag. Cap.	Nail Lgth. In.
23SXP	SEN23SXP	100	1/2 – 1-3/8



Brad Nailers 18V Fuel-Cordless



Dry-fire lockout, LED work light, Adjustable belt hook. TOOL ONLY

Mfg. No.	Order No.	Nail Dia.
2740-20	MIL2740-20	18 Gauge

Angled Finish Nailers 20 Degree




Can drive 800 nails per 2.0Ah battery charge. Sequential and contact actuation modes, Dry-Fire lockout.

Mfg. No.	Order No.	Nail Size In.
2742-20	MIL2742-20	1-1/4 – 2-1/2



Nailgun Hangers I Joist



Solid steel construction with zinc plating. Spring loaded and retractable. Wider hook hangs on floor joists up to 2-1/4" wide. For Hitachi(NR83A2, NR83AA2, NR90AC2), Stanley Bostich(N88RH-1) and Porter-Cable (FR350) nailers.

Mfg. No.	Order No.	Desc.
70306	THU70306	I Joist nailgun hanger



Battery Packs Lithium-Ion — Cordless Nailers



For Paslode Lithium-Ion fuel powered nailers. Drives 6000 nails per fully charged battery. Charges in 60 minutes or less.

Mfg. No.	Order No.	Desc.
902654	PAS902654	Li-Ion Battery for cordless nailers

Rechargeable Batteries Oval-Type



For use with newer cordless nailers that require oval batteries. For use with Paslode® Impulse compact series.

Mfg. No.	Order No.	Desc.
404717	PAS404717	Rechargeable oval battery

Rechargeable Batteries Stick-Type



For use with older cordless nailers that require tall stick batteries. For use with Paslode® Impulse series.

Mfg. No.	Order No.	Desc.
402500	PAS402500	Rechargeable stick battery

Battery Chargers



For all Paslode® rechargeable batteries. Three-hour fast charger.

Mfg. No.	Order No.	Desc.
900200	PAS900200	Rechargeable stick battery



CONSTRUCTION EQUIPMENT



Battery Chargers Lithium-Ion — Cordless Nailers



For Paslode Lithium-Ion battery (902654). 2x faster charge time. 2-minute quick charge will drive up to 200 nails.

Mfg. No.	Order No.	Charge Time Min.
902667	PAS902667	60 or less

Cleaner/Degreasers



For use on cordless and pneumatic tools. Aerosol.

Mfg. No.	Order No.	Size Oz.
219348	PAS219348	12

Lubricating Oils



Conditions and lubricates your Paslode cordless tools for consistent tool performance. For use in temperatures above 32°F.

Mfg. No.	Order No.	Size Oz.
401482	PAS401482	4

Fuel Cells



Quicklode™ universal trim fuel for premium grade, precise fuel doses and reliable drive performance. Works with all Paslode cordless finish nailers. Includes two twist on external metering valve adapters.

Mfg. No.	Order No.	Size Oz.	Color
816007	PAS816007	.53	Yellow



Fuel Cells



For cordless framing nailers. Two-pack.

Mfg. No.	Order No.	Size Oz.	Color
816000	PAS816000	1.32	Red

Fuel Cells



Framing nailer fuel cartridge for CF325 cordless nailer. Quicklode™ design for easy installation. Orange.

Mfg. No.	Order No.	For Model
816005	PAS816008	CF325



Pneumatic Nailers Palm



Compact & powerful enough to drive 2" - 3½" bulk nails. Small size for accessibility. Ultra-light at just 1 lbs. Magnetic Nose holds nail in place for safe, accurate placement. Nail point can be easily placed within a recess for safe, efficient fastening.

Mfg. No.	Order No.	Mag. Cap.	Max PSI
PC1195	SENPC1195	1	110

Floor Cleat Nailers Pneumatic



Professional-grade hardwood flooring cleat nailer provides consistent driving power for flush, professional-quality installation. L-shaped cleats hold the wood securely, while allowing for expansion and contraction. Long, ergonomically designed handle minimizes user fatigue.

Mfg. No.	Order No.	Mag. Cap.	Lgth. In.
SHF200	SENSHF200	107	1-1/2 - 2



Pneumatic Micro Pin Nails 23Ga. — Straight Strip



Features galvanized finish with a plain coating. Headless pins. Great for mouldings picture frame assembly trim and cabinetry finishing. Virtually no holes.

Mfg. No.	Order No.	Lgth. In.	Pkg. Qty.
A100629	SEN70007	5/8	2600
A101009	SEN70009	1	2600
A101379	SEN05855	1-3/8	2600

Pneumatic Finish Nails Straight



For straight finish nailers. Galvanized finish with chisel point to reduce wood splitting.

Mfg. No.	Order No.	Lgth. In.	Pkg. Qty.
	18 Ga.		
650212	PAS650212	1	2000
650213	PAS650213	1-1/4	2000
650214	PAS650214	1-1/2	2000
650215	PAS650215	2	2000
	16 Ga.		
650282	PAS650282	1-1/4	2000
650283	PAS650283	1-1/2	2000
650284	PAS650284	1-3/4	2000
650285	PAS650285	2	2000
650287	PAS650287	2-1/2	2000

Pneumatic Angled Finish Nails 16 Ga.



Great when toe nailing is needed. Galvanized finish with chisel point to reduce wood splitting.

Mfg. No.	Order No.	Lgth. In.	Pkg. Qty.
650230	PAS650230	1-1/4	2000
650231	PAS650231	1-1/2	2000
650047	PAS650047	2	2000
650232	PAS650232	2-1/2	2000

CONSTRUCTION EQUIPMENT



Pneumatic Framing Nails 20 Degree



Fits 20° full head nailers. Plastic collation.

Mfg. No.	Order No.	Lgth. In. x Dia. In.	Pkg. Qty.	Desc.
FAN238120EG	FAN50250	2-3/8 x .120	5000	EG Full Head
FAN238120R	FAN50200	2-3/8 x .120	5000	RS Vinyl Full Head
FAN238120HDG	FAN50151	2-3/8 x .120	5000	HDG Full Head
FAN212131	FAN50590	2-1/2 x .131	5000	SM Full Head
FAN212131HDG	FAN50598	2-1/2 x .131	5000	HDG Full Head
FAN3131EG	FAN50400	3 x .131	4000	SM EG Full Head
FAN3131	FAN50350	3 x .131	4000	SM Full Head
FAN3131HDG/C	FAN50354	3 x .131	4000	HDG Full Head
FAN3148	FAN50500	3 x .148	4000	SM Full Head
FAN314131EG	FAN50575	3-1/4 x .131	4000	SM EG Full Head
FAN314148HDG	FAN00584	3-1/4 x .148	4000	HDG Full Head
FAN312162	FAN50585	3-1/2 x .162	3000	SM Full Head



Pneumatic Angle Finish Nails 15 Ga. — 34 Degree



Features galvanized finish with chisel point. T-head style head. Great for furniture and woodworking.

Mfg. No.	Order No.	Lgth. in.	Pkg. Qty.
DA17EABN	SEN20074	1-1/2	4000
DA21EABN	SEN20082	2	4000
DA25EAB	SEN20234	2-1/2	3000



Pneumatic Framing Nails 30 Degree



Round offset head meets round head code requirements. Paper-tape collation eliminates debris. Fits most D-head nailers.

Mfg. No.	Order No.	Lgth. In. x Dia. In.	Desc.	Pkg. Qty.
650381	PAS650381	2 x .113	HDG Ring Shank	2000
650238	PAS650238	2-3/8 x .113	Brite Finish Ring Shank	5000
650382	PAS650382	2-3/8 x .113	HDG Smooth Shank	2000
650383	PAS650383	2-3/8 x .113	HDG Ring Shank	2000
405253	PAS405253	2-1/2 x .131	Brite Finish Smooth Shank	3000
650830	PAS650830	3 x .131	Brite Finish Smooth Shank	2500
650386	PAS650386	3 x .131	HDG Smooth Shank	2000
650385	PAS650385	3 x .120	HDG Ring Shank	2000
650839	PAS650839	3-1/4 x .131	Brite Finish Smooth Shank	2500
650388	PAS650388	3-1/4 x .131	HDG Smooth Shank	2000
97987	PAS97987	3-1/2 x .131	Brite Finish Smooth Shank	2500
650476	PAS650476	3-1/2 x .131	HDG "D" head Smooth Shank	2000

Pneumatic Joist Hanger Nails Positive Placement®




Heat-treated. Paper tape collation eliminates debris. Head markings for easy nail identification. Smooth shank.

Mfg. No.	Order No.	Desc.	Pkg. Qty.
650026	PAS650026	1-1/2 X .148	3000
650014	PAS650014	1-1/2 X .148 galv.	3000
650027	PAS650027	2-1/2 x .148	2500
650028	PAS650028	2-1/2 x .162	2000



Pneumatic Staples 14 Ga. — 1/2" — Standard Crown



Heavy guage electro galvanized staples. Titanium Series™.

Mfg. No.	Order No.	Lgth. In.	Pkg. Qty.
FANGS14200G	FAN20540	2	5000

Pneumatic Staples 14 Ga. — 7/16" — Standard Crown



Galvanized for corrosion protection.

Mfg. No.	Order No.	Lgth. In.	Pkg. Qty.
FANS21G	FAN20544	2	5000



Pneumatic Staples 16 Ga. — 1/2" — Standard Crown



Galvanized for corrosion protection. Extra strong and won't fall apart if dropped!

Mfg. No.	Order No.	Lgth. In.	Pkg. Qty.
OT5242	PAST5242	1	16,500
OT5238	PAST5238	1-1/4	13,500
OT2695	PAST2695	1-1/2	10,500
OT2250	PAST2250	1-3/4	9000
OT2258	PAST2258	2	7500



CONSTRUCTION EQUIPMENT



Pneumatic Staples 16 Ga. — 7/16" — Medium Crown




Electro galvanized stainless steel for corrosion protection. Titanium Series™.

Mfg. No.	Order No.	Staple Lgth. In.	Pkg. Qty.
FANN17G	FAN20100	1-1/2	10,000
FANN19G	FAN20200	1-3/4	10,000
FANN21G	FAN20300	2	10,000



Pneumatic Roofing Staples 16 Ga. — 15/16" — Wide Crown



Wider crown for superior holding power. Galvanized protection

Mfg. No.	Order No.	Lgth. In.	Pkg. Qty.
404069	PAS404069	7/8	9000



Pneumatic Staples 18 Ga. — 1/4" — Narrow Crown



Galvanized finish makes the staples resistant to rust and corrosion

Mfg. No.	Order No.	Lgth. In.	Pkg. Qty.
PNS18075	PRTNS18075	3/4	5000
PNS18100	PRTNS18100	1	5000
PNS18125	PRTNS18125	1-1/4	5000
PNS18150	PRTNS18150	1-1/2	5000




Pneumatic Brad Nails 18 Ga. — Straight



Features galvanized finish with chisel point. Medium sized head. Applications include molding and decorative trim, glazing strips and window beading, dowel and joint pinning, rattan furniture, and mirror and picture frame assembly.

Mfg. No.	Order No.	Lgth. in.	Pkg. Qty.
AX21EGAR	SEN10596	2	1000


DUO-FAST Flooring Cleat Nails



Mfg. No.	Order No.	Size In.	Pkg. Qty.
RW21BPE	SEN20423	2	1000



Pneumatic Coil Nails Roofing




Galvanized smooth shank. Use for asphalt and fiberglass shingles, wall sheathing and insulation.

Mfg. No.	Order No.	Lgth. In. x Dia. In.	Pkg. Qty.
FANCR2D	FAN40350	1 x .120	7200
FANCR3D	FAN40400	1-1/4 x .120	7200
FANCR4D	FAN40450	1-1/2 x .120	7200
FANCR5D	FAN40500	1-3/4 x .120	7200



Pneumatic Coil Nails Hardboard Siding



15° galvanized smooth shank. Use for siding, fencing & exterior trim. Fits most pneumatic nail guns. (Does not fit Paslode models).

Mfg. No.	Order No.	Lgth. In. x Dia. In.	Pkg. Qty.	Desc.
FANAC7DREG36	FAN40016	2-3/16 x .092	3600	EG Ring Shank HD galv.
FANAC7DHDG36	FAN02111	2-3/16 x .092	3600	



Cement Mixers



Powerful 8 HP Honda GX240 engine. High abrasion resistant steel construction. Heavy duty retractable tow bar. Axle springs for less bounce and sway during transport.

Mfg. No.	Order No.	Cap. Cu. Ft.
MC95SH240	BMIMC95SH	9.5



Portable Mixers



1/2 HP motor. Lightweight, rugged steel drum. Mixes 3 cubic ft. of cement, mortar mix, or 7 bags of 60 lb. concrete mix. Electric motor allows for work indoors.

Mfg. No.	Order No.	Cap. Cu. Ft.
MIX3/27275	MST07275	3

CONSTRUCTION EQUIPMENT



Power Trowels



Heavy duty trowel with powerful fast pitch 5-1/2 HP Honda motor. Spider plate assembly is engineered for balance compensation and exacting tolerances. Sturdy, easy to clean chromed guard rings and steel handle for greater leverage and control. Close proximity of basic operating controls for safety and convenience.

Mfg. No.	Order No.	Blade Dia. In.	Engine
B436QP	BMIB436QP	36	5.5 HP Honda

Power Trowels



Adjustable handle, heavy duty clutch, precision balanced & rugged construction. Accurate troweling of wet concrete in areas such as: warehouses, factories, floor slabs, bridge decks, car parks.

Mfg. No.	Order No.	Combo Blade In.	Engine
B446QP	BMIB446QP	8" x 18"	Honda GX270

Power Screeds



Single operator use. Adjustable handles and handle mounted throttle with on/off switch. Low vibration, impact absorbing system. High frequency vibration levels concrete without build-up. Lightweight. Cutting and smoothing in a single operation. Blades are interchangeable with other wet screed units. Includes 4' and 12' blades.

Mfg. No.	Order No.	Engine	Blade Sizes
229202390523901	BM122920	1.3 HP Honda	4, 12



Trowel Blades Combination



Combination replacement trowel blades. 4-piece set.

Mfg. No.	Order No.	Dim. In. L x W
20479	BM120479	8 x 14



WACKER NEUSON

Plate Rammer 4 Cycle



Features air-cooled, single cylinder gasoline engine with low oil shut off sensor, air filtration system to protect motor, and guide handle with shockmount system for reduced vibration. 11" x 13" shoe size. BPM: 680 Stroke Lgth. In.: 2.2 Speed Ft./Min.: 41

Mfg. No.	Order No.	Ramming Speed Ft./Min.	BPM	HP	Fuel Cap. Gal.
5200018226	WACBS504S	684	680	3	.8

Vibratory Compactors Plate



Granular/mixed materials compactor for parking lots, highways, curbs and abutments. Iron baseplate, aluminum console and beltguard. Features 4-cycle, single cylinder gas engine, high inertia clutch with adjustable shims, and front lift cage. Baseplate measures 19.5" W x 23" L.

Mfg. No.	Order No.	Forward Speed Ft./Min.	VPM	RPM	Fuel Cap. Qts.
WP1550AW	WACWP1550A	100	6000	3600	3.8



Walk Behind Saws Soff-Cut



Has Soff-Cut™ technology which is a unique system for early entry concrete sawing. This technology enables concrete to be cut within the first one or two hours of finishing and before final set. Providing a solution for minimizing the risk of random cracking, and it simplifies the working process compared to conventional sawing. Has a 4.3 HP engine with a cyclone air filter, mechanical blade depth control and a retractable front guide system.

Mfg. No.	Order No.	Blade Cap. In.	Wt. Lbs.
966 84 48-05	HUC150	6	87

Walk Behind Saws



Adjustable handles for increased operator comfort. Adjustment allows operator to be positioned closer to cutting side for easier alignment and straighter cuts. Handle can also be folded for transport. Clear depth indicator makes adjusting easy for all blade diameters. The IntelliSeal blade spindle has four sealed radial bearings for strength and durability. Allows for a minimum of 500 hour maintenance intervals and a 1000 hour limited warranty. Large integrated water tank quick connection for water hose to the blade guard. No tools required for disassembly.

Mfg. No.	Order No.	Blade Cap. In.	Wt. Lbs.
965 14 82-08	HUCGS400	18	218.25



CONSTRUCTION EQUIPMENT

OZTEC

Concrete Vibrators Gasoline Backpack



1-3/4 HP Honda gasoline engine and "speed up" transmission for powerful and reliable vibrations. Ergonomically mounted OZTEC backpack offers maximum maneuverability on the job. Runs approximately 1 hour on full tank.

Mfg. No.	Order No.	VPM	Max Head Dia. In.
BP-35	OZTBP35	10,000	1-1/2

Concrete Vibrators Electric



115V, 17 amp, 2-1/4 hp electric concrete vibrator. Lightweight with adjustable shoulder strap. Quick Disconnect system allows for fast and easy shaft and head changes. Wrap around protective frame and shock absorbers protect motors from damage.

Mfg. No.	Order No.	VPM	Max Head Dia. In.
Model 2.4 OZ	OZT240Z	10,000	2-1/2

Concrete Vibrators



Wrap around protective frame and shock absorbers protect motor from damage. Lightweight, compact and fitted with comfortable and adjustable shoulder strap. Runs vibrator heads 11,000 to 12,000 vpm and comes standard with Quick Disconnect "QD" system for shafts and heads.

Mfg. No.	Order No.	HP	Volts	Amps
MODEL 1.2 OZ	OZT120Z	1-1/4	115	9

OZTEC

Vibrator Heads



Energy is efficiently transferred from the motor, via the shaft, to the head. Industry standard for use in most applications.

Mfg. No.	Order No.	Dia. In.	Lgth. In.
H1000Z	OZTH1000Z	1	13.25
H 150 OZ	OZTH1500Z	1-1/2	14

Vibrator Shaft Flexible Components



Carbon steel wire inner core. Abrasion-resistant neoprene rubber casing. Couple flexible shafts to 42 feet. Flexible, rigid shaft drives through concrete. Interchangeable on all Oztec power units. Includes Q.D. adapters.

Mfg. No.	Order No.	Lgth. Ft.
FS100Z	OZTFS100Z	10
FS 14 OZ	OZTFS140Z	14

Makita

Concrete Vibrators Dual Switch — LXT



Provides up to 25 min run time under load. Includes two 18V li-ion batteries, charger, case and protective cover to help prevent battery contamination. Vibrator size: 1" dia. 1" diameter vibrator.

Mfg. No.	Order No.	No Load Vib./Min.	Shaft Lgth. Ft.	OAL In.
XRV01	MAKXRV01	13,000	4	58-1/2
XRV02	MAKXRV02	12,500	8	105-1/2

DEWALT

Concrete Vibrators



1-1/8" diameter vibrator delivers maximum consolidation power. 4 foot long flexible shaft for easy use and long reach. 14,000 VPM (under load) delivers maximum consolidation efficiency.

Mfg. No.	Order No.	Desc.
DCE531M1	DWTDCE531M	VIBRATOR KIT

MARSHALLTOWN
The Premier Line

Rebar Benders



Mfg. No.	Order No.	Cap. In.	Lgth. In.
14739	MST14739	5/8	34

HKP

Rebar Benders



Extra-sturdy steel handles and super-strong indexing head grips rebar securely. Dual use head bends 3/8" and 1/2" rebar. Push button extends bender to 35"; collapses to 21". 14-position indexing head adjusts with center push button.

Mfg. No.	Order No.	Cap. In.	Lgth. In.
14739	POR24877	1/2	35

**REBAR
BN
TOOLS**

Rebar Bender/Cutters Manual



Cam mechanism for leverage to cut and bend grade 60 rebar. Adjustable 2-1/2" diameter bending roller and replaceable cutting jaws. Frame is firmly mounted on 2" x 8" x 60" wooden board. 12" long no-slip handle grip, lifting chain and ring. 0 – 180° bending capability. 60-1/2" L x 7-1/2" W x 10" H overall dimensions.

Mfg. No.	Order No.	Cap. In.
Bending	Cutting	
MBC-16B	BNNMBC16B	5/8 5/8

www.aih.com

AIH ORDER DESK 907.276.7201 • 1-800-478-7201



**ALASKA INDUSTRIAL
HARDWARE**
A BSNC
COMPANY

CONSTRUCTION EQUIPMENT

MAX

Rebar Tying Tools 14.4V Li-Ion




Weighs 5.3lbs. Easy to handle. One hand operations allows worker to hold re-bar while tying. Auto shut off. Reversible belt hook. Uses only MAX genuine TW898, TW898-PC and TW898-EG wire. Enclosed design and has blow out channels for daily blow out of tool with compressed air and easy cleaning.

Mfg. No.	Order No.	Desc.	No. Batteries
RB398	MRBRB398	Cordless rebar tying tool	1



Rebar Protector Caps Bargard® — PC-110®



Fits rebar #3-#8. Resists chemicals and environmental extremes. Hi-viz orange color aids visibility. Meets OSHA Construction Safety Orders Section 1712 when properly installed.

Mfg. No.	Order No.	Fits Rebar Dia. In.
14640-4	AAS146404	3/8 to 1



Tie Wire Reels



Smooth aluminum alloy construction. Steel wear parts. Features rewind knob and removable cover plate.

Mfg. No.	Order No.	Desc.
27400	KLN48190	Tie wire reel



Tie Wire Reels



Made of lightweight durable plastic to give many years of trouble free use. Fits any standard size belt. Accommodates all types of tie wire.

Mfg. No.	Order No.	Desc.
TWR26	MST16026	Tie Wire Wheel

MAX

Tie Wire Rebar



Steel wire, 50 rolls per pack. Approx. 120 ties per coil. Use with RB397 rebar tying tool.

Mfg. No.	Order No.	Wire Ga.	Spool Lgth. Ft.
TW898	MRBTW898	21	312



Tie Wires



Mfg. No.	Order No.	Wire Ga.	Spool Lgth. Ft.
16-1/2 GAUGE	WIR16	16-1/2	400

Tie Wires Pre-formed



16-gauge. 1000 per bag.

Mfg. No.	Order No.	Size In.
6" BAG TIE	KIR6BAGTIE	6



Tie Wire Twisters Rebar



Safely and easily twists wire bar ties. With contoured rubber grip handle. Twists most ties with a single pull. Spares fingers and other tools from the stress of tie wrapping rebar.

Mfg. No.	Order No.	Handle Lgth. In.
12637	MST02637	12

Tie Wire Twisters



For twisting wire bar ties safely.

Mfg. No.	Order No.	Desc.
14731	MST04731	Tie wire twister



Rebar Grade 40



Unfinished steel construction. Grade 40 rebar used as reinforcement in concrete such as foundations, slabs, patios, driveways, sidewalks and curbs. Ridges help concrete to grip the bar. Minimum yield strength of 40,000 PSI.

Mfg. No.	Order No.	Dim. Dia. x L
REBAR	KIR524	#5 (5/8") x 2'
REBAR	KIR5120	#5 (5/8") x 10'

Form Stakes Drawn Point



Drawn point stake with holes. Use to hold concrete form boards in place with double head nails.

Mfg. No.	Order No.	Dim. In. L x W
DP90 30"	KIR30FS	30 x 3/4

CONSTRUCTION EQUIPMENT



Concrete Tampers Pul-Krete™



Cold-rolled 12 ga. steel blade. Includes hardwood handle.

Mfg. No.	Order No.	Handle Lgth. In.
CM419	MST03877	54



Foamboard Staplers



For use in in-floor radiant heating installation. Features one-piece aluminum magazine, leaf spring controlled stop and ergonomic D-grip handle. Operates from standing position.

Mfg. No.	Order No.	Desc.
FBSN	MLC53273	Foamboard stapler

Staples

Mfg. No.	Order No.	For Board Thick In.	Size In.
FBSN2	MLC53275	2	2-1/2



Concrete Tampers Jitterbug™



Reinforced round hole grill. Balanced handle with rubber grips.

Mfg. No.	Order No.	Dim. In. L x W
T48	MST04722	48 x 6-1/2



Screeds



High strength alloy construction with end caps. Rust, rot and warp resistant.

Mfg. No.	Order No.	Lgth. Ft.	Dim. In. H x W
14770	MST04770	8	1-1/2 x 3-1/2
14772	MST04772	12	1-1/2 x 3-1/2

Bull Floats Round end — With Finishers Tote



Round end bull float, four 1-3/8" x 48" handles and tote bag. Outside cinching straps for holding four ft. levels, darbies, long trowels and brooms, multiple pockets hold a variety of tools.

Mfg. No.	Order No.	Lgth. In.	Handle Dia. In.
BFKIT6/17395	MST47395	48	1-3/8

Bull Floats Round End



Extruded magnesium alloy construction. Round edge design prevents finishing marks. Measures 48" x 8".

Mfg. No.	Order No.	Desc.
MB48RR	MST03866	Bull float with BF9 bracket

Bull Floats Round End — Fresno



Round end blue steel Fresno with adjustable threaded bracket. Can be used with all Marshalltown bull float brackets with two-hole mounting options.

Mfg. No.	Order No.	Dim. In. L X W
FRB36RTA	MST03572	36 x 5



Bull Float Brackets Rock-It™ 2.0



Allows multi-angle floating and long range extensions. Fits magnesium bull floats without additional adapters. Features 1/2 turn pitch control.

Mfg. No.	Order No.	Fits Snap Handle Dim. In.
BF9	MST04799	1-3/8 and 1-3/4

Handle Extensions Push Button



Constructed of thick-walled aluminum tubing. Heat treated, lightweight design features quick connect snap spring locking handle in place.

Mfg. No.	Order No.	Dim. In. L x Dia.
17-6ASU	MST04258	72 x 1-3/8
PB96L	MST04847	96 x 1-3/4

Handle Extensions



Rigid tubular construction. Large threads for easy coupling.

Mfg No.	Order No.	Dia. In.	Handle Lgth. Ft.
B5-72	MST04804	1-3/4	6

Push Button Adapters Male End



Converts push button handles to threaded extension handles. For tools with threaded end, such as bull floats, concrete brooms etc.

Mfg. No.	Order No.	Dia. In.
17-17M7	MST04255	1-3/8

CONSTRUCTION EQUIPMENT




Angle Adapters Mini Rock-It™



Connects push button handles to edgers, groovers, fresnos and bull floats. Multi-position handle placement within 180° sweep.

Mfg. No.	Order No.	Dia. In.
16-MR	MST04252	1-3/8

Walking Edgers 2-Way



Blue steel construction. Two-way handle attachment allows 180° movement. Use #9 or #10 handle (not included). Used to produce radius at edge of concrete slab to prevent edge from chipping off.

Mfg. No.	Order No.	Radius In.	Lip In.	Dim. In.
3768	MST03768	1/2	5/8	9 x 10

Walking Groovers



Long-wearing zinc construction. Both ends turned up for use in either direction. Smooth finish. Bit size 1" x 3/8". Use with Model 9 or 10 handle.

Mfg. No.	Order No.	Radius In.	Lgth. In.	Width In.
836	MST04108	1/4	8	4-3/8

Concrete Groovers



Stainless steel blade with DuraSoft® handle.

Mfg. No.	Order No.	Groove Size In.	Lgth. In.	Width In.
180D	MST04102	1/2 x 1/2	6	3



Concrete Edgers Curved End



Heavy gauge high carbon steel blade. Resilient DuraSoft® handle provides a soft feel, reduces fatigue, and offers excellent durability. Curved ends prevent edger from digging in to wet concrete.

Mfg. No.	Order No.	Radius In.	Lip In.	Dim. L x W
136D	MST04146	3/8	1/2	6 x 3


Hand Edgers Straight End



High grade blue steel blade with sturdy steel mounting and wooden handle. Used to produce a radius at the edge of a concrete slab to prevent the edge from chipping.

Mfg. No.	Order No.	Dim. In. L x W	Radius In.	Lip In.
CE562B	MST03984	6 x 6	1/2	5/8

Step Tools




MST04214

Blue steel construction. Features resilient DuraSoft® handle for comfort.

Mfg. No.	Order No.	Radius In.	Dim. In. L x W x D	Type
174BD	MST04214	1/2	6 x 6 x 6	Cove



Curb/Sidewalk Tools Stainless Steel

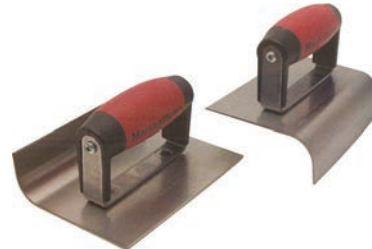

Resilient DuraSoft® handle provides a soft feel, reduces fatigue, and offers excellent durability. Blade measures 6" x 4". Made of premium stainless steel.

Mfg. No.	Order No.	Radius In.	Lip In.	Type
4268D	MST04268	3/4	1-1/2	Curb OS
4269D	MST04269	3/4	1-1/2	Sidewalk IS

Hand Edgers Straight End



Blue steel blade construction with steel mounting. DuraSoft® handle provides comfort and durability plus reduces fatigue.

Mfg. No.	Order No.	Radius In.	Lip In.	Dim. In. L x W
163BD	MST04172	1/2	5/8	6 x 6
167BD	MST04162	3/4	7/8	9 x 6

Darby Trowels Extruded Magnesium



Extruded from very hard, durable, lightweight magnesium. Blade is tapered from 3" at the heel to 2" at the toe. With DuraSoft® handle for comfort.

Mfg. No.	Order No.	Lgth. In.	Heel Width In.	Toe Width In.
4615D	MST04615	30	3	2



CONSTRUCTION EQUIPMENT



Darby Trowels Mahogany



Straight grain mahogany construction. Unique two-way tapered blade. Larger handle for more knuckle room. 3/4" blade thickness.

Mfg. No.	Order No.	Lgth. In.	Width In. Heel	Width In. Toe
152	MST04509	36	3-1/2	2

Hand Floats Lightweight



Extruded high strength alloy construction with soft grip handle. Blade pre-shaped across length and width.

Mfg. No.	Order No.	Dim. In. L x W
MF380R	MST03822	15-1/2 x 3-1/8

Hand Floats Wood — Square End



Constructed of imported Jarrah hardwood. Outlasts many ordinary wood floats and won't "fuzz up". DuraSoft® handle provides a soft feel, reduces fatigue, and offers excellent durability.

Mfg. No.	Order No.	Dim. In. L x W
147D	MST04507	16 x 3-1/2

Hand Floats Wood — Square End



3/8" laminate canvas resin construction. Performs like wood but lasts longer. With DuraSoft® handle for comfort.

Mfg. No.	Order No.	Dim. In. L x W
4526D	MST04526	16 x 3-1/2



Hand Floats Magnesium



Extruded magnesium with DuraSoft® handle.

Mfg. No.	Order No.	Dim. In. L x W
142D	MST04609	12 x 3-1/8
145D	MST04610	16 x 3-1/8
146D	MST04611	20 x 3-1/8

Finishing Trowels High Carbon Steel



High grade hardened and tempered steel construction with lightweight aluminum alloy mounting and resilient DuraSoft® handle.

Mfg. No.	Order No.	Dim. In. L x W
MXS66FRD	MST03523	16 x 4
MXS20FRD	MST03527	20 x 4

Finishing Trowels Aluminum



Aluminum alloy mounting with cured DuraSoft® handle.

Mfg. No.	Order No.	Dim. In. L x W
MXS56D	MST03205	12 x 3
MXS62D	MST03209	12 x 4
MXS66D	MST03249	16 x 4
MXS81D	MST03269	18 x 4
MXS205D	MST03277	20 x 5

Midget Trowels Stainless Steel



High grade hardened and tempered steel construction with lightweight aluminum alloy mounting and resilient DuraSoft® handle.

Mfg. No.	Order No.	Dim. In. L x W
11D	MST03104	8 x 3



Brick Jointers Steel



High carbon steel blades with convex face and concave joint. Each end is a different size for making different size joints.

Mfg. No.	Order No.	Dim. In. L x W
80/15522	MST05522	10-1/2 x 1/2 & 5/8

Margin Trowels



Tempered and ground tool steel blade with Durasoft® handle and metal ferrule.

Mfg. No.	Order No.	Dim. In. L x W
52D	MST01198	5 x 2
54D	MST01204	5 x 1-1/2
58D	MST01209	8 x 2

Brick Trowels London Pattern



Taper ground and polished tool steel blade with DuraSoft® handle. Hard polymer bumper and integral finger guard.

Mfg. No.	Order No.	Dim. In. L x W
33-11FG	MST00123	11 x 4-7/8

Pointing Trowels



Tool steel blade with polished steel ferrule and DuraSoft® handle.

Mfg. No.	Order No.	Dim. In. L x W
45-5D	MST01125	5 x 2-1/2
45-6D	MST01127	6 x 2-3/4
45-7D	MST01131	7 x 3

CONSTRUCTION EQUIPMENT



Trowels Economy



Features steel blade, aluminum mounting and curved handle.

Mfg. No.	Order No.	Dim. In. L x W
999S	MST03300	16 x 4

Trowels Economy — High Carbon Steel



Tempered, polished steel blade construction with cast aluminum mounting and comfort grip. Designed with square shank to prevent handle from turning.

Mfg. No.	Order No.	Dim. In. L x W
FT372R	MST03817	12 x 4
FT375R	MST03837	18 x 4

Knee Boards Stainless Steel



Made of 16 ga. stainless steel, with built-in toe brackets. Smooth sliding surface and rounded corners for easy movement.

Mfg. No.	Order No.	Pkg. Qty.
KB459	MST06459	1 Pair

Kneeler Boards



Provides comfortable support for knees. Constructed of polypropylene tray with black foam pad securely fastened. Features large handle grips.

Mfg. No.	Order No.	Pad Dim. In. L x W
KB451	MST06451	19 x 13-1/2



Grout Bags



Seamless vinyl construction with replaceable 3/8" metal tip. Used for holding and dispensing grout or mortar. Easy-to-clean for reuse.

Mfg. No.	Order No.	Dim. In. L x W
GB692	MST07818	24 x 12



Rubbing Bricks Fluted — with Handle



Fluted hand rubbing bricks with handle make quick work of removing mold and form marks. The firmly attached handle reduces fatigue and facilitates overhead, wall, and floor work. Features contoured handle and extra coarse crystolon abrasive.

Mfg. No.	Order No.	Dim. In. L x W x H
1463687795	NTN87795	8 x 3-1/2 x 1-1/2



Work Benches 4-Drawer



Hardwood construction with lacquer finish. Four 21" W x 12-3/4" D x 3" H drawers. Includes bottom shelf for larger tools. Wood block vise with adjustable machined guides.

Mfg. No.	Order No.	Wood Vise Cap. In.	Overall Dim. In. L x W x H
WBH4D	GLOWBH4D	7	60 x 20-1/8 x 33-1/4

Work Benches Stainless Steel



18 gauge stainless steel top, with swivel casters

Mfg. No.	Order No.	Overall Dim. In. L x W x H.
SSWT49C	GLOSSWT49C	49 x 24 x 36



Work Benches Aluminum — Adjustable



Folds up and locks shut. Constructed of high strength aluminum alloy with locking height slide adjusts in 2" increments, and rubber feet to prevent slipping.

Mfg. No.	Order No.	Ht. In.	Load Limit Lbs.
WB700	MST03700	18 to 30	500



CONSTRUCTION EQUIPMENT



Sawhorse Workstation Portable



Over 1 ton of maximum clamping force. Solid, all-steel construction provides rigidity and strength. Foot pedal lever creates hands-free clamping force. Portable folding design for space-saving storage. Integrated roller for easy transportation.

Mfg. No.	Order No.	Load Cap. Lbs..
RK9003	RKWRK9003	600



Folding Sawhorses Metal — Folding



Durable powder coated steel construction, padded top to protect work, convenient steel carrying handle. Fully assembled size: 19-1/4" x 39" x 30-3/4". Folded size: 2-1/2" x 4" x 39".

Mfg. No.	Order No.	Load Cap. Lbs.
W54035	WIM54081	250



Folding Sawhorses Steel



Stable all steel folding sawhorses, no assembly required. One piece stamped steel top measures 3-1/2 inches wide, One inch square heavy gauge tubular legs, spring loaded quick lock pin to securely hold the sawhorse in the upright position. Quickly folds into a compact size. Powder coat finish is rust resistant.

Mfg. No.	Order No.	Load Cap. Lbs. (Each)	(Open) Overall Dim. in In. H x L x W
PM3300	HTCPM3300	500	33 x 48 x 19



Folding Sawhorses Plastic — Folding



Plastic construction. Pair.

Mfg. No.	Order No.	Width In.
W54011	WIM54011	21



Sawhorse Brackets



Steel construction, rust resistant finish. Light duty for dressed or common 2" x 4" lumber. Flanged nail holes for easy removal of nails. For carpenter's sawhorse, barricades, temporary tables.

Mfg. No.	Order No.	Desc.
SHB1	GRNSHB1	Sawhorse brackets



Drywall Saws Soft Grip



Hardened and tempered blade. Cuts quickly through wallboard, gypsum, lath, and thin coat backing board. Soft grip handle.

Mfg. No.	Order No.	Blade Lgth. In.	Teeth Per In.
SGDS32	MST03732	15	5



Wallboard Saws



Designed for making cutouts in plasterboard. Epoxy-bonded blade ferruled to stained wood handle.

Mfg. No.	Order No.	Blade Lgth. In.
15-206	STA15206	6



Drywall Cutters



Cuts circles up to 16" diameter. Calibrated steel shaft.

Mfg. No.	Order No.	Lgth. In.
CC766	MST14556	8-1/2



Drywall Hammers



Nylon-vinyl grip.

Mfg. No.	Order No.	Head Wt. Oz.	OAL In.
E3-11	ESTE311	14	13-1/2

CONSTRUCTION EQUIPMENT

VAUGHAN®

Drywall Hatchets



Full polished head with milled, crowned face 1-3/4" cut blade. Also features flat nailing head on opposite end. Flame-treated hickory handle.

Mfg. No.	Order No.	Head Wt. Oz.	Lgth. In.
210-01/WB	VHN21001	12	15-1/4



Drywall Carts



8" casters – two swivel and two fixed, powder coat paint finish, removable handles for storage and portability. Deck dimensions 43" L x 12" W.

Mfg. No.	Order No.	OAL Dim. In. L x W x H	Load Cap. Lbs.
DWCART	GLODWCART	49-3/4 x 22-1/2 x 47	3000

Drywall/Panel Hoists



Easy to assemble. Folds up for compact storage and has powder coat paint finish.

Mfg. No.	Order No.	Min. Ht. Ft.	Max. Ht. Ft.	Load Cap. Lbs.
DPH11	GLO00107	4	11	150

Panel Hoist Extensions



Allows hoist to extend, also has a powder coat paint finish. For use with model DPH11.

Mfg. No.	Order No.	Min. Ht. Ft.	Max. Ht. Ft.
DPHEXT	GLO00108	6	15



Roll Panel Lifters



Steel construction with ribbed back, weighted nose and roller-wheel. Allows one-man handling and nailing.

Mfg. No.	Order No.	Dim. In. L x W
4591	MST04591	15 x 2-1/4

Drywall Board Lifters



Stirrup design with non-slip checkering to provide foot traction. Tapered front end slides under board, then unit lifts and holds board in place for nailing. Self-righting feature for ease of use.

Mfg. No.	Order No.	Dim. In. L x W
790	MST05330	12 x 5-1/4

Drywall Tapers



Lightweight aluminum construction. Features one-handed mud loading with adjustable mud flow control, adjustable web side handle, serrated cut-off blade and soft grip handle.

Mfg. No.	Order No.	Desc.
6024	MST06024	Drywall taper

Drywall Mud Mixers Quik-Mix®



Blade welded to 3/8" x 28" hex shaft which fits 3/8" or larger slow speed (500 RPM) drill.

Mfg. No.	Order No.	Blade Dim. In. L x W
819	MST06389	8-1/2 x 4-1/2



Drywall Stilts Adjustable



Lightweight, strong aluminum alloy construction. Adjustable calf brace with pads and leg bands. Heavy gauge overlapping aluminum leg tubes. Metal buckle and straps and heel plates for safety. 3-position heel bracket for different tool sizes and prevents slippage. Dual action springs for flexibility. Adjustable from 18" - 30".

Mfg. No.	Order No.	Load Limit Lbs.
RG1830	GLORG1830	225



Mixers Adjustable Fan Blade



Two-wheel adjustable fan blade mixer features a plated shaft and corrosion resistant blades. Mixes fast as lower wheel cuts upward and upper wheel downward to create counter flow. 5" mixer fits 1/2" variable speed drill.

Mfg. No.	Order No.	Lgth. In.
FM661	MST04661	24

Taping Knives



Tempered stainless steel blade flexes for feathering. Aluminum backing plate and DuraSoft® handle.

Mfg. No.	Order No.	Blade Lgth. In.	Blade Width In.
3508SD	MST04321	8	3
3510SD	MST04323	10	3
3512SD	MST04325	12	3

CONSTRUCTION EQUIPMENT



Taping Knives Pro-Style



Blue steel blade construction with plastic handle molded to aluminum backing plate. Tapered design for close corners.

Mfg. No.	Order No.	Dim. In. L x W
BSTK8P	MST08720	8 x 3
BSTK12P	MST08722	12 x 3



Taping Knives Ergo 2000™



High carbon steel blade with ergonomic handle. Brass plated, solid steel nail setting head.

Mfg. No.	Order No.	Lgth. In.
6216EZ	RDD00620	5
6218EZ	RDD00623	6

Taping Knives



High carbon precision-ground steel blade extends through black poly handle. Blade lacquered for rust resistance. Brass plated, solid steel nail setting head.

Mfg. No.	Order No.	Lgth. In.
4214	RDD4214	4
4218	RDD4218	6



Trowels V Notched



Cast aluminum alloy mounted to tempered steel blade. For spreading adhesive or mastic on surface before laying tile, carpet, or other floor coverings. Soft feel DuraSoft® handle.

Mfg. No.	Order No.	Notch Depth In.	Notch Width In.
771SD	MST05802	3/16	5/32



Corner Trowels



Inside trowels with stainless steel blade and aluminum mounting. Features DuraSoft® handle with finger guard.

Mfg. No.	Order No.	Blade Dim. In. L x W
23D	MST05323	4 x 5

Knockdown Knives GE Lexan® Blade



Threaded DuraSoft® handle, metal ferrule and hanging hole. Can be used for texturing.

Mfg. No.	Order No.	Size In.
KD24	MST04397	24

Plastering Hawks Aluminum



Used for holding plaster during application. Heavy gauge hard-rolled aluminum construction. Lightweight design features smooth edges, rounded corners, threaded flange, wood handle and sponge callus preventer.

Mfg. No.	Order No.	Dim. In. L x W	Flange In.
AH659	MST04659	13 x 13	3-5/8

Mud Pans Stainless Steel



Tapered ends and sides with mud-tight seams. Sheared sides allow easy cleaning of knives.

Mfg. No.	Order No.	Dim. In. L x W x H
MP657	MST04657	14-7/16 x 4-1/2 x 2-13/16



Mud Pans Plastic



Long wearing chemical and temperature-resistant body with hang-up tab. Non-slip textured exterior. Two metal wiping blades.

Mfg. No.	Order No.	Lgth. In.
814	MST06394	13

Hopper Guns Sharpshooter I™



For spraying walls and ceilings. Features seven orifice sizes for greater texture variety, tubular design for reduced overspray, flow shutoff to prevent leaks, easy-pull swing trigger for reduced fatigue, and seamless plastic hopper to eliminate buildup and clogging. Nylon gun includes air control valve to adjust flow at gun rather than at pump.

Mfg. No.	Order No.	Desc.
693	MST06356	Sharpshooter I™ hopper gun



Drywall Sanders with Dust Collection



For finishing walls and ceilings. Features built in dust collection hose, brush-type skirt around pad and articulating sanding head for sanding ceilings or walls without changing positions. 3.5 Amps, 120V. Includes foam-backed sanding pad, hook-and-loop straps for mounting power cord to vacuum hose.

Mfg. No.	Order No.	Hose Dia. In.	Hose Lgth. Ft.	RPM	Pad Dia. In.
7800	PRT7800	1-1/4	13	1400 to 2000	8-7/8

CONSTRUCTION EQUIPMENT

PORTER CABLE

Sanding Disc Kits Hook-and-Loop



Includes five sanding discs and back-up pad.

Mfg. No.	Order No.	Grit
79080-5	PRT79080-5	80
79150-5	PRT79150-5	150
79220-5	PRT79220-5	220



Hand Sanders



Foam pad with aluminum backing plate and one-piece handle clamp designed for pre-cut or half sheet standard sandpaper.

Mfg. No.	Order No.	Dim. In. L x W
20D	MST06320	9-3/8 x 3-1/4

Swivel Pole Sanders



For sanding drywall joints. Foam rubber pad bonded to reinforced die-cast aluminum plate with positive clamps which lock sandpaper in place. Use with Model 28 or 28L pole sander handle. Handle sold separately.

Mfg. No.	Order No.	Dim. In. L x W
26	MST04426	9-3/8 x 3-1/4



Pole Sander Handles



Hardwood with hammerhead tip.

Mfg. No.	Order No.	Lgth. In.
28	MST04827	48

Sandscreens



Die-cut. Open weave for wet or dry applications. Lasts longer than sandpaper. Fits all Marshalltown sanders and similar models.

Mfg. No.	Order No.	Sheet Dim. In. L x W	Grit
816	MST06592	11 x 4-3/16	120
817	MST06593	11 x 4-3/16	220



Pole Sanders Radial



Free-spinning circular head allows user to sand right up to a corner or ceiling. Circular design prevents rework caused by flipping and ripping. Includes pole and 6 hook and loop sanding discs.

Mfg. No.	Order No.	Dia. In.
G25650	GRNG25650	9

Sanding Replacement Discs

Mfg. No.	Order No.	Desc.
G25642	GRNG25642	Replacement sanding disc



Sanding Discs Goldblatt



Replacement sanding discs for most rotary sanders. 9" diameter. 15 discs per package.

Mfg. No.	Order No.	Grit
G25642	GRNG25642	120



Sandpaper



Die-cut. Fits all Marshalltown sanders and similar models.

Mfg. No.	Order No.	Sheet Dim. In. L x W	Grit
809	MST06589	11 x 4-3/16	80
811	MST06590	11 x 4-3/16	100
815	MST06591	11 x 4-3/16	150

Sanding Sponges



Abrasive side for wet sanding and a sponge side for removing residue creates a virtually dustless drywall sanding experience. Cleans easily so it is reusable as well.

Mfg. No.	Order No.	Dim. In. L x W x H
DWS467-3	MST06467	9 x 4-1/2 x 1-3/4



CONSTRUCTION EQUIPMENT



Floor Scrapers



Heavy gauge spring steel blade. Includes 5 ft. steel handle welded to heavy angle iron bracket. Plastic grip.


Mfg. No.	Order No.	Blade Dim. In. L x W
820	MST06398	20 x 4

Accessories

Mfg. No.	Order No.	Desc.
820B	MST06399	Replacement blade



Impact Tools Slamscaper®

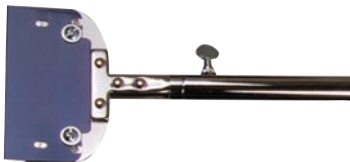

"Hammer and chisel" action allows quick and easy removal of tile, roofing, carpet and adhesive coverings. Carded.

Mfg. No.	Order No.	Lgth. Ft.
2105	RDD2105	5-1/4

Accessories

Mfg. No.	Order No.	Desc.
2106	RDD2106	6" Replacement blade

Pole Scrapers



Fits standard brooms or extension poles. For scraping in high, hard-to-reach places. 3" high-carbon steel blade. 6/pkg.

Mfg. No.	Order No.	Desc.
3016	RDD00633	Bent blade



Rubber Floats



Aluminum backing plate with handle bonded to 5/8" thick red rubber pad.

Mfg. No.	Order No.	Size In. L x W	Desc.
38	MST04404	9 x 4	Fine cell

Notched Trowels Standard — Square



Hard tempered steel blade with aluminum alloy mounting and DuraSoft® handle. NTCA approved.

Mfg. No.	Order No.	Notch Dim. In.	Blade Dim. In. L x W
702SD	MST05709	1/4	11 x 4-1/2
5779SD	MST05820	3/8	11 x 4-1/2

Notched Trowels 2-Sided — V-Shaped



Full hard steel blade construction with black plastic handle.

Mfg. No.	Order No.	Notch Dim. In.	Blade Dim. In. L x W
206	MST06250	3/16 x 5/32	9 x 4
226	MST06259	1/4 x 1/4 x 1/4	11 x 4-1/2



Laminate Rollers Adjustable



For use on counter tops, walls and resilient flooring applications. Features quick handle adjustments and roller without axle projections for flush work in corners. Resists rust.

Mfg. No.	Order No.	Lgth. In.
ER007	MST06007	17 to 27

Wall Patch Kits Self-Adhesive



Repairs walls without pre-plastering. Rust-resistant aluminum construction with fiberglass mesh.

Mfg. No.	Order No.	Dia. In.
DP4	MST16301	4 x 4
DP8	MST16303	8 x 8



Foam Applicator Guns Sharpshooter-X



Reusable, metal barrel with adjustable output foam gun. Coated non-stick basket. Plastic or brass extension tips can be added to extend reach and improve maneuverability.

Mfg. No.	Order No.	Desc.
4004510608	TNF10608	Sharpshooter-X foam gun

CONSTRUCTION EQUIPMENT



Foam Applicator Guns Economy



Reusable foam gun/applicator with zinc plated steel barrel. Adjustable output. Teflon coated non-stick basket. Shock-proof handgrip. Die-cast metal lever. Includes plastic extension tip to extend reach and improve maneuverability.

Mfg. No.	Order No.	Desc.
4004528775	TNF28775	Precision foam gun

Foam Sealants Gun Foam II Fireblock



An ICC code complying fireblock penetration sealant suitable for Type V residential constructions. Bright orange color alerts building inspectors that this foam has been tested with modified ASTM-814 and UL-1715 and evaluated by ICC-ES (ESR-1926). Withstands flaming over, lending crucial seconds to dangerous situations. Note: Gun Foam II is not a firestop.

Mfg. No.	Order No.	Vol. Oz.
4004528712	TNF00121	24

Foam Filler/Sealants Touch 'n Seal® — All Seasons



Cures quickly in temperatures from 20-120°F. Stops air infiltration; reduces heating and A/C bills. Cures tack-free in 5 minutes, trimmable in 10 minutes. Designed for use with applicator guns under plate line, at juncture of plate line and foundation, at corner and T-joints, or for filling holes in exterior sheeting. Solvent-free. Contains no CFCs or HCFCs.

Mfg. No.	Order No.	Size Oz.	Coverage Linear Ft.*
4004529812	TNF00044	24	3680

* Using 1/4" dia. bead.



Foam Filler/Sealants Touch 'n Seal® — No-Warp



Low-pressure formula fills gaps without bowing door or window frames. Stops air infiltration; creates moisture barrier. Cures tack-free in 10 minutes, trimmable in 30 minutes. Designed for use with applicator guns under plate line, at juncture of plate line and foundation, at corner and T-joints, or for filling holes in exterior sheeting. Solvent-free. Contains no CFCs or HCFCs.

MFG. No.	Order No.	Size Oz.	Coverage Linear Ft.*
4004529712	TNF29712	20	1979

* Using 1/4" dia. bead.

Adhesive Foam Heavy Duty — Construction



Touch 'n Seal Heavy Duty Construction Adhesive is an all-weather, one-component, ready-to-use foam that quickly condenses into a high-strength gel adhesive. It installs faster than traditional construction adhesives and has a yield that is up to 10X greater. Plus, it can be used on most common building materials including drywall, plywood, OSB, pressure-treated lumber, joists, concrete, steel, plastic and painted surfaces.

Mfg. No.	Order No.	Size Oz.
4001160320	TNF60320	24

Polyurethane Guns Construction Adhesive — Subfloor



Yields 10X more coverage, Installs fast and helps prevent floor squeaks, Bridges minor gaps on irregular surfaces. Bonds to wet and frozen lumber Helps prevent nail pops.

Mfg. No.	Order No.	Size Oz.
4006002470	TNF02470	24



Polyurethane Foam Touch 'n Seal® — Quick Cure



The easiest, most economical way for the professional to apply polyurethane foam. This dispensing system allows the applicator to fill hard-to-reach places.

Mfg. No.	Order No.	Coverage Linear Ft.
4004518100	TNF18100	2400 using 1/4 dia. bead

Polyurethane Foam Kits Touch 'n Seal — Two-Component



Portable, disposable and self-contained design with color-coded, pre-connected hoses. Provides consistent foam flow. Includes 10-ft. hose, 30-ft. hose, P2 gun with 10-ft. hose, conical and fan spray nozzles, and nozzle calibration kit.

Mfg. No.	Order No.	Board Yield	Ft. Cubic Ft.
4004520015	TNF00052	15	1.25
4004520200	TNF00060	200	16.60
4004520600	TNF00056	600	50.00

CONSTRUCTION EQUIPMENT



Replacment Hoses



Touch 'n Foam Professional 2 Component System 15. Completely self-contained; portable and disposable. Pre-attached hoses with nozzles for fast, easy set-up, Expands 30X, dries in less than one minutes.

Mfg. No.	Order No.	Weight
90325	TNF90325	4 Pounds


Foam Gun Cleaners Poly Clean II®



Easily cleans wet foam from hands, tools and applicator guns. Attach directly to the gun basket to flush barrel. Includes gun collar and applicator nozzle.

Mfg. No.	Order No.	Size Oz.
4004712022	TNF00015	12

Fan Nozzles



Fan nozzles for TNF00060 and TNF00056. Yellow.

Mfg. No.	Order No.	Pkg. Qty.
4004529940	TNF29940	25



Foam Sealants Minimal Expanding



Minimal-expanding formula for indoor and outdoor applications. Small cracks, voids, gaps around vents, plumbing fixtures, baseboards, skylights and electrical outlets.

Mfg. No.	Order No.	Size Oz.
4001012408	TNF00082	12

Foam Sealants Window and Door



For gaps/cracks around window frames, door jambs. Expanding low-pressure polyurethane foam seals and insulates without affecting window/door frame stability. Bright White.

Mfg. No.	Order No.	Size Oz.
4001044008	TNF04000	12



Foam Sealants Window and Door



Single component minimal expansion and low pressure polyurethane foam packaged in a pressurized metal container. Dispensed in bead form for sealing gaps and cracks, holes and voids around windows and doors. Efficient for stopping air loss and moisture infiltration. Quick setting formulation, can be cut or trimmed in less than 1 hour. Use straw or foam applicator gun.

Mfg. No.	Order No.	Size Oz.
1927125	OSI95969	16



Foam Insulation/Sealants Expanding — Reddy™



Expands to permanently seal cracks and openings. Will not crack or peel.

Mfg. No.	Order No.	Size Oz.
4001230111	TNF00021	11

CONSTRUCTION EQUIPMENT

**Touch
'n Foam**

Foam Sealants Flame Resistant FireBlock™



Fills/seals service penetrations to prevent fire from spreading. Self-extinguishing. Meets UL Class 1 and ASTM standards.

Mfg. No.	Order No.	Size Oz.
4004510024	TNF10012	12

Foam Sealants Triple Expanding Foam



Triple-expanding formula. Creates airtight, weather-resistant bonds in cracks and gaps. For indoor or outdoor use.

Mfg. No.	Order No.	Size Oz.
4001030103	TNF00031	12
4001020012	TNF00032	20

VICTOR

Welding/Cutting Kits VanGuard™ — Journeyman®



Includes CSR 450 Series regulators; 315FC torch handle; CA 2460 cutting attachment; "W" welding nozzle sizes 1, 3 and 5; eight MFA heating nozzles; 1-1-101 cutting tip.

Mfg. No.	Order No.	Desc.
0384-2036	VIC54857	Welding/cutting kit

Welding/Cutting Kits VanGuard™ — Contractor Plus™



Includes CSR 450 Series regulator; 315FC torch handle; CA 2460 cutting attachment; "2-W" welding nozzle; 1-1-101 cutting tip.

Mfg. No.	Order No.	Desc.
0384-2041	VIC54859	Welding/cutting kit

HOBART

Torch Kits Oxy/Acetylene



Includes oxygen and acetylene regulators, welding torch handle, three welding tips (#0, #2, #4), cutting attachment, cutting tip, heating nozzle, 12-1/2 ft. double line hose, goggles, striker and tip cleaner. UL listed.

Mfg. No.	Order No.	Desc.
770502	HOB770502	Complete torch kit

Milwaukee

Hand Trucks Gas Cylinder



Delivery truck for carrying two gas cylinders, with 10" pneumatic wheels that cushion the load and allow the truck to roll over uneven surfaces. 500 lb. load capacity Safety chains secure tanks plus a hook to hold the hose. 12" X 20.5" toe plate.

Mfg. No.	Order No.	Dim. In. W x H	Load Cap. Lbs.
40509	GLE40509	30 x 48-1/2	800



CONSTRUCTION EQUIPMENT

VICTOR

Torch Handles VanGuard™ — 300 Series



Heavy duty torch handle for welding, cutting and heating applications. Use with all fuel gas types. Vanguard™ safety features include built-in flashback arrestor and built-in reverse flow check valve. Hose connection 9/16"-18 thread.

Mfg. No.	Order No.	Lgth. In.
0382-0034	VIC15346	9

Cutting Attachments



Use with 300 Series torch handles. Heavy duty spiral mixer combines oxygen with fuel gas. Die-forged brass head; stainless steel lever and tubes; brass coupling nut and double O-ring tapered seal. Smooth push-type cutting valve. 10-1/2" length. Cutting range 8". Can be used with all fuel gases with appropriate cutting tip. UL listed.

Mfg. No.	Order No.	Tip Series	Head Angle
0381-0816	VIC06844	1	90°

HOBART

Twin Welding Hoses



Acetylene double welding hose comes complete with fittings. High-quality, neoprene-covered hose is flexible and kinkproof. Grade R (acetylene only).

Mfg. No.	Order No.	Dia. In.	Lgth. Ft.
770132	HOB770132	1/4	25
770133	HOB770133	1/4	50

VICTOR

Hose Couplings



VIC10863
For B-type tanks.

Mfg. No.	Order No.	Desc.
0960-0034	VIC10863	Acetylene
0950-0056	VIC11459	Oxygen

Cutting Tips Acetylene



Mfg. No.	Order No.	Tip Series	Size	Fits Torch Series
0330-0012	VIC11643	1	0	300
0331-0013	VIC03439	3	0	100
0330-0004	VIC11656	1	00	300
0330-0005	VIC11671	1	1	300
0331-0014	VIC03478	3	1	100
0330-0006	VIC11663	1	2	300
0331-0015	VIC03464	3	2	100

Heating Nozzles



For 300 Series torch handles. Use with acetylene or hydrogen fuel gas. 12" length.

Mfg. No.	Order No.	Size
0323-0252	VIC05426	8



Three-Flint Lighters Shurlite™



Made of plated and galvanized high tensile strength steel. Triangular flint holder may be easily rotated for a fresh flint.

Mfg. No.	Order No.	Desc.
FU-5011	ATW5011	Three-flint lighter
FU-5003X	ATW5003	Three-flint renewal



Single-Flint Lighters Shurlite™



Round file spark lighter with square hood.

Mfg. No.	Order No.	Desc.
FU-3001	ATW3001	Single-flint lighter



Accessories

Mfg. No.	Order No.	Desc.
FU-3011X	ATW3011	5-pack repl. flints

Tip Cleaner Sets



Includes 22 cleaners and de-burring file. Aluminum case with contained spool assembly. Stainless steel cleaners with tapered ends. Fits drill hole sizes 77-30.

Mfg. No.	Order No.	Desc.
MB-MTC	ATWWYP021	Master tip cleaner set

HOBART Gas Welding Rods



36" length. For copper-coated steel and bare brass. 2750°F melting temperature. 65,000 PSI tensile strength. 1 lb. packs.

Mfg. No.	Order No.	Rod Dia. In.
Copper-Coated Steel		
770514	HOB770514	3/32
770513	HOB770513	1/8
Bare Brass		
770510	HOB770510	3/32
770509	HOB770509	1/8
Flux-Coated Brass		
770512	HOB770512	3/32
770511	HOB770511	1/8

CONSTRUCTION EQUIPMENT



Soldering/Brazing Rods



MT030112: Ideal for aluminum repairs, windows, doors, gutters, also outboard motor casings and zinc based die castings.

MT031419: Join carbon and alloy steels, stainless steel, cast iron, nickel, brass and most different metals. Flux coated.

MT031603: Joins copper to copper, used for repairs on refrigeration, electrical and plumbing.
MT032302: Repairs steel, cast iron, copper base metals, galvanized and malleable irons. Flux coated.

Mfg. No.	Order No.	Type.	Working Temp. °F	Pkg. Qty.
MT300AL	MT030112	Soldering	700	3
MT300NS	MT031419	Brazing	1250-1750	2
MT300PC	MT031603	Soldering	1450	3
MT300WB	MT032302	Brazing	1600	3

HOBART Brazeing Fluxes



For use with bare brass. Cleans well to allow for good adhesion.

Mfg. No.	Order No.	Wt. Lb.
770119	HOB770119	1/2

HOBART

Mig Welders Handler® — Model 190



Flux core and MIG welding of aluminum, mild and stainless steel in maintenance, construction, auto body, rental, home applications. 10 ft. welding gun with 10 ft. cable. Includes sample spool of .030" flux cored welding wire and extra .030" contact tips. Spool gun ready for setup with the SpoolRunner™ 100.

Mfg. No.	Order No.	Amps AC	Weld Thick. In.	Input Volts AC
500544	HOB500554	25-190	5/16	230

Mig Welders Handler® — Model 140



For flux core and MIG welding of steel, stainless steel and aluminum in maintenance, construction, auto body, farm, rental and home applications. Trigger activated arc, wire feed speed tracking and 10 ft. gun cable.

Mfg. No.	Order No.	Amps AC	Weld Thick. In.	Input Volts AC
500559	HOB500559	25 - 140	1/4	115

Stick Welders Stickmate® LX 235 AC



Accu-Set indicator for controlling amperage or heat output. High/low range output selector switch. Replaceable weld cables. Includes 15 ft. electrode cable, heavy duty holder, 10 ft. work cable with clamp, 6 ft. primary cable.

Mfg. No.	Order No.	Amps	Weld Thick. In.	Input Volts
500421	HOB500421	30 - 235 AC 30 - 160 DC	1/2 AC 1/4 DC	230

HOBART

Small Welding Carts With Cylinder Rack



Mobility and storage for Hobart Handler 140 MIG welder, argon cylinders and other accessories. Power source mounts to top, cylinder rack supports argon cylinder. Cylinder rack fits gas bottles up to 7" diameter and 75 lbs. Two 8" wheels; two swivel casters for mobility.

Mfg. No.	Order No.	Desc.
194776	HOB194776	Welding Cart

Plasma Cutters Airforce 12ci



Built in Air Compressor. Cuts faster than oxy fuel. Smaller heat-affected zone for less warping. No gas pressure settings for flame tuning needed. More precise cut, thinner kerf, less slag to clean up.

Mfg. No.	Order No.	Amps	Weld Thick In.	Volts
500564	HOB500564	20	1/4	120

Spool Guns SpoolRunner 100



Easily accessible drive rolls, Screw-style drive roll tension adjustment. Spring-loaded tension-release arm for easy wire loading. Internal adjustment for spool hub tension. Clear spool cover: keeps wire clean, allows easy visibility of wire supply. Fits handler 190.

Mfg. No.	Order No.	Voltage
300796	HOB300796	76



CONSTRUCTION EQUIPMENT

HOBART

Welding Wires E705-6 — Solid Carbon Steel



For construction, fabrication, shaft buildup and general shop applications.

Mfg. No.	Order No.	Wire Dia. In.
	2 lb. Spools	
H305401R19	HOB24990	.023
H305406R19	HOB24992	.030
H305408R19	HOB24994	.035
	10 lb. Spools	
H305401R22	HOB24991	.023/.024
H305406R22	HOB24993	.030
H305408R22	HOB24995	.035

Welding Wires E71TGS — Flux Cored



Carbon steel wire. For thin-gauge mild or galvanized steel. Ideal for light structural, prefab construction and general fabrication work.

Mfg. No.	Order No.	Wire Dia. In.
	2 lb. Spools	
H222106R19	HOB24996	.030
H222108R19	HOB24998	.035
	10 lb. Spools	
H222106R22	HOB24997	.030
H222108R22	HOB24999	.035

Welding Wires ER4043 — Aluminum



General-purpose aluminum alloy with relatively high shear strength and excellent corrosion resistance. 1 Lb. spool.

Mfg. No.	Order No.	Wire Dia. In.
H381806R18	HOB24901	.030
H381808R18	HOB24902	.035
H381806R18	HOB24903	.030

HOBART

Welding Electrodes 6011



Stick electrodes for use in all positions on carbon and galvanized steel. 60,000 PSI tensile strength. AC/DC compatible. Includes plastic case.

Mfg. No.	Order No.	Rod Dia. In.
	1 lb.	
H112244R01	HOB24841	1/8
	5 lb.	
770456	HOB770456	3/32
770459	HOB770459	1/8
	10 lb.	
770460	HOB770460	1/8

Welding Electrodes 6013



Stick electrodes for use in all positions, on carbon steel. Runs on AC or DCEP (reverse) polarity or DCEN (straight) polarity. 60,000 psi tensile strength.

Mfg. No.	Order No.	Rod Dia. In.
	1 lb.	
H117144R01	HOB24853	1/8
	5 lb.	
770466	HOB770466	3/32
770469	HOB770469	1/8
	10 lb.	
770470	HOB770470	1/8

Welding Electrodes 7018



Low-hydrogen. For use in all positions on carbon steel. 70,000 PSI tensile strength. AC/DC compatible. Includes plastic case. Note: Not recommended for low-voltage AC welders.

Mfg. No.	Order No.	Rod Dia. In.
	5 lb.	
770482	HOB770482	3/32
770478	HOB770478	1/8
	10 lb.	
770476	HOB770476	3/32
770479	HOB770479	1/8

HOBART


Welding Electrodes 4043 — Aluminum



For flat, horizontal and vertical welding applications. DC only.

Mfg. No.	Order No.	Rod Dia. In.	Pkg. Qty.
H722844RDP	HOB24989	1/8	10

Welding Electrodes 3086 — Stainless Steel



Forms smooth, tough welds on 304 and 308 stainless base metal. AC/DC electrode positive (reverse) polarity.

Mfg. No.	Order No.	Rod Dia. In.	Pkg. Qty.
H481930RDP	HOB24983	3/32	5

Electrode Storage Cans



For keeping electrodes dry and fresh. Features airtight seal, belt clip and internal divider with four sections. Electrodes not included.

Mfg. No.	Order No.	Desc.
770073	HOB770073	Electrode storage can

Electrode Holders 300 Amp



Solid brass spring-loaded jaws hold rod in 45°, 90° and 180° positions.

Mfg. No.	Order No.	Max. Rod Dia. In.
770027	HOB770027	1/4

CONSTRUCTION EQUIPMENT

HOBART Ground Clamps T-Style



Brass construction. Strong springs for excellent clamping power and superior electrical connections. Circular shaped jaw inserts help for clamping onto irregular shapes.

Mfg. No.	Order No.	Max. Amps
770031	HOB770031	400

Contact Tip and Electrode Kits AirForce 250ci



Torch consumables contact tip and electrode kit.

Mfg. No.	Order No.	Desc.
770496	HOB770496	Tip replacement kit

Replacement Nozzles Wire Feed Welders



Slip on nozzle for Handler 125, 135, 140, 175, 180 and IronMan 210.

Mfg. No.	Order No.	Dia. In.	Pkg. Qty.
770404	HOB770404	1/2	1

Contact Tips MIG Welding



5 per package.

Mfg. No.	Order No.	Dia. In.
770177	HOB770177	.030
770180	HOB770180	.035

HOBART Contact Tips SpoolRunner 100



Tweco, Lincoln Electric Magnum, Miller Gold Seal, Craftsman, Campbell-Hausfield, Binzel. Also for Century and other brands with Tweco or Binzel-type guns. 5 per package.

Mfg. No.	Order No.	Size
186406	HOB186406	.035
186419	HOB186419	.030

Plasma Torches Electrode Kits



For use on Airforce 12i, 27i, and 40i, Contains 2 electrodes. Compatible with XT12R, XT30R, and XT40R Torches.

Mfg. No.	Order No.	Pkg. Qty.
770791	HOB770791	2

Plasma Cutter Tip Kits



Kit contains cup, swirl ring, and o-ring. Designed for AirForce 250Ci plasma torch.

Mfg. No.	Order No.	Desc.
770497	HOB770497	Torch Consumable Kit

Torch Parts Kits Plasma Cutter



A Hobart plasma accessory kit thats designed specifically for use with the Hobart Airforce 12ci Plasma Cutter. Includes Cup, Swirl Ring, and O-Ring.

Mfg. No.	Order No.	Desc.
770794	HOB770794	Parts kit for Hobart 12i

HOBART Cutting Tips Plasma Torch



Designed specifically for use with the Hobart Airforce 12i Plasma Cutter. Includes 2 accessory type tips.

Mfg. No.	Order No.	Pkg. Qty.
770795	HOB770795	2

Magnetic Holders



Holds steel pieces securely at 45°, 90° and 135° angles.

Mfg. No.	Order No.	Size	Max. Load Lbs.
770062	HOB770062	Small	35
770063	HOB770063	Large	50
770064	HOB770064	X-Large	75

Anti-Spatter Compounds Nozzle Gel



Prevents adhesion of spatter to MIG gun nozzle and weld surface.

Mfg. No.	Order No.	Wt. Oz.
770074	HOB770074	16

Welding Blankets



Heat-treated fiberglass and heavy duty Kevlar® stitching for protection. Brass grommets. Includes reusable storage bag.

Mfg. No.	Order No.	Dim. Ft.
770635	HOB770635	4 x 6

CONSTRUCTION EQUIPMENT



Pipe Wrap-A-Round Welding



Economical tool for marking straight lines around pipe, or for use of a straight edge. Made out of flexible gasket material, with good resistance to heat and cold. Material types are asbestos free. All sizes are printed with a scale in inches, itch chart, tangent chart.

Mfg. No.	Order No.	Pipe Size In.
CS-176B	ATW176B	3-10



Chipping Hammers Welders'



One end with 1-1/4" back beveled blade; other end tapered to point. Flame-treated hickory handle. Sure-Lock® wedged in tapered adze eye.

Mfg. No.	Order No.	Head Wt. Oz.	Lgth. In.
185-10/WC12	VHN18510	12	11-1/4



Welders' Pliers



Spring loaded, carbon steel construction specially coated for rust prevention. XLT™ technology designed to require less force for easy cuts. Groove nose design for spatter removal.

Mfg. No.	Order No.	Jaw Lgth. In.	OAL In.
360	CHL360	2-3/4	9



Tomahawk Chisels



Mill certified forging grade steel for head strength and durability. Overall length 10" with steel coil grip. Head length 6". Black oxide finish on heads and shafts will not chip, peel, flake or contaminate the weld.

Mfg. No.	Order No.	Head Type
S-20	ATWS20	Cone & chisel
S-30	ATWS30	Cone & cross chisel

Soapstones



ATW1



ATW2

Soapstone Holders

Mfg. No.	Order No.	Desc.
AT-SSF500	ATW1	Flat
AT-900SSH	ATW2	Round



ATW1100



ATW1200

Replacement Soapstones

Mfg. No.	Order No.	Desc.	Size In.
AT-FSS	ATW1100	Flat	5 x 1/2 x 3/16
AT-RSS	ATW1200	Round	5 x 1/4



Welding Coats



Split cowhide leather tanned with Heatshield™ fire retardant. Kevlar® double-stitched seams, riveted stress points and adjustable neck strap. Raglan shoulder design. 30" length.

Mfg. No.	Order No.	Size
6030 MEDIUM	MJC6030M	Medium
6030 LARGE	MJC6030L	Large
6030 X-LARGE	MJC6030XL	X-Large
6030/X2	MJC60302XL	2X-Large
6030/X3	MJC60303XL	3X-Large

Welding Aprons Split-Leg



Split cowhide construction; tanned with Heatshield™ fire retardant. Front pocket, quick-release buckles and adjustable sizing straps. Kevlar® stitching.

Mfg. No.	Order No.	Lgth. In.
6142	MJC6142	42

Welding Aprons Bibs



Side split cowhide construction, tanned with Heatshield™ and stitched with Kevlar®. Front pocket. Slide adjusting web apron straps and two waist D-rings.

Mfg. No.	Order No.	Lgth. In.
6141	MJC6141	36

CONSTRUCTION EQUIPMENT



Welding Gloves



Side-split leather construction treated with Heatshield™ fire-retardant. One-piece back with semi-straight thumb. Two rows of elastic provide snug fit for gloves to be quickly discarded when necessary. Padded, flame-retardant lining in back and palm. Self-rolled hem. Kevlar® stitching.

Mfg. No.	Order No.	Size
2100 LARGE	MJC2100L	Large
2100 X-LARGE	MJC2100XL	X-Large

Welding Gloves Clute Cut



For TIG welding applications. Features grain goatskin construction with straight thumb, thumb strap and split gauntlet cuff.

Mfg. No.	Order No.	Size
3504G MEDIUM	MJC3504GM	Medium
3504G LARGE	MJC3504GL	Large
3504G X-LARGE	MJC3504GXL	X-Large



Welding Gloves Blue Chip



Heat-resistant No. 1 Grade PLM weight split cowhide leather. Double-closed construction. Fully-lined with 9-oz. Jersey palm, back, and thumb. Midnight blue palm. Maize gauntlet and thumb with glove stiffener inside wide cuff. Stress points leather welted. Gunn cut with wing thumb.

Mfg. No.	Order No.	Lgth. In.	Size
AT-100BCG	ATW100BCG	14	Large



Welding Gloves



Split leather construction with heat and cut resistant Kevlar® thread and welted seams. Fully lined. Gunn-cut design with reinforced wing thumb strap for excellent abrasion resistance and longer wear. Durable one-piece back with gauntlet cuff for forearm protection.

Mfg. No.	Order No.	Size
4096	BOS4096	Large



Welding Gloves



Made of select shoulder leather with one-piece back and traditional wing thumb. Fully lined. Rust color.

Mfg. No.	Order No.	Size
2514A	MJC2514A	Large



Welding Caps



100% cotton. Steep bill provides maximum protection. High crown design. Reversible; various colors and patterns.

Mfg. No.	Order No.	Size In.
770014	HOB770014	7-1/8
770015	HOB770015	7-1/4
770016	HOB770016	7-3/8
770017	HOB770017	7-1/2



"Black ASP" Welding Helmets Auto Darkening



High heat, high impact nylon construction. Extra lightweight. 180° ADF holder lens and lens anchor set. 23 sq. in. viewing area. Fixed shade 3/10. 9-point adjustable halo headgear with replaceable absorbent headband. ANSI approved.

Mfg. No.	Order No.	Desc.
BLACK ASP	SPH01005	"Black ASP" Design

"Black Asp" Replacement Lens Covers



Front cover replacement lens for the "Black Asp" welding helmet. Protects from scratches and spatter. Clear.

Mfg. No.	Order No.	Qty.
816453010691	SPH01069	5

"Dead King" Welding Helmets Auto-Darkening



Two sensor auto-darkening adjustable 3/9-13 filter. 180° welding lens with 2 sensor high quality ADF grind, sensitivity, delay controls, low battery warning, and grind flash indicator. Approved for overhead welding.

Mfg. No.	Order No.	Desc.
3011629	SPH01162	Dead King

CONSTRUCTION EQUIPMENT



SAVE PHACE Welding Helmets Murda Out 2



4"x4" ADF integrated into a 180° welding lens. Protective lens change system. Articulating multi point adjustable halo headgear. Cheater lens compatible. Weighs about 23 oz. ADF features: internal adjustments, 2 sensor, fully automatic, grind mode, sensitivity, delay controls, grind flash indicator, low battery warning. High heat nylon!

Mfg. No.	Order No.	Desc.
RFP M02	SPH01161	"Murda Out" Design
RFP FLEX FIT	SPH01158	Clear Lense Cover

Grinding Helmets Metal Hed



Face protector with clear grinding lens. 180° lens design for ear-to-ear vision. High heat, high impact, lightweight nylon. Face forming profile, headgear adjustments to move helmet closer or further from face. Comes with clear lens. Can be replaced with #3, 5, 10 or 12 welding lens.

Mfg. No.	Order No.	Desc.
816453010738	SPH01073	"Metal Hed" Design



Welding Helmets Auto Darkening



Injection molded helmet, high/low sensitivity adjustment, shade control from DIN9 to DIN13, darkens in 1/20,000 of a second. View area 3.86" x 1.57". Tilt and headband adjust with ratcheting knobs. Working temperature: 23-131°F.

Mfg. No.	Order No.	Desc.
W50057	WIM02428	Welding helmet



by Honeywell

Welding Helmets Superglas®



Designed for pipe welding applications. Molded from moisture and impact-resistant Superglas® Plus. Compact design for tight operating conditions. Constant-fit rubber headband for frequent re-adjustments. White. Filter plate sold separately.

Mfg. No.	Order No.	Desc.
110-P-WE	FIB110P	Pipe welder's helmet

Welding Helmets Passive




Welding helmets are molded out of Noryl a tough weight-to-strength, heat resistant thermoplastic. Offers increased protection coverage to the neck and throat against welding arc and blocks welding fumes from creeping inside. Also allows room to accommodate a respirator when needed.

Mfg. No.	Order No.	Lens Shade
5906GY	FIB5906GY	10
906GY	FIB906GY	Flip Front



by Honeywell

Welding Helmet Plates Polycarbonate



Omni-View Filters. Abrasion-resistant. Gold coated to reflect up to 99% of infrared light; keeps inside of helmet cooler.

Safety Plates. Injection molded, impact-resistant.

Mfg. No.	Order No.	Height In.	Width In.	Shade
Omni-View Filters				
P-248-5	FIBP2485	2	4-1/4	5
P-452	FIBP452	4-1/2	5-1/4	Clear
P-458-10	FIBP45810	4-1/2	5-1/4	10
Safety Plates				
CL-242	FIBCL242	2	4-1/4	Clear
P241SH10	FIB241SH10	2	4-1/2	10
P241SH5	FIB241SH5	2	4-1/2	5
Gold Plated Filters				
P-248-10	FIBP24810	2	4-1/4	10
P-248-11	FIBP24811	2	4-1/4	10



Torch Kits Self Lighting w/ Tool Bag



Durable Tool Bag, Self-lighting PL-3T Tip. Ergonomic torch handle. STK-R Regulator (CGA-600) and much more.

Mfg. No.	Order No.	Weight
PLDXPT	TBTPDLXPT	6 Pounds

CONSTRUCTION EQUIPMENT

TurboTorch®

Torch Kits Acetylene — Pro Line™



Rear valve handle design. Features self-igniting trigger, quick-disconnect handle, color-coded O-rings for gas identification and replaceable tip. Includes AR-B regulator, G4 handle, AH-12 hose, PL-12A tip and instructions. "B" tank connections.

Mfg. No.	Order No.	Soft Solder In.	Silver Braze In.
0386-0835	TBT0835	3-1/2	2

Self-Lighting Torch Kits Pro-Line™



Swirl propane, MAP/PRO, MAP-Pro. Includes RL-P regulator CGA-510, H-4 handle, H-12 hose, PL-4T tip, soft solders 1-1/2" (40mm), silver brazes 3/4" (20mm) and instruction manual. Tank not included.

Mfg. No.	Order No.	Desc.
TBT0386-0838	TBTPL4T	Torch kit

Torch Tips Air — Acetylene



Features removable orifice screw and red color coded O-ring.

Mfg. No.	Order No.	Desc.
03860104	TBT0104	A-11

TurboTorch®

Torch Tips



For use with MAP/PRO gas and propane. Color-coded O-rings.

Mfg No.	Order No.	Tip Sz. In.	Gas Flow Lbs./Hr.	
			@ 24 PSI	@ 36 PSI
0386-0150	TBTT2	5/16	.14	.17
0386-0151	TBTT3	7/16	.20	.25
0386-0152	TBTT4	1/2	.39	.48
0386-0153	TBTT5	3/4	1.10	1.30
0386-0154	TBTT6	1	2.10	2.50

Torch Handles



Ergonomic design with rear valve and quick disconnect. Fits all Turbo Torch tips.

Mfg. No.	Order No.	Hose Connections
0386-0300	TBTH4	B-size 9/16"-18

Propane Hoses



T-grade hose fits H-4 handle, T-8 torch, R-LP adjustable regulator.

Mfg. No.	Order No.	ID In.	Lgth. Ft.	Thread
1412-0080	TBTH12	3/16	12	9/16"-18 LH

TurboTorch®

Adjustable Regulators



Brass construction. For use with MAP/PRO® gas, propane and other low-pressure fuel gases. Adjustable up to 60 PSI. Fits POL valve and 9/16"-18 LH hose nut.

Note: Not for use with acetylene.

Mfg. No.	Order No.	Desc.
0386-0705	TBTRLP	Adjustable brass regulator



Propane Torches Propane/MAP/PRO



On demand trigger for instant on/off. Delivers strong swirl flame. Adjustable flame knob. Replaceable burn tube assembly. Brass burn tip and 360° swivel. Auto igniter lock for continuous flame. Regulator for consistent flame. For use with MAP/PRO or propane fuel.

Mfg. No.	Order No.	Desc.
MT579C	MT057903	Self-lighting Torch

Torch Heads Propane/MAP/PRO



Self-lighting, brass burner tip, magnesium handle, lightweight and durable. Silver swirl combustion tip resists flame blowout and reduces brazing time. Use with MAP/PRO or Propane fuel.

Mfg. No.	Order No.	Desc.
MT565C	MT056503	Self-Lighting

CONSTRUCTION EQUIPMENT

MagTorch

Propane Torches Self Lighting



Regulated, self-lighting propane torch with stainless steel burn tube. Regulated valve for consistent triple point flame. Auto igniter for instant flame. Delivers strong triple point flame. Fuel control knob provides control and economy. Use with propane only.

Mfg. No.	Order No.	Desc.
MT535C	MT053503	Self-lighting Torch

Torch Heads Pencil Flame



Brass pencil tip burner with replaceable orifice, adjustable flame knob for control and economy. Solid brass valve body for durability. Use with MAP/PRO or propane fuel.

Mfg. No.	Order No.	Desc.
MT245C	MT024503	Pencil Flame

Torch Kits Propane — Pencil Flame



Brass, pencil tip flame torch. Adjustable flame knob for economy and control. Concentrated flame for pinpoint heating. Includes 14.1 Oz. disposable propane cylinder. For use in soldering pipe, soft solder, and thawing pipes. Removes paint, tile, and putty. Can be used for pilot lights and grills. Use with propane fuel only.

Mfg. No.	Order No.	Desc.
MT200-3	MT020000	2-Pc Torch Kit

MagTorch

Torch Kits Propane



Self light torch with brass valve torch kit. Stainless steel burn tube delivers triple point flame for high heat, 360 degree swivel burn tube, all brass valve with brass control knob. Fuel control knob allows for easy on/off.

Mfg. No.	Order No.	Desc.
MT521-3	MT052100	2-Pc Torch Kit

Propane Torches Self-Lighting



Regulated, self-lighting, propane torch kit, auto igniter, triple point flame, stainless steel burner tube, adjustable flame knob, ergonomic handle. Regulator valve. Use with propane fuel only. Includes 14.1 Oz propane cylinder.

Mfg. No.	Order No.	Desc.
MT535CK	TBTLPI	2-Pc Torch Kit

Butane Torches Self-Igniting — Microtorch



Micro Butane Torch is a 3-in-1 self-lighting, refillable butane torch, precision flame tip, a hot blow tip, and a solder tip. Comes with a protective safety cap and a built in stand, fuel adjustment, and fuel On/Off switch.

Mfg. No.	Order No.	Dim. In. H x W x D
MT765C	MT076503	5.8 x 1.5 x 1

MASTER

Butane Torch Kits Butane — Self-Igniting



Features 4-in-1 butane powered soldering iron, torch, hot knife, and flame-less heat tool. Use to heat parts, ignite materials, melt plastic, pinpoint torch, shrink tubing, solder & desolder, terminate specialty connectors and more. Gas adjustment wheel for temperatures up to 2,500°F/1300°C. Microtorch kit includes Triggertorch™, removable stand, 5" wire cutter, 5" needle nose pliers, solder tip, heat tip, shrink attachment, polyfoam cutter, hot knife tip, roll 60/40 solder, and stand with sponge in durable plastic case.

Mfg. No.	Order No.	Dim. In. H x W x D	Flame Temp. °F
MT-76K	MTR11506	6.5 x 3.8 x 1.3	2500

Butane Torches Self-Igniting — Microtorch



For soldering/de-soldering, connector termination, heat-shrink and other applications. Features ignition safety lock, adjustable flame (broad or pinpoint), wide base for tabletop applications, and built-in refillable plastic fuel tank. 2-hour runtime. CSA certified.

Mfg. No.	Order No.	Dim. In. H x W x D	Flame Temp. °F
MT-51	MTR11500	6.1 x 3.0 x 1.3	2500

www.aih.com

AIH ORDER DESK 907.276.7201 • 1-800-478-7201



**ALASKA INDUSTRIAL
HARDWARE**
A BSNC
COMPANY

CONSTRUCTION EQUIPMENT

BERNZOMATIC Fuel Cylinders Propane — MAP/PRO



BZ010182



BZ003116

Propane Fuel Cylinders

Mfg. No.	Order No.	Desc.	Size Oz.
305558	BZ010182	Propane	14.1
2880062	BZ003116	Fat Boy™ Propane	16.9



MAP/Pro Gas Fuel Cylinders

Mfg. No.	Order No.	Desc.	Size Oz.
308432	BZ032477	Map Pro™ gas	14.1

MagTorch Butane Cylinders Master Ultratane™



Refined, non-clogging formula. Single-piece universal tip. Non-ozone depleting. Contains no CFC's.

Mfg. No.	Order No.	Size Oz.
BF9	BZ0BF55	5-1/8

Butane Torches Microtorch



Refillable Butane Pocket Torch, Adjustable Flame Safety lock and cap. Key chain ring attached to torch.

Mfg. No.	Order No.	Desc.
MT16	MT016000	Pocket Torch

MASTER Plastic Welding Kits Master Proheat®



Self-contained, general purpose plastic welding system. Efficiently hot air weld thermoplastics such as ridged and flexible plastics, auto bumpers, tarps, liners, covers, tents, and inflatables. Includes electric heat gun, five tips for specific welding such as speed, pendulum, mirror, and tack welding, and 30 assorted rods.

Mfg. No.	Order No.	Desc.
PH-1400WK	MTR11759	Plastic welding kit

Plastic Welding Rods Master Proheat®



Round 1/8" x 9" rods for welding plastics. 16 per package.

Mfg. No.	Order No.	Plastic Type	Color
35298	MTR35298	Polypropylene	Natural
35299	MTR35299	PVC	Grey
35300	MTR35300	LDPE	Grey
35301	MTR35301	HDPE	Black

CONSTRUCTION EQUIPMENT

Weller®

Soldering Gun Kits Weller® — Professional



8200 dual heat soldering gun, coil of 60/40 lead-free solder, soldering tip, smoothing tip, cutting tip, flux brush and soldering aid tool. Rugged plastic case. 120V, 50/60 Hz. UL and CUL listed.

Mfg. No.	Order No.	Watts
8200PK/14433	WEL14433	140/100

Soldering Gun Kits Weller® — Lightweight



Includes 7200 soldering gun, coil of lead-free solder and two soldering tips. 120V, 50/60 Hz. UL and CUL Listed.

Mfg. No.	Order No.	Watts
7200PK/47880	WEL47880	75

Soldering Gun Kits Weller® — Professional



Includes D550 soldering gun, coil of lead-free solder, soldering tip, smoothing tip, cutting tip, flux brush and soldering aid tool. 120V, 50/60 Hz. Rugged plastic case. UL and CUL Listed.

Mfg. No.	Order No.	Watts
D550PK	WEL47542	260/200

Weller®

Soldering Tools Portasol®



Cordless, refillable butane fuel tank holds gas for 90 minutes. Flint-spark ignitor in cap. Catalytic converter for flameless operation. Safety switch cuts off gas when cap replaced. Adjustable temperature varies power equivalent to 25-75W.

Mfg. No.	Order No.	Max. Temp. °F
P-2-C	WEL16938	850

Copper Soldering Tips Weller®



WEL47565



WEL47571

Mfg. No.	Order No.	Desc.	For Model
7135W/47565	WEL47565	2 Soldering Tips	8200
7250W/47571	WEL47571	2 Soldering Tips	D550

Soldering Irons Battery-Powered



Heats up to working temperature under 15 seconds. Dual power (hi/lo) indicated by red and green LEDs with white LED light to illuminate working surface. Safety cap turns off power when placed on tool. Includes iron, cap, four AA batteries, lead free solder and tip wrench.

Mfg. No.	Order No.	Watts	Max. Temp. °F
BP865MP	WEL27444	6/8	710/900

TSURUMI PUMP

Submersible Pumps General Purpose



A powerful dewatering pump built with durable materials in an easy to handle design. With top discharge capability for maximum motor cooling efficiency, allowing continuous duty operation at low water levels and extended dry-run capability. Features: Designed to fit in an 8" pipe; Up to 60 ft. head; Oil lifter provides lubrication of the seal faces.

Mfg. No.	Order No.	GPH	Max Water Temp °F	Motor HP
LB-800	TSULB800	4380	104	1

Submersible Pumps Semi-Vortex



Features continuous-duty air-filled copper wound motor with agitator and urethane rubber impeller. Built-in thermal overload protection, double inside seals, double-shielded and permanently lubricated ball bearings. Class B insulation. Suitable for residential or commercial dewatering, site drainage, decorative fountains or sediment removal from basins. Can also be used with raw water supply from lake or river.

Mfg. No.	Order No.	GPH	Max. Water Temp. °F	Motor RPM	HP
HS2.	TSUHS24S62	3000	104	3600	1/2

4S-62

CONSTRUCTION EQUIPMENT

LittleGIANT[®] Sump Pumps Big John Pump[®] — Submersible



LTG508157
Epoxy coated cast iron housing and oil-filled motor housing. For extended use in pumping large volumes of water. Discharge 1-1/2" FNPT. 115V AC, 50/60 Hz motor with 10' power cord. UL Listed. CSA Certified. Includes 1-1/4" FNPT adapter. Automatic operation with diaphragm switch (switch on 7"-10", switch off 1"-4"). 10A, 4/10 HP shaded pole motor.

Mfg. No.	Order No.	GPH	Max. Head Ft.
508157/8-CIA	LTG508157	3240	22.9

Sump Pumps



Heavy-duty Epoxy-Coated Cast Iron construction, including Base, Permanent split capacitor (PSC) motor with thermal overload protection. Designed for continuous duty. Energy-saving low amp draw.

Mfg. No.	Order No.	Desc.
510851	LTG510851	AUTO

LittleGIANT[®] Submersible Pumps Water Wizard[®]



Epoxy coated cast aluminum housing and stainless steel shaft. Discharge 1" FNPT. Max. head 26.3 ft. Pumps down to 1/8". Electric 5A, 1/6 HP shaded pole 60 Hz motor with 10 ft. power cord. Manual operation. UL Listed.

Mfg. No.	Order No.	GPH	AC Volts
505000/5-MSP	LTG505000	1200	115

WAYNE[®] Sump Pumps Submersible



Durable impact and corrosion resistant housing. Designed to be used in continuous duty applications such as draining flooded basements, sinks, tubs, or emptying water from filled boats. Oil-less motor with thermal-overload protection is constructed to be environmentally safe.

Mfg. No.	Order No.	GPH	HP
RUP160	WAYRUP160	3000	1/6

WAYNE[®] Sump Pumps Submersible



Durable cast iron housing and ceramic seal for long life and quiet operation. Features overload protection to keep the motor from overheating and top suction strainer to virtually eliminate clogs. Thermoplastic top assembly will not rust or corrode.

Mfg. No.	Order No.	GPH	HP
CDU790	WAYCDU790	3800	1/3

LittleGIANT[®] Sump Pump Systems Crawl Space



1/3 HP, cast iron pump with overload protection used for low lying areas needing drainage. Features integral snap action float. 18" x 22" lightweight perforated polypropylene basin. Structural foam cover with flip fit flanges. Includes: 1-1/4" x 24' discharge hose kit and 1-1/2" MNPT x 1-1/4" barbed check valve. 22' shut off. Handles 1/2" solids.

Mfg. No.	Order No.	GPM	Volts
CS-SS/14940655	LTGCCSS	50	115

CONSTRUCTION EQUIPMENT

Little GIANT® Submersible Pumps



For home or industrial use in transfer or recirculation of liquid. Suitable for aquariums, swimming pools and fuel oil transfer. Glass-filled nylon housing, cover and screen. Oil-filled motor housing. Discharge 1/4" MNPT. Max. head 4.6' 0.5A, 30W, 60 Hz motor with 6' power cord. UL Listed.

Mfg. No.	Order No.	GPH	AC Volts
523003/P-AAA	LTG523003	120	115

Transfer Pump Kits 115 Volt



Polypropylene housing. PP-1 pump with dual threaded 3/8" FNPT and 3/4" GHT intake and discharge. 1/10 HP motor with thermally protected three-prong 6' power cord. Manual, intermittent-duty operation. Includes two 10 ft. hoses with vacuum/screen attachment for inlet hose. UL Listed. CSA Certified.

Mfg. No.	Order No.	GPH	AC Volts
555111/360K	LTG555111	300	115

Transfer Pump Kits 12 Volt



Polypropylene housing. PP-12 pump with dual threaded 3/8" FNPT and 3/4" GHT intake and discharge. Battery-operated 1/10 HP motor. Manual, intermittent duty operation. Includes 6' battery wires and two 10' hoses with vacuum/screen attachment for inlet hose. UL Listed. CSA Certified.

Mfg. No.	Order No.	GPH	DC Volts
555602/365	LTG555602	240	12

Little GIANT® Transfer Pumps Non-Submersible



Self-priming utility pump designed to lift water up to 25'. Corrosion resistant stainless steel pump housing. Heavy-duty 3/4 hp 115 Volt motor. Glass-filled thermoplastic impeller and diffuser.

Mfg. No.	Order No.	GPH	AC Volts
614432	LTG614432	1,020	115

Utility Pumps Water



Connects to a standard electric drill. Convenient 3/4" garden hose connections on the intake and discharge. This small, self-priming utility pump can be used to drain sinks, tanks, aquariums, and small pools.

Mfg. No.	Order No.	GPH
14942003/MPDP	LTG11802	2160

Discharge Adapters Garden Hose



Mfg. No.	Order No.	Desc.
599025/GH-1	LTG599030	1" MNPT x 3/4" GHT
599025/GH-3/4	LTG599025	1-1/4" MNPT x 3/4" GHT

Pump Accessory Kits Potent®



Includes replacement impeller, cam and gasket.

Mfg. No.	Order No.	For Pump Model
555702/SRK3622	LTG555702	PP-1

Little GIANT® Remote Switches



In-line control system for automatically controlling wastewater, effluent, and sewage pumps. Float switch consists of one float, a cord with piggyback plug, one large mounting strap, and two small adjustable mounting clamps. Convert 1/2HP-1HP manual pumps to an automatic pump.

Mfg. No.	Order No.	Desc.
RFSN-9	LTG599117	Float switch for manual pumps

Diaphragm Switches Piggyback — Low Level



Converts manual pump to automatic (up to 1/3 hp, 10A). Standard switch on 2" to 3", switch off 1/2" to 1-1/2" when mounted to 5-MSP pump. Includes 18' power cord. UL Listed. CSA Certified.

Mfg. No.	Order No.	AC Volts
599008/RS-5	LTG599008	115

Jet Pump Tank Systems Convertible



Features 2805E pump which converts from shallow well (25 ft. depth or less) to deep well pump (up to 110 ft.) with addition of optional deep well injector (requires Model M D W C conversion kit); shallow well injector factory-installed. Continuous duty square flanged NEMA motor rated 1/2 HP; 115V; 3,450 RPM. Switch has 20/40 PSI setting. Includes 7 gal. pre-charged bladder type tank (18 PSI pre-charge, 15 gal. equivalent). Tank drawdown 2.5 gal. usable water. UL and CUL Listed.

Mfg. No.	Order No.	Desc.
602102/602099	LTG11900	Jet pump tank system

CONSTRUCTION EQUIPMENT

LittleGIANT®

Jet Pumps Carefree® — Convertible



Cast iron pump housing with motor bracket, stainless steel motor shaft and 5/8" ceramic mechanical shaft seal. Suction

1-1/4", discharge 1" with 4-1/2" in between. Fast priming; quick start. Converts from shallow well (25 ft. depth or less) to deep well pump (up to 100 ft.) with addition of optional deep well injector (requires Model MDWC conversion kit); shallow well injector factory-installed. Continuous duty square flanged NEMA motor rated 1/2 HP; 115V; 3,450 RPM. Adjustable pressure switch 20-40 PSI. Discharges 13 GPM at 20 PSI and 5 ft. water depth. UL and CUL Listed.

Mfg. No.	Order No.	Max. PSI	Max. Amps
602006	LTG11963	54*	8
*Max. 47 PSI with optional MDWE24 injector; 49 PSI with MDWE25 injector.			

Transfer Pumps Non-Submersible



For draining flooded basements or water heaters, watering lawns or boosting water pressure in other applications. Portable design features cast iron housing with built-in carrying handle, carbon/ceramic shaft seal, and 3/4" brass

garden hose fittings for intake and discharge lines. Self-priming to 15 ft.

Mfg. No.	Order No.	GPH	Max. Head Ft.	Volts
555101/UPSP-5	LTG555101	1140	112	115
* With 20-ft. of head.				



1" Water Pumps Centrifugal



98cc PowerEase engine with 0.5 gal. fuel capacity. Centrifugal aluminum pump with heavy duty aluminum impeller. Recoil start and low oil shutdown. 1" intake and outlet connection MNPT. 85' total lift and 20' suction lift.

Mfg. No.	Order No.	HP	Max. GPH
WP-1020R	BEPWP1020R	2.5	2520



2" Water Pumps



210cc PowerEase engine with 0.95 gal. capacity. Centrifugal aluminum pump with heavy duty cast iron impeller. Recoil start and low oil shutdown. 2" intake and outlet connection MNPT. 82' total lift and 26' suction lift.

Mfg. No.	Order No.	HP	Max. GPH
WP2070S	BEPWP2070	7	9480

2" Fire Fighting Kits



INCLUDES



Centrifugal aluminum pump with 210cc Powerease engine generates 80 PSI of pressure. Features recoil start and aluminum impeller. 0.95-gallon fuel tank capacity. 2" intake connection MNPT and outlet connection MNPT. 197' total lift and 26' suction lift. Includes 1-1/2" x 50' fire hose, 2" x 12' suction hose, fog/stream fire nozzle, fittings and foot valve.

Mfg. No.	Order No.	HP	GPH
HPFK-2070R	BEP16622	7	7560

2" Water Pumps




GC160 160cc Honda engine with 0.5 gal. fuel tank capacity. Recoil start. Centrifugal aluminum pump with heavy duty cast iron impeller. 2" intake and outlet connection MNPT. 82' total lift and 26' suction lift.

Mfg. No.	Order No.	HP	Max. GPH
WP-2050HL	BEPWP2050	5	9480



3" Water Pumps

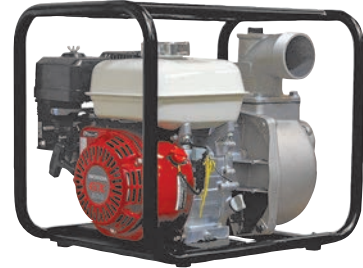

GX200 196cc Honda engine with 0.82 gal. fuel tank capacity. Recoil start and low oil alert. Centrifugal aluminum pump with heavy duty cast iron impeller. 3" intake and outlet connection MNPT. 85' total lift and 26' suction lift.

Mfg. No.	Order No.	HP	Max. GPH
WP-3065HL	BEPWP3065	6.5	15,840

3" Trash Pumps



GX390 389cc Honda engine with 1.8 gal. fuel tank capacity. Recoil start and low oil alert. 3" intake and outlet connection MNPT will move up to 1" solids. 98' total lift and 26' suction lift.

Mfg. No.	Order No.	HP	Max. GPH
TP-3013HM	BEPTP3013	13	17,160

4" Trash Pumps



GX390 389cc Honda engine with 1.8 gal. fuel tank capacity. Recoil start and low oil alert. 4" intake and outlet connection MNPT will move up 1" solids. 95' total lift and 26' suction lift.

Mfg. No.	Order No.	HP	Max. GPH
TP-4013HM	BEPTP4013	13	30,360



CONSTRUCTION EQUIPMENT



Water Pumps Centrifugal



For moving large volumes of water. 210cc Powerease engine with recoil start and low oil shutdown. Heavy duty cast iron impeller and centrifugal aluminum pump. 3" MNPT intake and 3" outlet connection. 85' total lift and 26' suction lift.

Mfg. No.	Order No.	HP	Max. GPH
WP-3070S	BEPWP3070	7	15,840

Fire Fighting Carts



210cc Powerease Engine, Recoil Start & Low Oil Shutdown, Fuel tank capacity is 0.95 gal. Comes with a 12' (2") suction hose and a 50' (1.5") discharge hose. 126 GPM max flow, centrifugal aluminum pump, and a heavy duty aluminum impeller. Has 197' total lift and 26' suction lift.

Mfg. No.	Order No.	HP	GPM
HPFC-2070R	BEP17136	7	126



Hose Pump Kits 2"



Abbott Rubber 2" Pump Kit Complete with Suction and Discharge Hose With Fittings and Strainer and Pump Adapter.

Mfg. No.	Order No.	Desc.
1246-KIT-2000	HPS48838	Kit

Discharge Hoses



A premium water discharge hose using PVC tube and cover to prevent separation. Used for general purpose water discharge applications and ideal for use as a drip irrigation supply line. Smooth tubing provides low friction loss and lies straight with minimal elongation under pressure. Hose may be punched easily without tearing for drip irrigation applications. Ultraviolet inhibitors reduce the aging and weathering process.

Mfg. No.	Order No.	Dia. In.	Lgth. Ft.	End Fittings
PVCD1x50K	HPS150D	1	50	M x Fm Threads
PVCD11/2X25G	HPS11225D	1-1/2	25	M x Fm Threads
PVCD2X25G	HPS225D	2	25	M x Fm Threads
PVCD2X100	HPS2100D	2	100	M x Fm Threads
PVCD3X50G	HPS350D	3	50	M x Fm Threads
PVCD4X50G	HPS450D	4	50	M x Fm Threads

Fogger Nozzles Plastic



This nozzle fog features thermoplastic, adjustable pattern with shut off. Adjusts from straight stream to fog. Steel/Plastic Stem, 2-inch Npt Thread Inlet - High Flow Design.

Mfg. No.	Order No.	Size In.
JAHN-200	HPSJAHN	2



Fog Nozzles



Thermoplastic construction with brass stem. Adjusts from stream to fog. Includes bumper. Note: For use with water only.

Mfg. No.	Order No.	Thread In. NPT	Max. PSI	GPM @ 100 PSI*
FNB150S	HPSNB150	1-1/2	100	83.6

* 90° spray.

Hose Nozzles Plain



Thermoplastic construction. Red finish.

Mfg. No.	Order No.	Thread In. NPS	Lgth. In.	Orifice In.
PN15	HPSPN15	1-1/2	10	1/2



Quick Disconnect Adapters Aluminum



Male coupler x FTP **Male coupler x MTP**
Made of high quality aluminum. Used in a wide variety of applications for liquid and dry product transportation.

Mfg. No.	Order No.	Size In.	Type	Desc.
90.390.100	BEP13507	1	A Adapter	Male coupler x FPT
90.390.112	BEP13525	1-1/2	A Adapter	Male coupler x FPT
90.390.200	BEP13533	2	A Camlock	Male coupler x FPT
90.395.200	BEP13538	2	F Camlock	Male coupler x MPT
90.390.300	BEP13541	3	A Camlock	Male coupler x FPT
90.395.300	BEP13546	3	F Camlock	Male coupler x MPT

CONSTRUCTION EQUIPMENT



Quick Disconnect Couplers Aluminum



Type B Camlock

Type D Camlock

Used in a wide variety of applications for liquid and dry product transportation.

Mfg. No.	Order No.	Size In.	Type	Desc.
90.391.100	BEP13504	1	B	Female coupler x MPT
90.391.112	BEP13526	1-1/2	B	Female coupler x MPT
90.391.200	BEP13534	2	B	Female coupler x MPT
90.393.200	BEP13536	2	D	Female coupler x FPT
90.391.300	BEP13542	3	B	Female coupler x MPT
90.393.300	BEP13544	3	D	Female coupler x FPT



Strainers Plastic



Plastic strainer for centrifugal pumps. Made of sturdy black polyethylene.

Mfg. No.	Order No.	Desc.
TSS25	HPS43307	Pump strainer

Strainers Metal



Metal strainer for trash and diaphragm pumps.

Mfg. No.	Order No.	Size In.
RHS25	HPS54702A	2
RHS35	HPSRHS35	3
RHS40	HPSRHS40	4



Suction and Transfer Hoses Blue Water Multi-Purpose



For general water suction and transfer, construction, rental and mining, agriculture, irrigation lines and abrasive liquid applications. HMW PVC clear construction allows for visual confirmation that material is flowing. Smooth cover makes clamping easy. Blue helix provides easy identification. M X FM threaded end fittings.

Mfg. No.	Order No.	Dia. In.	Lgth. Ft.
PVCS1X10B	HPS110S	1	10
PVCS2X10B	HPS210S	2	10
PVCS3X20BW	HPS320S	3	20
PVCS4X20BW	HPS420S	4	20

With Quick Disconnect End Fittings

Mfg. No.	Order No.	Dia. In.	Lgth. Ft.
PVCS2X20BMF KAM	HPS220SQD	2	20
PVCD2X50MF KAM	HPS250DQD	2	50



Pressure Washers Cold Water



On/Off Foot Pedal. Connection points that prevent leaks and allow for easy changing between accessories. On-board storage. Smaller so it tucks away in closets, car trunks, shelves & other small spaces. Plugs into household outlets. 35 foot GFCI power cord lets you work in a wide area. 1.5 gallons per minute. Detachable detergent bottle, fill with your choice of chemical to mix into the water stream. Variable spray nozzle adjusts the water spray from wide to narrow to suit your needs.

Mfg. No.	Order No.	PSI	GPH	Volts
PW135002AV	CAMPW1350	1500	90	120



Pressure Washers Electric



Ideal for cleaning patios, decks, sidewalks, drives, cars, boats, and ATVs. Includes high pressure hose and reel, adjustable lance, and turbo nozzle.

Mfg. No.	Order No.	GPM	PSI
PW1835	CAMPW1835	1.65	1900



Pressure Washers



Honda GC160 engine with RX705 pump. Durable powder coated steel frame with 10" pneumatic tires. Includes spray gun, lance, 25' high pressure hose and soap container.

Mfg. No.	Order No.	HP	GPH	PSI
PE-2005HWX	BEPPE2005	5.5	138	2700

Pressure Washers PowerEase™



210cc PowerEase engine with RX705 pump. Powder coated steel frame with 10" pneumatic tires. Low oil shutdown. Includes spray gun, lance, chemical injector and 25' high pressure hose.

Mfg. No.	Order No.	HP	GPH	PSI
PE-3170RWX	BEPPE3170	7	138	3100



CONSTRUCTION EQUIPMENT



Pressure Washers Honda GX390



Powder coated steel frame. 13" pneumatic tires, pump takes 30W non-detergent oil and the engine takes 10W30 oil. Has a thermal valve and a low pressure chemical injector and a 3/4" keyed shaft.

Mfg. No.	Order No.	HP	GPH	PSI
B4213HC	BEPB4213HC	13	4	4200

Pressure Washers Cold Water



420cc PowerEase engine with WT706 pump. Powder coated steel frame with 13" pneumatic tires. Low oil shutdown. Includes spray gun, lance, chemical injector and 50' high pressure hose.

Mfg. No.	Order No.	HP	GPH	PSI
PE-4015RWPK	BEPPE4015	15	240	4000

Gas Engines PowerEase™



BEP14636

BEP14637

Pull start OHV 3400 RPM replacement motor. PowerEase™ gas engine with low oil alert.

Mfg. No.	Order No.	HP	CC Rating	Keyed Shaft Size In.
85.570.070	BEP14636	7	210	3/4
85.570.150	BEP14637	15	420	1



Replacement Pumps BE Pressure Washer



Commercial grade BE axial pump w/oil sight glass and oil drain plug. Includes quick-connect coupler, garden hose inlet, and chemical injector. Comes with built-in adjustable pressure un-loader. Fits 5-7 HP engines. Fits gas engine with 3/4" solid shaft.

Mfg. No.	Order No.	GPH	PSI
85 170 005B	BEP15072	150	3000



Pressure Washer Trailers



Hotsy offers an affordable trailer to provide mobile cleaning anywhere. 3,500 lbs. load rated Trail Blazer Trailer with swing away hinged tongue, 15" white spoke wheels, 2" ball coupler and recessed DOT approved lights and electric brakes. 200-gallon water tank features a float valve and 7" access port. Trailer is equipped with two hose reels; 150 ft. high pressure hose reel and a 100' garden hose reel. Gas powered, oil-fired.

Mfg. No.	Order No.	GPH	PSI
1080BE	HOTTRAILER	276	3500

Pressure Washers



Electric motor, direct-drive pump, oil-fired water heater and stainless steel coil skin combustion chamber for extra durability. Polyethylene fuel tank is rust-proof and non-contaminating. Hot water pressure washer for use in industrial applications. Includes 50 ft. hose and 37 ft. cord with GFCI plug. Note: Hose reel not included.

Mfg. No.	Order No.	PSI	Output GPH	HP	Volts AC
555SS	HOT555	1300	132	2	115



Pressure Washers Oil-Fired



Upright, oil-fired burner operates with diesel fuel, kerosene or home-heating oil. Includes adjustable temperature control plus heavy duty heater and pump motor switches. 230V Baldor electric motor comes with thermal overload protection and manual reset. Has a rustproof cross-linked polyethylene fuel tank. Easy belt adjust by turning single bolt. Features detergent injection, pneumatic tires, GFCI breaker, and float valve to help maintain constant pressure and flow. Traps sediment and debris. Pressure relief valve protects machine and user from thermal expansion. Seven year warranty on Hotsy Triplex pump.

Mfg. No.	Order No.	HP	GPH	PSI
795SS	HOT795SS	5	210	2000

Pressure Washers Gasoline



Gas powered machine features a Robin engine, 12V DC burner, Hotsy Triplex pump, direct-drive, pneumatic wheels and is portable and compact. Dimensions are 43" L x 27" W x 39" H. This machine is ETL safety certified and has standard pressure switch and 50 ft. hose. Seven year warranty on Hotsy Triplex pump.

Mfg. No.	Order No.	HP	GPH	PSI
871SS	HOT871SS	7	180	2400

CONSTRUCTION EQUIPMENT



Pressure Washers



Gasoline engine, direct-drive pump, oil-fired water heater with 12V burner, stainless steel combustion chamber. Use where 220V is not available. Features heavy-duty roll cage, lifting eye and 12" pneumatic tires. Includes 3/8" dia. wire braid hose.

Mfg. No.	Order No.	HP	GPH	PSI
1065SSE	HOT1065	11	210	3000

High-Pressure Hoses Tuff-Skin™



Oil-resistant tube and cover with black hose guard. 3/8" MPT swivel connections. Maximum pressure 4000 PSI. Maximum temperature 275°F.

Mfg. No.	Order No.	Lgth. Ft.
8.916-332.0	HOT8739016	50
8.916-336.0	HOT8739018	100



Pressure Hose Flexilla



Extreme flexibility under pressure, from subzero to 140 Degree F.

Mfg. No.	Order No.	PSI.
HFZPW3425M	LEG34250	3100



Detergents Industrial



Blue Thunder. Vehicle cleaner for removing exhaust deposits, road film, and bug residue. Use with cold water.

Carbon-ATE. Highly concentrated detergent for engine degreasing, parts cleaning, hard-to-clean vehicles, road film, carbon smoke trails and grease buildup. Hot or cold water use.

Ripper 1. Fast-acting, highly concentrated non-caustic cleaner for heavy equipment and trucks. For grease-clogged equipment and hard to remove road film.

Citrus Clean. Citrus-based detergent. Use as an additive to increase cleaning and degreasing action of detergents.

Tubmate. All-purpose detergent concentrate powder.

Breakthrough. All-purpose, effectively cleans crude oil, caked-on, buildup wheel grease, yet gentle enough for fine finishes.

Aero One. Aircraft cleaner for salt air, air pollution, and acid rain defense.

Mfg. No.	Order No.	Size
Blue Thunder		
1 GAL BLUE	HOTBLUE	1 Gal.
5 GAL BLUE THUN	HOT54053	5 Gal.
Carbon-ATE		
1 GAL CARBONATE	HOTCARB	1 Gal.
5 GAL CARBONATE	HOT51503	5 Gal.
Ripper 1		
1 GAL RIPPER	HOTRIP	1 Gal.
5 GAL RIPPER 1	HOT51653	5 Gal.
Citrus Clean		
1 GAL CITRUS	HOTCITRUS	1 Gal.
5 GAL CITRUS	HOT52103	5 Gal.
Breakthrough		
5GAL BREAKTHROU	HOT52653	5 Gal.



Hose Reels Power Washer



For use with power washer hoses. Steel pipe core. Mounts to most power washers. Interior plumbing constructed from schedule 80 steel pipe. Rated for 5000 PSI and 325°F

Mfg. No.	Order No.	Hose Cap. Ft.	Inlet Size In.
85.402.001K	BEP13210	100	3/8

Spray Guns Pressure Washer



Industrial spray gun 1/4" FNPT outlet and a 3/8" FNPT inlet.

Mfg. No.	Order No.	Max. PSI	Max. Flow GPM	Max Temp. F
85.202.108BEP	BEP12496	5000	8	210

Insulated Wands With Handle



Mfg. No.	Order No.	Lgth. In.
85.202.028	BEP14117	59

Pressure Washer Gun and Wand Assemblies



A complete replacement spray gun and wand assembly with industrial-grade spray gun, a 36" wand, and quick-connect fittings. For use with pressure washers up to 4000 PSI maximum pressure. Comes with 1/4" quick-connect coupler on lance and 3/8" quick connect plug on gun.

Mfg. No.	Order No.	Max Pressure PSI
85.205.026	BEP10005	4000



CONSTRUCTION EQUIPMENT



Pressure Washer Accessories Kit



The complete replacement accessory kit comes with a 25 ft. steel braided hose; a 36" split lance, and a variable nozzle, and has M22 screw-type fittings. Use with pressure washer up to 2950 PSI maximum pressure.

Mfg. No.	Order No.	Max Pressure PSI
85.400.327	BEP12538	2950

Hot Water Wands



Zytel insulated grips protect against heat. 1/4" plated steel pipe. 1/4" threads. 220°F maximum temperature. 3000 maximum PSI.

Mfg. No.	Order No.	Desc.	Lgth. In.
85.202.026	BEP10681	Wand w/ grip	36

Power Washer Wands Telescoping



Brass coupler and steel plug. 1/4" hose.

Mfg. No.	Order No.	Lgth. Ft.	Max. PSI	GPM
85.206.018	BEP71251	6-1/2 - 18	4000	8

Pressure Washer Wands Rain Gutter Cleaner



Turns wands into rain gutter cleaners. Gutters can be cleaned from the ground.

Mfg. No.	Order No.	PSI
85.400.007	BEP10154	4000

Sandblaster Kit



Removes paint and graffiti from wood, metal, and other surfaces. Sandblasts without dust and connects to most commercial or residential pressure washers.

Mfg. No.	Order No.	Max Pressure PSI	Max Flow GPM
85.400.002	BEP10044	3500	10



Water Brooms 16"



16" water broom for cleaning driveways, decks, sidewalks, and other large surfaces. Stainless steel construction for long-lasting durability. Comes with four nozzles and 1/4" quick-connect plug.

Mfg. No.	Order No.	Max Pressure PSI	Max Flow GPM
85.400.061	BEP10803	4000	3.0

Spray Nozzles Rotary



Circular spray produces scrubbing action to lift dirt. Strips paint, cleans concrete. Nozzle works with all pressure washers from 2000 to 5100 PSI. 1/4" quick-connect inlet.

Mfg. No.	Order No.	Orifice Size
85.210.020	BEP13163	.040

Fan Nozzles Adjustable – High/Low



Variable fan nozzle. Low pressure soap injection. 3000 PSI Max. 200°F Max. 1/4" inlet

Mfg. No.	Order No.	Orifice Size
85.210.002 BEP	BEP10997	2 – 3.4

Spray Nozzles GP — Quick-Connect



15° Angle Nozzle



40° Angle Nozzle

Hardened stainless steel construction. Fits most 1/4" quick couplers. Rated for 5000 PSI.

Mfg. No.	Order No.	Spray Angle	Orifice Size
85.216.035 BEP	BEP10947	15°	3.5
85.216.040 BEP	BEP10943	15°	4.0
85.216.045 BEP	BEP10944	15°	4.5
85.216.050 BEP	BEP11083	15°	5.0
85.216.055 BEP	BEP11082	15°	5.5
85.241.035 BEP	BEP10950	40°	3.5
85.241.040 BEP	BEP10627	40°	4.0
85.241.045 BEP	BEP10951	40°	4.5
85.241.050 BEP	BEP11081	40°	5.0
85.241.055 BEP	BEP11055	40°	5.5
85.216.090 BEP	BEP10703	15°	9.0
85.241.090 BEP	BEP10710	40°	9.0



Soaper Nozzles Quick-Connect



For use with pressure washers equipped with chemical injectors. Fits 1/4" quick-connect coupler.

Mfg. No.	Order No.	Spray Angle
85.266.400 BEP	BEP12235	40°

Spray Nozzles Quick-Connect



0°, 15°, 40°, and soaper quick-connect nozzle and 1/4" quick-connect inlet.

Mfg. No.	Order No.	Orifice Size	Pkg. Qty.
85.210.035 BEP	BEP11165	.035	4 Pc.
85.210.040 BEP	BEP10841	.040	4 Pc.
85.210.045 BEP	BEP10795	.045	4 Pc.

Quick-Connect Couplers



Quality brass construction. Maximum pressure 4000 PSI.

Mfg. No.	Order No.	Desc.
85.300.102 BEP	BEP10916	1/4" FNPT
85.300.103 BEP	BEP10918	3/8" FNPT
85.300.107 BEP	BEP10911	1/4" MNPT
85.300.108 BEP	BEP10915	3/8" MNPT

Pressure Washers Quick-Connect Couplers



BEP10908



BEP10922

Zinc plated steel construction. Maximum pressure 4000 PSI.

Mfg. No.	Order No.	Dia. In.	Type
85.300.101 BEP	BEP10908	1/4	FNPT
85.300.104 BEP	BEP10920	3/8	FNPT
85.300.105 BEP	BEP10922	3/8	MNPT
85.300.109 BEP	BEP10910	1/4	MNPT

CONSTRUCTION EQUIPMENT



Couplers



BEP10932

BEP10934

3/8" pipe thread x M22 screw type. Quality brass construction. Maximum pressure 4000 PSI.

Mfg. No.	Order No.	Type	End
85.300.127 BEP	BEP10932	FNPT	Brass
85.300.133 BEP	BEP10934	MNPT	Brass

Screw-Type Couplers



BEP10928

BEP10926

Quick connect. Insulated knob fits M22 x 1-1/2" thread size.

Mfg. No.	Order No.	Size
85.300.136 BEP	BEP10928	3/8" MNPT
85.300.125 BEP	BEP10926	3/8" FNPT

High Pressure Coupler Pivoting



Adjustable high pressure coupler for end of spray wands. Nozzle not included.

Mfg. No.	Order No.	Pivot Degree
85.300.172	BEP16657	90

Laser Nozzles Drain Cleaning



Allows you to effectively clear clogged drain pipes. Nozzle is built with one front jet and three rear facing jets.

Mfg. No.	Order No.	Thread Size In.
85.210.146 BEP	BEP27327	1/8



Pump Savers Anti-Freeze Solution



Protects pump from freezing while also preventing harmful build up of hard water mineral deposits. Solution assists in longer pump life and preserves seals and pistons. Bottle attaches to any pump inlet to fill pump chamber with anti-freeze solution.

Mfg. No.	Order No.	Desc.
85.490.046	BEP15195	Pump saver/winterizer solution

Pressure Washer Pump Oils Non-Detergent



Non-detergent and non-foaming. Specially formulated and rated for superior rust protection and oxidation protection. Not for use in engine.

Mfg. No.	Order No.	Size Qt.
85.490.000	BEP10533	1

