


NOTES:

(N1) 1. FIT / FORM / FUNCTION SHALL FOLLOW PS-E.008.


(N2) 2 WHEN TIGHTENING ITEM 12 IN ASSY
APPLY 70-80 LB-IN OF TORQUE

(N3) 3 TIGHTEN SETSCREW TO
7-8 LB-IN OF TORQUE

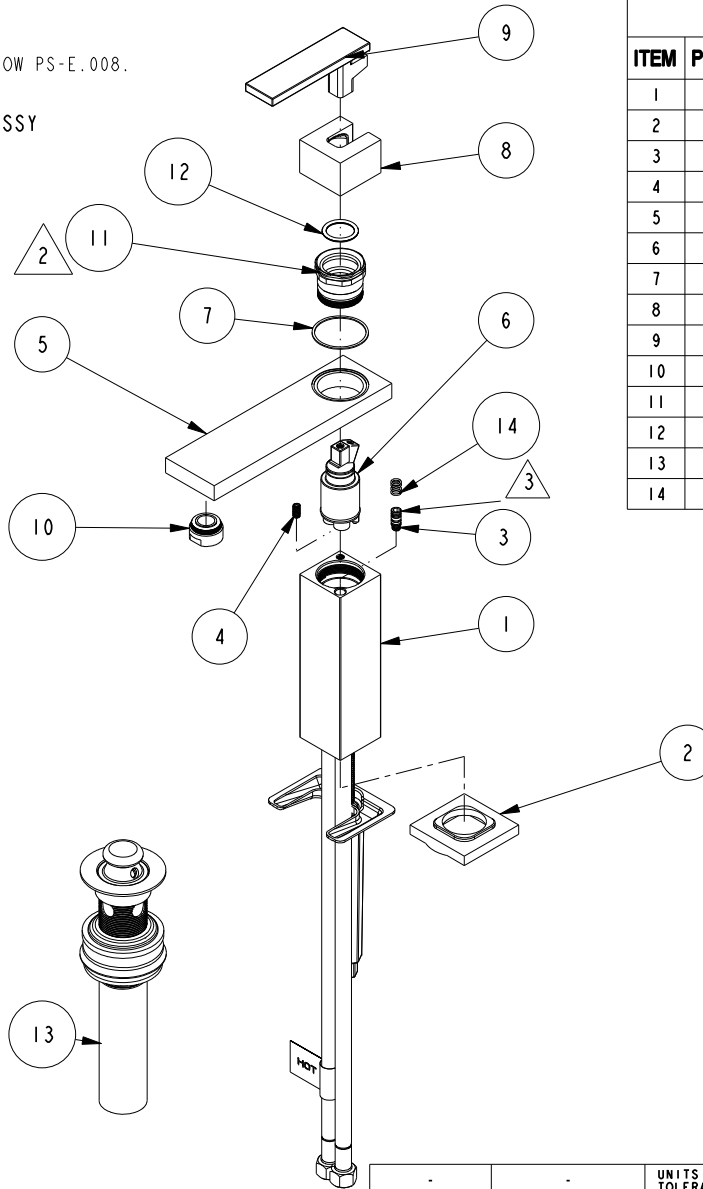

BILL OF MATERIAL (CURRENT LEVEL)

ITEM	PT/ASSY	DESCRIPTION	TYPE	QTY.
1	2-926	SPOUT BODY ASSEMBLY	ASSEMBLY	1
2	2-919	ESCUTHEON ASSEMBLY	ASSEMBLY	1
3	12226	WATERWAY CONNECTOR	PART	1
4	92025	SCRW, 10-24 X 3/8 SKT HD CUP PT SS	PART	1
5	2-918	SPOUT ASSEMBLY	ASSEMBLY	1
6	1-259	MIXING VALVE - FX25	ASSEMBLY	1
7	91633	WSHR, 1.34 ID X 1.5 OD X .032 THK, FLT, NYLON	PART	1
8	2-920	CAP ASSEMBLY	ASSEMBLY	1
9	2-921	HANDLE ASSEMBLY	ASSEMBLY	1
10	8-176	AERATOR ASM, 1.5 GPM	ASSEMBLY	1
11	1-296	RETAINER NUT ASSEMBLY	ASSEMBLY	1
12	91114	O-RING, #2- 116, EPDM, 65-75 DURO, NSF 61	PART	1
13	320	DRAIN - LIFT & TURN	ASSEMBLY	1
14	91675	O-RING, 1 X 5MM ID, EPDM, 65-75 DURO	PART	4



-	D	EN-2987	12/15/15	J.M.
-	C	EN-2870	04/08/15	J.M.
-	B	EN-2779	07/18/14	-
-	A	EN-2643	05/30/14	-
-	-	EN-2475	03/07/14	-
ZONE	REV	DESCRIPTION	DATE	APPROVED

COPYRIGHT 2005 BRASSTECH, INC.
THESE DRAWINGS AND THE DESIGNS
DEPICTED HEREIN ARE THE PROPRIETARY
PROPERTY OF BRASSTECH. ANY USE
OR REPRODUCTION IS SUBJECT TO
THE EXPRESS APPROVAL OF BRASSTECH.
UNAUTHORIZED USE IS STRICTLY
PROHIBITED. ALL RIGHTS RESERVED.

TESTING	-	-	-
ASSEMBLY	-		-
PLATING	-	-	-
POLISHING	-	NEXT ASSY	USED ON
MACHINING	-	APPLICATION	
TOOLING FIXTURE #	REMOVE ALL BURRS AND SHARP EDGES		

UNITS ARE: INCHES [MM]
TOLERANCES ARE:
FRACTIONS DECIMALS ANGLES
 $\pm 1/16"$ $.X \pm .1$ [2.5] $\pm 1^\circ$
 $.XX \pm .06$ [1.5]
(X.XXX) DENOTES CRITICAL DIMS.
ALL THREADS ARE CRITICAL

DRAWN JINSON 04/08/15
CHECKED RAVINDRA 04/08/15
APPROVED J.M. 05/26/15

BRASSTECH		2001 CARNEGIE AVE. SANTA ANA, CA 92705 (949) 417-5207	
INCORPORATED		SKYLAR - SINGLE HOLE FAUCET	
DWG NO.	2563	REV	D
SCALE	.200	REF.	-
SHEET	1	OF	2

