

Halsey Taylor® Owners Manual

SCWT14CB Series Barrier-Free Water Cooler



Note: Danger! Electric shock hazard. Disconnect power before servicing unit.

USES HFC-134A REFRIGERANT

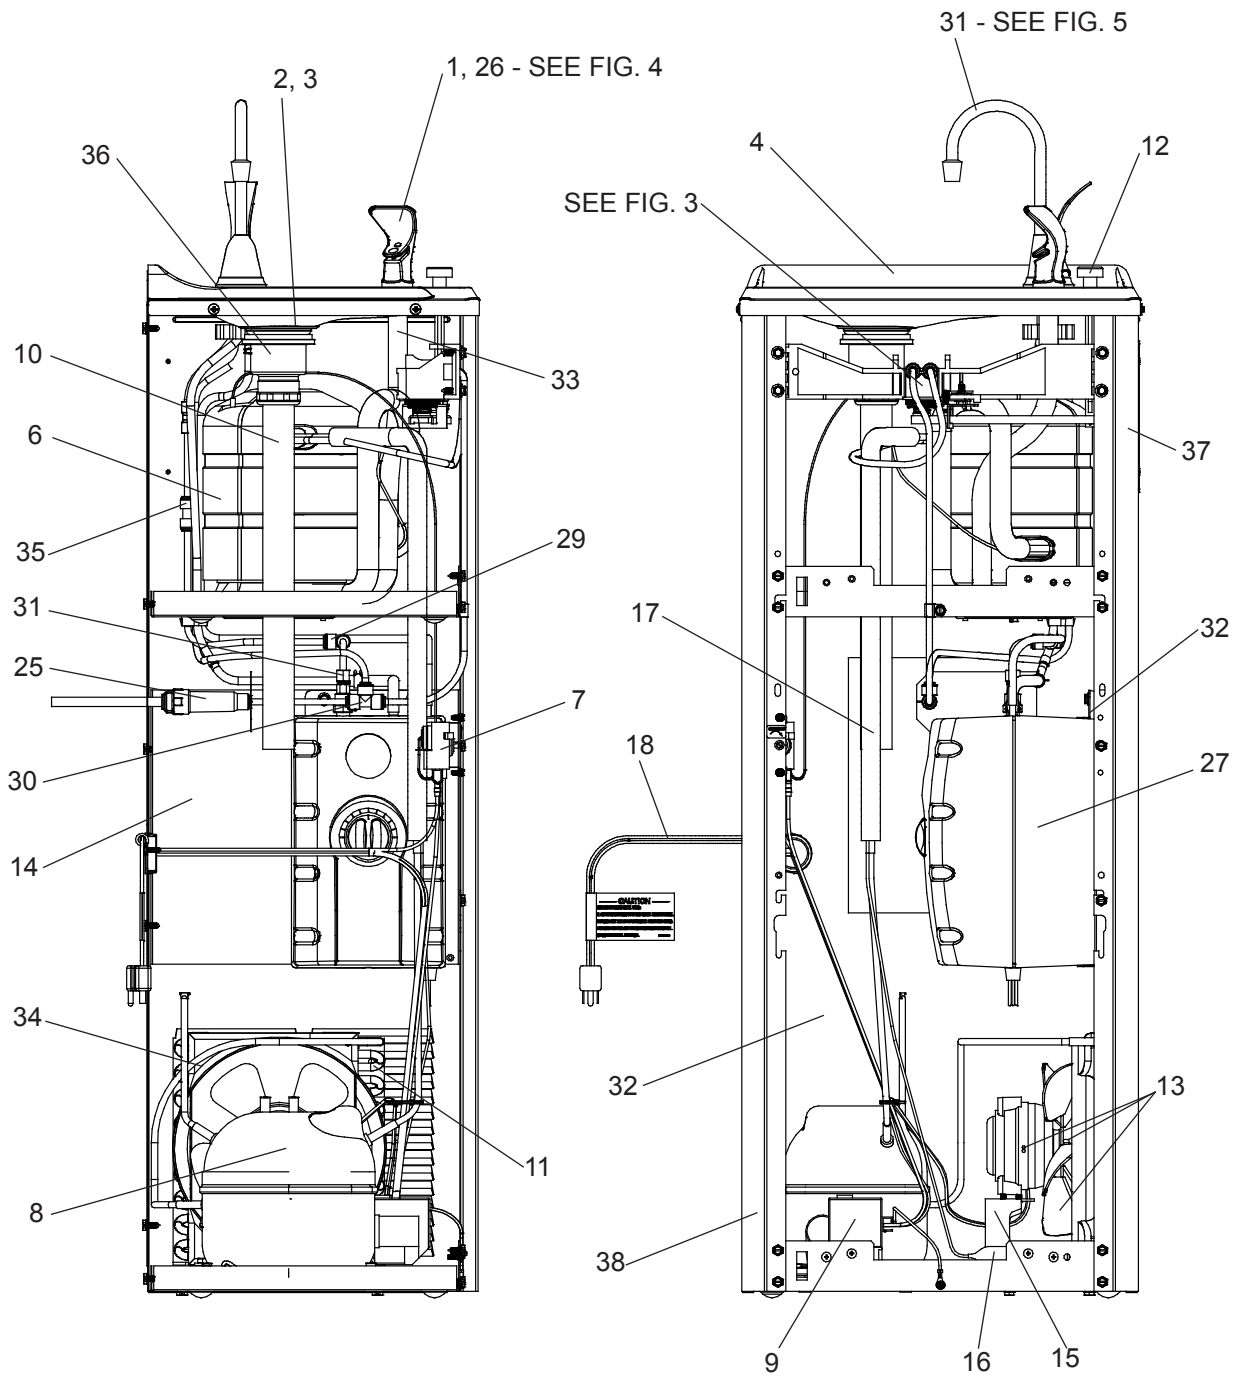


FIG. 1

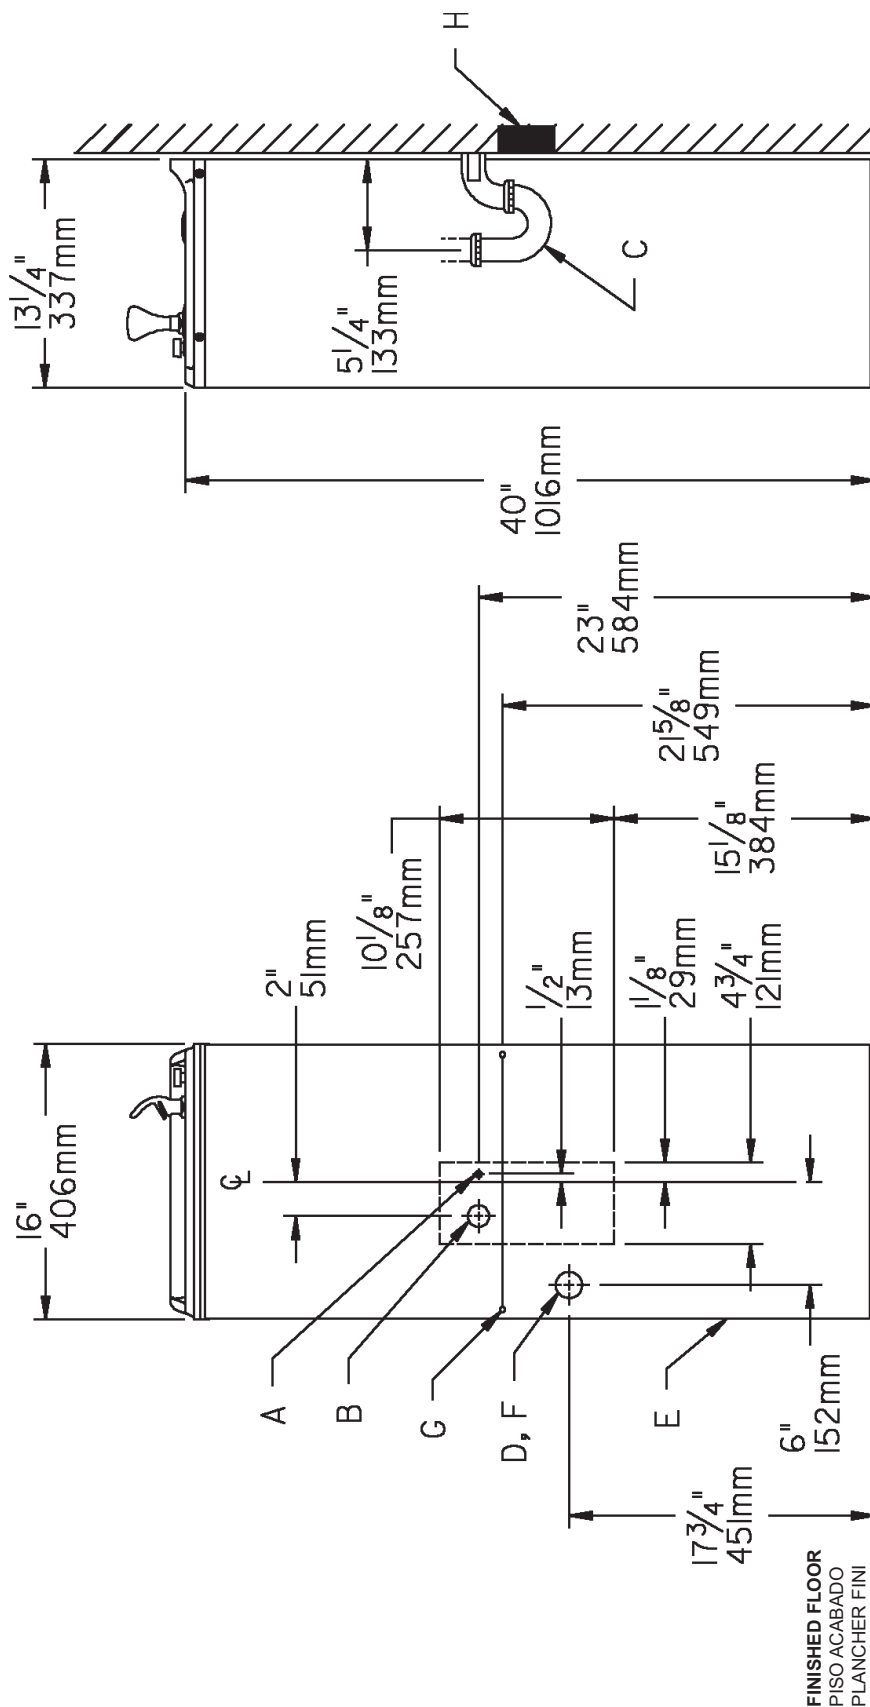


FIG. 2

E = INSURE PROPER VENTILATION BY MAINTAINING 4" (102mm) (MIN.) CLEARANCE FROM CABINET LOUVERS TO WALL.

ASEGURE UNA VENTILACIÓN ADECUADA MANTENIENDO UN ESPACIO E 4" (102mm) (MÍN.) DE HOLGURA ENTRE LA REJILLA DE VENTILACIÓN DEL MUEBLE Y LA PARED
ASSUREZ-VOUS UNE BONNE VENTILATION EN GARDANT 4" (102mm) (MÍN.) ENTRE LES ÉVÉNENTS DE L'ÉCARTÉ ET LE MUR.

ASSUREZ-VOUS UNE BONNE VENTILATION EN GARDANT 4" (102mm) ENTRE LES ÉVÉNEMENTS DE L'ENCEINTE ET LE MUR.

F = POWER CORD 4' (1219mm) LONG

CABLE ELÉCTRICO DE 4" (1219mm) PIE, DE LARGO
CORDON D'ALIMENTATION 4" (1219mm)

G = WALL SCREW HOLES

AGUJEROS DE TORNILLOS DE PARED

TROUS DE VIS DU MUR

H = 2 X 4 BLOCKING

BLOQUEO DE 2 X 4

BLOC 2 X 4

LEGEND/LEYENDA/LÉGENDE
A = RECOMMENDED WATER SUPPLY LOCATION 3/8" O.D. UNPLATED COPPER TUBE CONNECT STUB OUT 1-1/2" IN. (38mm)

FROM WALL SHUT OFF BY OTHERS
SE RECOMIENDA UBICAR EL TUBO CORTO DE CONEXIÓN AL TUBO DE COBRE SIN CHAPAR DE 3/8" DE DIÁM. EXT. A 1-1/2" (38 mm) FUERA DE LA PARED COLOCADA POR TERCEROS.

EMPLACEMENT RECOMMANDÉ D'ALIMENTATION EN EAU PAR TUBE EN CUIVRE NON PLAQUÉ DE 3/8 PO. (9,5 mm) D.E. CONNECTANT UNE TUYAUTERIE DE 1-1/2 PO. (38 mm) DEPUIS LE ROBINET D'ARRÊT FOURNI PAR D'AUTRES.

B = RECOMMENDED LOCATION FOR WASTE OUTLET 1-1/4" O.D. DRAIN
UBICACIÓN RECOMENDADA PARA EL DRENAJE DE SALIDA DE AGUA DE 1 1/4" DE DIÁMETRO.

EMPLACEMENT RECOMMANDÉ POUR LE DRAIN DE D.E. 1-1/4" DE SORTIE D'EAU.

C = 1-1/4 TRAP NOT FURNISHED

PURGADOR DE 1¼ NO PROPORCIONADO

SIPHON 1-1/4 NON FOURNI

D = ELECTRICAL OUTLET LOCATION

UBICACIÓN DE LA TOMA DE ELECTRICIDAD

EMPLACEMENT DE LA PRISE DE COURANT

PUSH BUTTON VALVE ADJUSTMENT


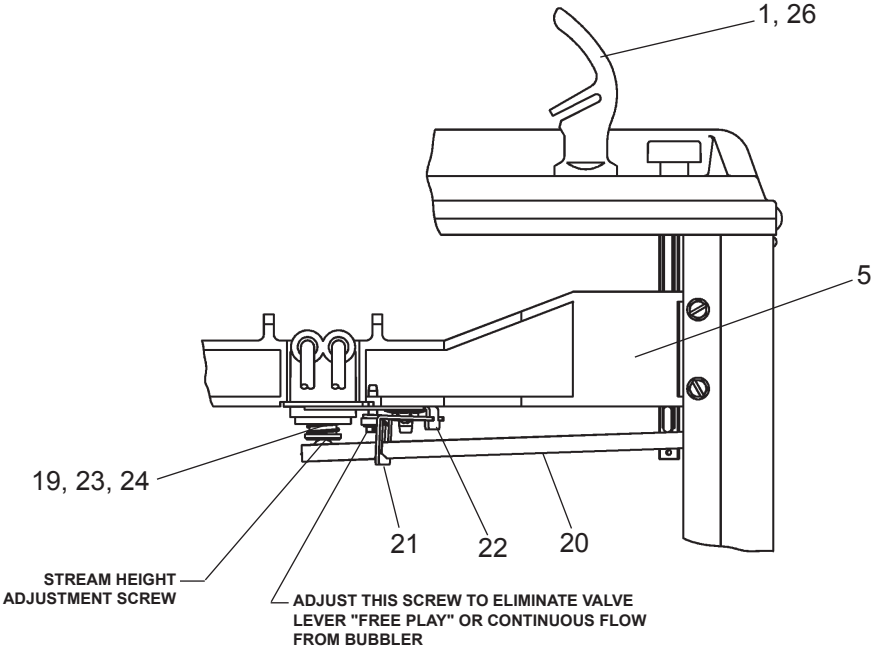


FIG. 3

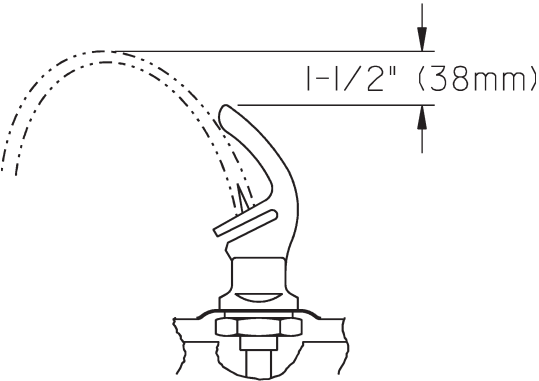

CORRECT STREAM HEIGHT

FIG. 4

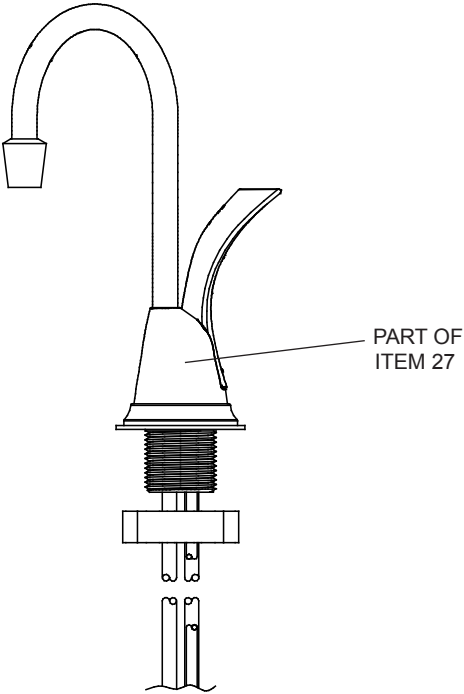


FIG. 5

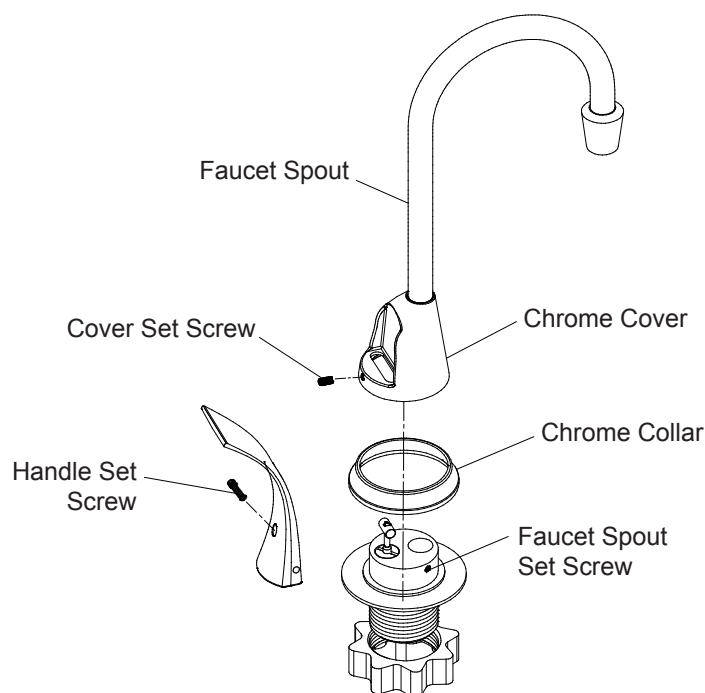


FIG. 6

Faucet Assembly Instructions

1. **Place the faucet spout** through the chrome cover with the smaller diameter end toward the faucet outlet.
2. **Place the chrome collar** over the faucet spout with the smaller diameter toward the bigger diameter chrome cover in step no. 1.
3. **Place the faucet spout end down** inside the same diameter hole in the brass connector.
4. **Hold the chrome collar and cover** up so you can get to the faucet set screw, turn the faucet spout so it goes toward the drain on the cooler.
5. **Tighten the faucet set screw** gradually until faucet will not rotate.
6. **Lower the chrome collar** and the chrome cover down to basin.
7. **Place the chrome cover** so the set screw is toward the rear of the faucet.
8. **Tighten set screw** until cover will not pivot.
9. **Place handle on faucet** with the slot toward the front of the faucet, slide the slot into the brass pin.
10. **Hold handle in snug toward faucet** making sure it is seated into the brass pin, and then tighten the handle set screw until handle will not come off the brass pin.
11. **Removal of the handle** is exactly opposite of the assembly process.

ITEMIZED PARTS LIST

ITEM NO.	PART NO.	DESCRIPTION
1	98553C	Kit - Bubbler/Gasket/Nipple
2	102639931640	Drain Plug
3	160270508640	Strainer Plate
4	28724C	Basin
5	55880C	Bracket-Regulator Mounting
6	98771C	Kit - Evaporator/Drier/Cold Control
7	98773C	Kit - Cold Control
*8	36312C	Compressor Serv. Pak FFII2HBX
9	98755C	Kit - Elect (/Relay/Overload/Capacitor/Brkt.)
10	45897C	Drain Tube
11	66252C	Condenser
12	601451151550	Push Button Assembly
13	0000000247	Kit - 31492C Fan Motor Assy (Fan Motor, Blade, Nut)
14	28439C	Bracket - Hot Tank Mounting
15	402672043730	Fan Motor Bracket
16	66203C	Drier
17	98846C	Kit - Heat Exchanger/Drier
18	35887C	Power Cord
19	98531C	Kit - Regulator/Reg. Holder/Nut
20	26860C	Regulator Lever
21	26861C	Pivot Bracket
22	26862C	Regulator Retaining Bracket
23	1000002145	Kit - Regulator Holder (5-pk)
24	61314C	Regulator
25	55996C	Strainer
26	1000001878	Kit - Bubbler Gasket (25-pk)
27	36261C	Hot Tank Assy
28	402672943730	Back Panel
29	70793C	Elbow - 1/4 x 90°
30	1000001994	Kit - 70682C 1/4" Tee (3-pk)
31	56278C	Fitting - 1/4 Snap Connect
32	28719C	Bracket - Clamp
33	56092C	Poly Tubing (Cut To Length)
34	101452831560	Shroud - Fan
35	1000002162	Kit - 70683C 1/4" Union (3-pk)
36	98683C	Kit - Drain Adaptor/Nut/Gasket/Seal
37	401536248410	Side Panel - Right Platinum Vinyl (PV)
	401536242830	Side Panel - Right Stainless Steel (SS)
38	401536348410	Side Panel - Left Platinum Vinyl (PV)
	401536342830	Side Panel - Left Stainless Steel (SS)
NS	401507448410	Front Panel - Platinum Vinyl (PV)
	401507442830	Front Panel - Stainless Steel (SS)
NS	51454C	Snap Bushing - .75" I.D.

*INCLUDES RELAY & OVERLOAD. IF UNDER WARRANTY, REPLACE WITH SAME COMPRESSOR USED IN ORIGINAL ASSEMBLY.

NOTE: All correspondence pertaining to any of the above water coolers or orders for repair parts MUST include Model No. and Serial No. of cooler, name and part number of replacement part.

PRINTED IN U.S.A.
IMPRESO EN LOS E.E.U.U.
IMPRIME AUX E.-U.

Halsey Taylor

2222 CAMDEN COURT
OAK BROOK, IL 60523
630.574.3500

FOR PARTS CONTACT YOUR LOCAL DISTRIBUTOR OR VISIT OUR WEBSITE WWW.HALSEYTAYLOR.COM