



FlashShield Outlet Box, XR3OUTLETBOX-XX

Gastite Division
1116 Vaugh Parkway
Portland, TN 37148
Telephone 800-662-0208
www.gastite.com

Description

FlashShield™ is metallically shielded corrugated stainless steel tubing system complying with ANSI LC 1 "Fuel Gas Piping Systems Using CSST" and listed with CSA®, ICC and IAPMO. The FlashShield system is also listed to protective jacket standards, ICC-ES PMG LC1024, and LC1027. All mechanical tube fittings are SAE CA360 brass incorporating double wall flare sealing. The Jacket-Lock™ and Metal locking features provide steel tubing protection and continuous conductivity

Features:

- Kit Contains: XR3 Male Termination Fitting, Valve Box, Valve, Finish Plate, Mounting Bracket, Jam Nut, Plug
- For Flush Mount "Fixed-Point" Termination of Appliances
- Approved for Concealed Use
- Tool-Less Flare Fitting Design
- Metal-to-Metal Seal
- Multi-Point Seal
- Self-Guiding Fitting Assembly
- Jacket Lock™ Feature
- Metal Locking Feature
- Fully Reusable Fitting




Listings:

- CSA Certificate 2728525
- ICC-ES Report No. PMG 1066 and PMG 1155
- IAPMO: File No. C-3250 and Report No. 0239

Technical Data:

Max. Approved Operating Pressure	25 psi
Operating Temperature Range	-40°F to 160°F
Fitting Material	CA360

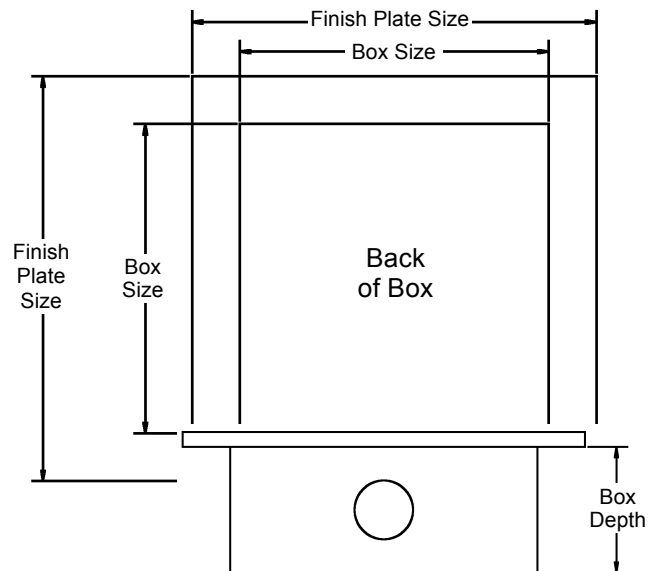

Dimensional Characteristics

Size	P/N	Pipe Thread	Nut Hex	Fitting Hex	Finish Plate Size	Box Size	Box Depth	Assembly Torque (ft-lbs)	Weight (lbs)
1/2"	XR3OUTLETBOX-8	1/2"	1-1/4"	1-1/8"	6-13/16"	5-3/16"	2-1/8"	35	1.54
3/4"	XR3OUTLETBOX-11	3/4"	1-9/16"	1-3/8"	8-1/2"	6-1/2"	3"	45	2.19