

DESCRIPTION

- Brass spout and metal handle construction with Chrome finish
- 3/8" compression stainless steel supply lines
- No lift rod hole in models without drain
- Vandal resistant aerator and handle assembly
- Red and Blue plastic indicator inserts

OPERATION

- Lever style handle
- Temperature controlled by 100° arc of handle travel

FLOW

- Standard aerator is limited to 1.5 gpm max (5.7 L/min)
- Eco-performance aerator is limited to 0.5 gpm max (1.9 L/min)

CARTRIDGE


- 1255 Duralast™ cartridge with brass adjustable temperature limit stop
- Nonmetallic/nonferrous and ceramic material

STANDARDS

- Third party certified to meet WaterSense® (only applies to 1.5 gpm), ASME A112.18.1/CSA B-125.1 and all applicable requirements referenced therein
- Certified to ANSI/NSF 61/9 & 372
- Contains no more than 0.25% weighted average lead content
- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act
- ADA ♿ for lever handles

WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original homeowner
 - 10 year limited warranty when used in a multifamily installation
 - 5 year limited warranty when used in a commercial installation
- Visit www.moen.com/support for complete details and limitations




M•Dura™
Single-Handle Lavatory Faucet

Model	Flow (gpm)	Drain	WaterSense®
9417F15	1.5	Without	X
9417F05	0.5	Without	
9419	1.5	All Metal	X
9419F05	0.5	All Metal	

NOTE: THIS FAUCET IS DESIGNED TO BE INSTALLED THRU 1 HOLE, 1-1/4" MIN. DIA.



See table above

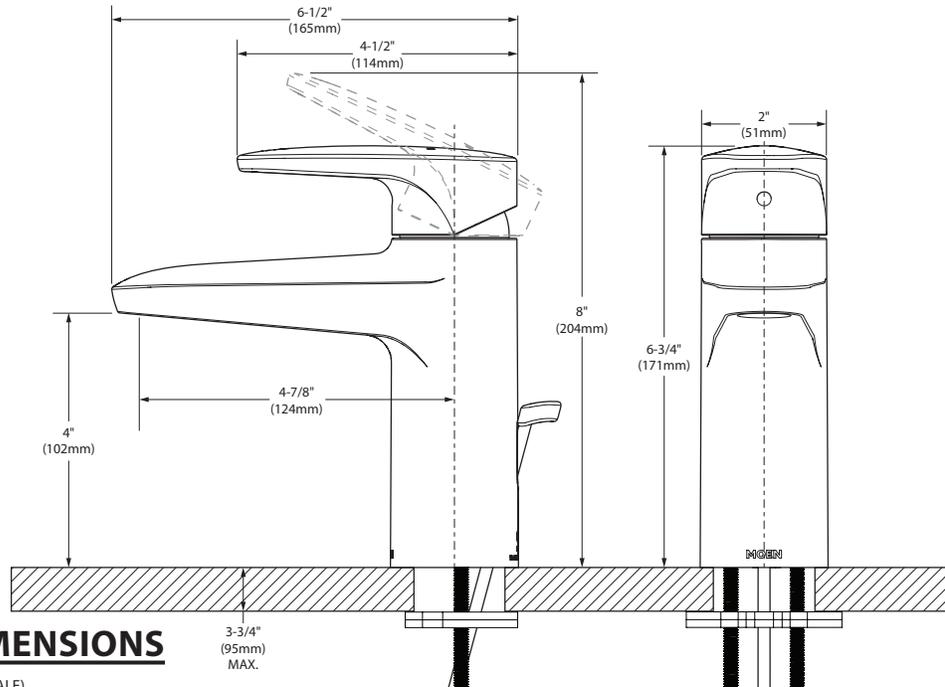

CRITICAL DIMENSIONS

(DO NOT SCALE)