


LG40-MFOC Finish(C) ☐

LG40-MFOK Finish(K) ☐

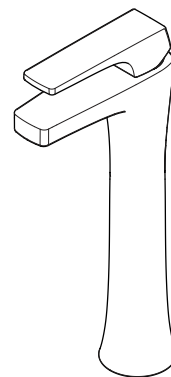

Specifications

Features

- 1.2 GPM Flow Rate
- All Metal Construction
- No Drain Included
- Grid Strainer without Overflow Available, Order 972-103 (Sold Separately)
- Grid Strainer with Overflow Available, Order 972-104 (Sold Separately)
- Pfister Connect™
- Pforever Seal Ceramic Disc Valve
- Pforever Warranty®


Code Compliance

Pfister products are designed and manufactured in compliance with the following standards and codes:

- IAPMO Certified
- CSA B125 Certified
- ASME A112.18.1
- Cal Green Compliant
- NSF 61/9 Annex G (Low lead)
- EPA WaterSense Certification 1.2 gpm, 4.6 L/Min
- ADA Compliant-ANSI A117.1 (Lever handles only)



Dimensions

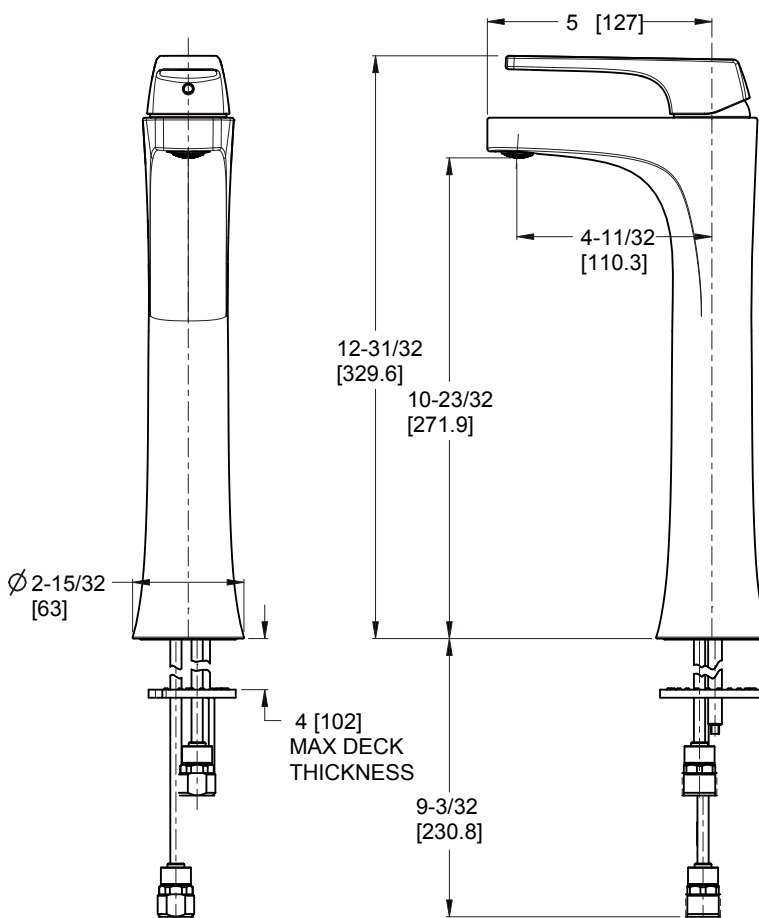

Ø1 Min to Ø1-1/2 Max. Deck Hole Openings