

# OIL TANK ACCESSORIES

## Highfield Mfg. Co./OEM


### Firomatic Fusible Valves

#### FUSIBLE VALVES

Automatically close when temperatures exceed 165°F in oil burner installations.

#### FEATURES:

- Fusible element is located in handwheel, so removal from the line is not necessary for replacement.
- Can be manually operated.
- Self-adjusting stuffing box and back seat prevent leaks at the valve stem.
- UL listed through 1/2" size.

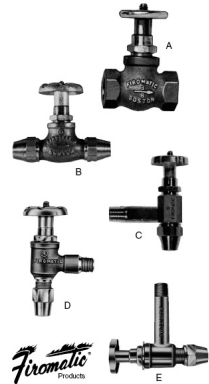

Shape	Inlet	Outlet	Shank	Mfr#	Item#
A Globe	1/4" NPT (f)	1/4 NPT (f)	---	B-50-F	507
A Globe	3/8" NPT (f)	3/8 NPT (f)	---	B-100-F	507-1
B Globe	3/8" flare	3/8" flare	---	B-105-F	511
B Globe	1/2" flare	1/2" flare	---	B-205-F	511-1
A Globe	1/2" NPT (f)	1/2" NPT	---	B-200-F	507-2
C Angle	3/8" comp.	1/4" NPT (m)	1-5/8"	B-104-F	514
E Angle	3/8" comp.	1/4" NPT (m)	---	B-104-FXL	515-12
C Angle	3/8" flare	1/4" NPT (m)	1-5/8"	B-104-CF	514-1
E Angle	3/8" flare	1/4" NPT (m)	2	B-104-CFXL	515-10
C Angle	1/2" flare	1/4" NPT (m)	---	B-204-CF	515-1

#### FUSIBLE ALL PURPOSE VALVES - ANTI-HUM

A Globe	3/8" NPT (f)	3/8" NPT (f)	---	B-100-APF	508
D Angle	3/8" comp.	1/4" NPT (m)	---	B-104-APF	515

## Highfield Mfg. Co.

### Firomatic Lever Valves (Tank to Filter)

#### LEVER VALVE

Lever valve used at the tank and held open by a flexible wire in which fusible links are set. At temperatures of 165°F or greater the links separate and the flow of oil from the tank is immediately stopped.



Size/Description	Material	Mfr#	Item#
3/8" NPT (f) x 3/8" NPT (f)	Bronze	100-L	519

### Firomatic Lever Valves (Tank to Filter)

#### REPLACEMENT ACCESSORIES

Fusible link	---	165F	519-2
Braided wire	---	91303901	519-3

