T	10	7	[ai	nk.	0	rd	lar	-S	uh	m	itts	al	S	he	مد	ı
						1 E V			1 	,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,				# L =	-	


Job Name	Contractor Signature
Orion Representative	Approval Date
Quantity of Tanks	Contractor's P.O. No.

T10 Point-Of-Use Dilution Tank

Specification

Orion T10 POU 1.5 USG Tank shall be cylindrical seamless, stress and defect free, rotationally molded construction with integral cover to uniform wall thickness from virgin PE resins conforming to ASTM D 1248, with **FIP adjustable inlet(s) with dip tube(s), with single MIP outlet and 2" top cleanout as standard.** All penetrations shall be heat fused to tank wall.

Tank Selection (Check One)					
	Part No.	Description			
	736000	Two 1.5" FIP Inlets, One 2" MIP Side Outlet, Black			
	736004	Two 1.5" FIP Inlets, One 2" MIP Side Outlet, White			
	736001	One 1.5" FIP Inlets, One 2" MIP Side Outlet, Black			
	736005	One 1.5" FIP Inlets, One 2" MIP Side Outlet, White			
	736003	Two 2" FIP Inlets, One 2" MIP Side Outlet, Black			
	736007	Two 2" FIP Inlets, One 2" MIP Side Outlet, White			
	736002	One 2" FIP Inlets, One 2" MIP Side Outlet, Black			
	736006	One 2" FIP Inlets, One 2" MIP Side Outlet, White			

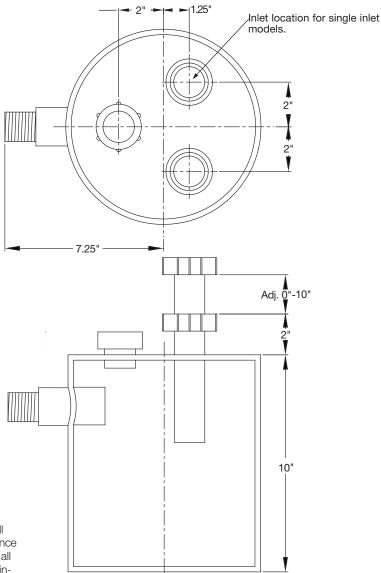

Note: Tanks are made to ± 0.25 in. tolerance.

NOTICE

The information contained herein is not intended to replace the full product installation and safety information available or the experience of a trained product installer. You are required to thoroughly read all installation instructions and product safety information before beginning the installation of this product.

Please verify all selections with your local Orion rep - tank products and accessory equipment are non-returnable.

Orion Fittings product specifications in U.S. customary units and metric are approximate and are provided for reference only. For precise measurements, please contact Orion Fittings Technical Service. Orion Fittings reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Orion Fittings products previously or subsequently sold.



USA: T: (800) 334-6259 • OrionFittings.com

Canada: T: (888) 208-8927 • F: (888) 479-2887 • OrionFittings.ca **Latin America:** T: (52) 55-4122-0138 • OrionFittings.com

A WATTS Brand

ES-OR-T10 2010 © 2020 Watts