

60 x 60 Whirlpool & Soaking Baths



Product Features

- Durable easy-care acrylic construction
- Six color matched power jets
- 7.5 Amp/1.4 HP/60 HZ pump with Nema Cord
- Adjustable air control for whirlpool action
- Textured slip resistant bottom
- Air activated on/off switch
- Silent air induction

Color Palette

- White
- Biscuit

Model Numbers

- PFW6060L** 60" x 60" LH corner whirlpool
PFW6060R 60" x 60" RH corner whirlpool
PFSK6060 60" x 60" removable apron
PFTLKC Tile flange kit for 60" x 60"

Note: Choose left hand or right hand based on desired pump location.

Recommended Parts

- MB138883 / MB138886 PVC/ABS 17"-22" Tub depth
 MB138889 / MB138873 PVC/ABS 23"-27" Tub depth

Warranty and Codes

This product features a 1-year limited warranty and meets or exceeds the following standards: Whirlpools - IAPMO PS32-84, UL listing 27E7, ANSI Z124.1-95, ASME A112.19.8M-87R(96) and ASME A112.19.7M-95. Baths - ANSI Z124.1-95. In an effort to continually improve our products, design changes may periodically be made. Ferguson reserves the right to provide newly designed material to fill any order unless otherwise agreed to in writing.

General Specifications


- 60" side overall
- 21 1/2" depth overall
- 72 gallon operating capacity
- 109 gallon total capacity to overflow
- Tub installation requires a single 115V/20 amp breaker and GFCI Protected Circuit
- Ground fault circuit protection must be provided by installer
- Prewired for simple plug-in installation



Shown with optional removable apron (PFSK6060)

PFW6060LWH

Products Specifications

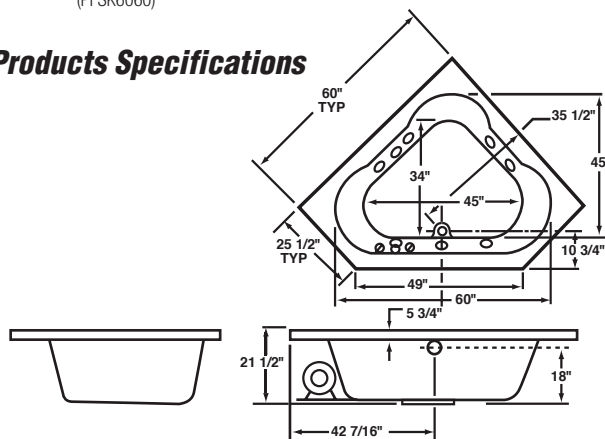

Installation Instructions

Never allow the weight of the tub to be supported by lip on deck or stringers, as this could result in product failure and void the Warranty. Please inspect and test units before install, level and fill tub with water and test for proper operation and drainage or possible water leaks due to transit/handling damage. It is REQUIRED that the tub be supported by the tub bottom and not the tub lip. The lip should only rest on the finished deck surface or support stringers. The tub bottom must be supported by a setting compound such as cement or mortar (fast cure materials are not recommended due to excessive shrinkage). Failure to use a suitable setting compound will void the warranty. A sheet of plastic film on top of compound, is recommended as a barrier. The tub should be set in place (do not handle whirlpool by piping) while compound is still soft so that the compound will conform to the tub bottom. Tub should be worked down into compound so the lip of the tub just makes contact with finished deck surface or support stringers. It may be necessary to partially fill tub with water to aid in properly setting the tub.

NOTE: All dimensions and specifications are nominal and may vary ± Use actual products for accuracy in critical situations.



Distributed Exclusively by Ferguson and Wolseley Canada