



# Submittal Data Information

101-035

## Model 0012 Cartridge Circulator

Effective: January 12, 2015

Supersedes: May 31, 2013

Job: \_\_\_\_\_ Engineer: \_\_\_\_\_ Contractor: \_\_\_\_\_ Rep: \_\_\_\_\_

ITEM NO.	MODEL NO.	IMP. DIA.	G.P.M.	HEAD/FT.	H.P.	ELEC. CHAR.

### Features

- Exclusive ACB Anti-Condensate Baffle with Ambient Air Flow-Protects Motor Windings against Condensate Buildup
- High Velocity Performance-Compact Design
- Quiet, Efficient Operation
- Direct Drive-Low Power Consumption
- Unique Replaceable Cartridge Design-Field Serviceable
- Self Lubricating
- No Mechanical Seal
- Unmatched Reliability-Maintenance Free
- Universal Flange to Flange dimensions
- Cast Iron or Stainless Steel Construction

### Materials of Construction

Casing (Volute):.....Cast Iron or Stainless Steel  
 Stator Housing:.....Aluminum  
 Cartridge:.....Stainless Steel  
 Impeller:.....Non-Metallic  
 Shaft:.....Ceramic  
 Bearings:.....Carbon  
 O-Ring & Gaskets:.....EPDM

### Model Nomenclature

F – Cast Iron, Flanged  
 SF – Stainless Steel, Flanged

### Performance Data

Max. Flow: 52 GPM  
 Max. Head: 14.5 Feet  
 Min. Fluid Temperature: 40°F (4°C)  
 Max. Fluid Temperature: 230°F (110°C)  
 Max. Working Pressure: 150 psi  
 Connection Sizes: 1-1/4", 1-1/2" or 2" Flanged

### Certifications & Listings

**UL** US LISTED FOR INDOOR USE ONLY

**NSF** Low-Lead Compliant


Certified to NSF/ANSI 372

### Application


The Taco 0012 is specifically designed for high flow/medium head applications in large residential and light commercial systems. Ideal for large BTUH Boilers, 2" recirculation loops, Primary/Secondary loops, commercial water heaters and light commercial heating and cooling systems. The Stainless Steel 0012 can be used on open loop systems. The unique replaceable cartridge contains all of the moving parts and allows for easy service instead of replacing the entire circulator. Universal flange to flange dimensions and orientation allows the 0012 to easily replace other models. Compact, low power consumption design makes it ideal for high-efficiency jobs. The 0012-F4 is a direct replacement for the HV Series and the 0012-F4-1 is a direct replacement for the 2" Series using existing flanges.

### Pump Dimensions & Weights FLANGES INCLUDED

Models	Casing	Flange Size	Flange Orientation	A		B		C		D		F		G		Ship Wt.	
				in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	lbs.	Kg
0012-F4	Cast Iron	1-1/2"	S	8-5/8	219	6-3/8	162	4-1/4	108	3-5/16	84	5-1/2	140	8-1/2	216	13.0	5.9
0012-F4-4	Cast Iron	1-1/2"	R	8-1/16	205	6-3/8	162	4-1/4	108	3-5/16	84	6	152	8-1/2	216	13.0	5.9
0012-SF4	St. Steel	1-1/2"	S	8-5/8	219	6-3/8	162	4-1/4	108	3-5/16	84	5-1/2	140	8-1/2	216	13.0	5.9
0012-SF4-5	St. Steel	1-1/2"	R	8-1/16	205	6-3/8	162	4-1/4	108	3-5/16	84	6	152	8-1/2	216	13.0	5.9
0012-F4-1	Cast Iron	2"	S	9	229	6-3/8	162	4-1/4	108	3-5/16	84	5-1/2	140	8-1/2	216	13.0	5.9
0012-SF4-1	St. Steel	2"	S	9	229	6-3/8	162	4-1/4	108	3-5/16	84	5-1/2	140	8-1/2	216	13.0	5.9

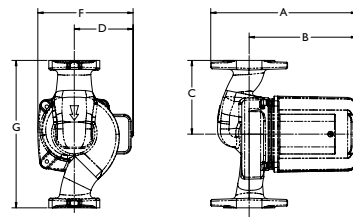


### Mounting Positions

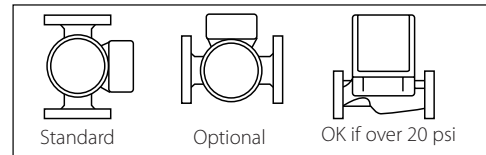


### Electrical Data

Model	Volts	Hz	Ph	Amps	RPM	HP
All Models	115	60	1	1.33	3250	1/8
Motor Type	Permanent Split Capacitor Impedance Protected					
Motor Options	220/50/1, 220/60/1, 230/60/1, 100/110/50/60/1					

### Performance Field — 60Hz

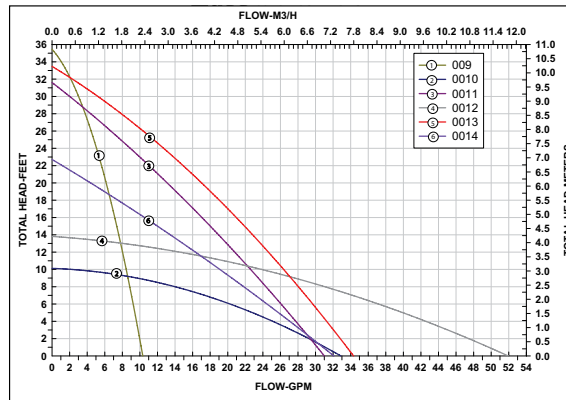

### Flange Orientation



Taco, Inc., 1160 Cranston Street, Cranston, RI 02920 | Tel: (401) 942-8000 | FAX: (401) 942-2360

Taco (Canada), Ltd., 8450 Lawson Road, Suite #3, Milton, Ontario L9T 0J8 | Tel: (905) 564-9422 | FAX: (905) 564-9436

Visit our web site: www.TacoComfort.com | Printed in USA | ©2015 Taco, Inc.

