


# BRASS GATE VALVE


**667 & 668**

200 WOG

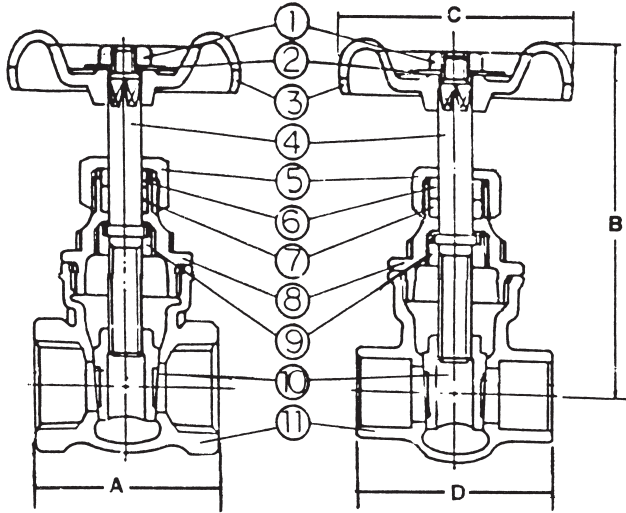


**667 Threaded**

**668 Solder**



**667 Threaded**



**668 Solder**

DIMENSIONS (INCHES)					Approx. Weight	Approx. Weight
SIZE	A	B	C	D	667	668
1/4	1-5/8	2-27/32	2-1/8	-	.55	-
3/8	1-5/8	2-27/32	2-1/8	1-5/8	.53	.53
1/2	1-11/16	2-29/32	2-1/8	1-25/32	.57	.52
3/4	1-27/32	3-5/16	2-1/8	2-5/16	.81	.76
1	2-3/16	3-15/16	2-13/32	2-27/32	1.13	1.07
1-1/4	2-13/32	4-11/32	2-15/16	3	1.75	1.65
1-1/2	2-7/16	4-15/16	2-15/16	3-7/32	2.12	2.00
2	2-27/32	6-1/32	3-3/16	3-31/32	3.20	3.10
2-1/2	3-1/2	7-7/16	3-15/16	4-21/32	7.00	6.00
3	3-31/32	8-5/8	5-1/8	5-9/32	9.62	8.75
4	4-9/16	10	6-25/32	-	17.00	-

**RATING**

- 200 PSI NON-SHOCK COLD WATER, OIL OR GAS

**FEATURES**

- BRASS BODY
- THREADED OR SOLDER ENDS
- THREADED BONNET
- INTEGRAL SEAT
- ADJUSTABLE PACKING NUT
- NON-RISING STEM
- SOLID WEDGE DISC
- IRON HANDWHEEL
- 100% FACTORY TESTED

MATERIAL SPECIFICATION			
1	Handwheel Nut	Steel	COMMERCIAL
2	Nameplate	Aluminum Sheet	COMMERCIAL
3	Handwheel	Cast Iron	ASTM A48, CLASS 35
4	Stem	Brass Rod	ASTM B16, C36000
5	Packing Nut	Brass Rod	ASTM B16, C36000
		Cast Brass	ASTM B584, C85700
6	Gland	Brass Rod	ASTM B16, C36000
7	Packing Ring	Non-Asbestos	
		Synthetic Fibers	
8	Bonnet	Cast Brass	ASTM B584, C85700
9	Locknut	Brass Rod	ASTM B16, C36000
10	Disc	Cast Brass	ASTM B584, C85700
11	Body	Cast Brass	ASTM B584, C85700

The information presented on this sheet is correct at the time of publication. Hammond Valve reserves the right to change design, and/or material specifications without notice. For the most current information access [www.hammondvalve.com](http://www.hammondvalve.com)