



Gate Valves, Stop Valves, Check Valves, Sillcock Valves

Stop Valves / Stop and Waste Valves

A.Y. McDonald Mfg. Co. Stop/Stop and Waste valves are constructed of heavy duty brass recommended for residential and commercial installations and provide positive shut off with multiple end and body configurations. Typical installations would include applications where shut off is required in-line. Waste feature is used to drain the line on the un-pressurized side of the valve.



2024

Angle Stop Valve


Inlet: Copper Flare

Outlet: FIP Thread

Sizes: 3/4" x 1/2", 3/4" x 3/4",
1" x 3/4", 1" x 1"

MATERIALS - 2024

NO.	PART	MATERIAL	SPEC. ASTM
1	Body	Bronze	C84400
2	Screw	Brass	C36000
3	Seat	Rubber	NBR
4	Bonnet	F. Brass	C37700
5	Packing	Teflon	PTFE
6	Packing Nut	Brass	C36000
7	Stem	Brass	C36000
8	Handwheel	Cast Iron	A48
9	Name Plate	Aluminum	
10	Screw	Steel/Brass Plated	
11	Meter Coupling	Bronze	C84400
12	Drain Nut	Brass	C36000
13	Drain Packing	Rubber	NBR

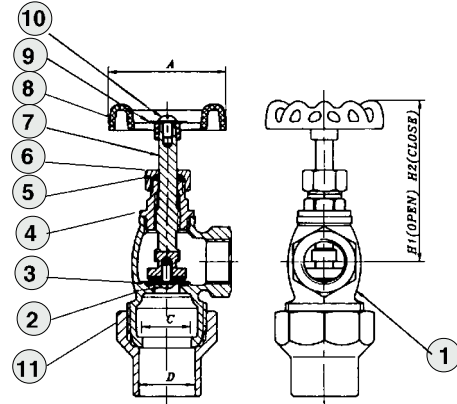

DIMENSIONS - 2024

SIZE	A	H1	H2	C	D
3/4" x 1/2"	2.34	3.51	3.12	.74	.90
3/4" x 3/4"	2.34	3.51	3.12	.74	.90
1" x 3/4"	2.34	3.51	3.12	.99	1.15
1" x 1"	2.73	4.29	3.63	.99	1.15