


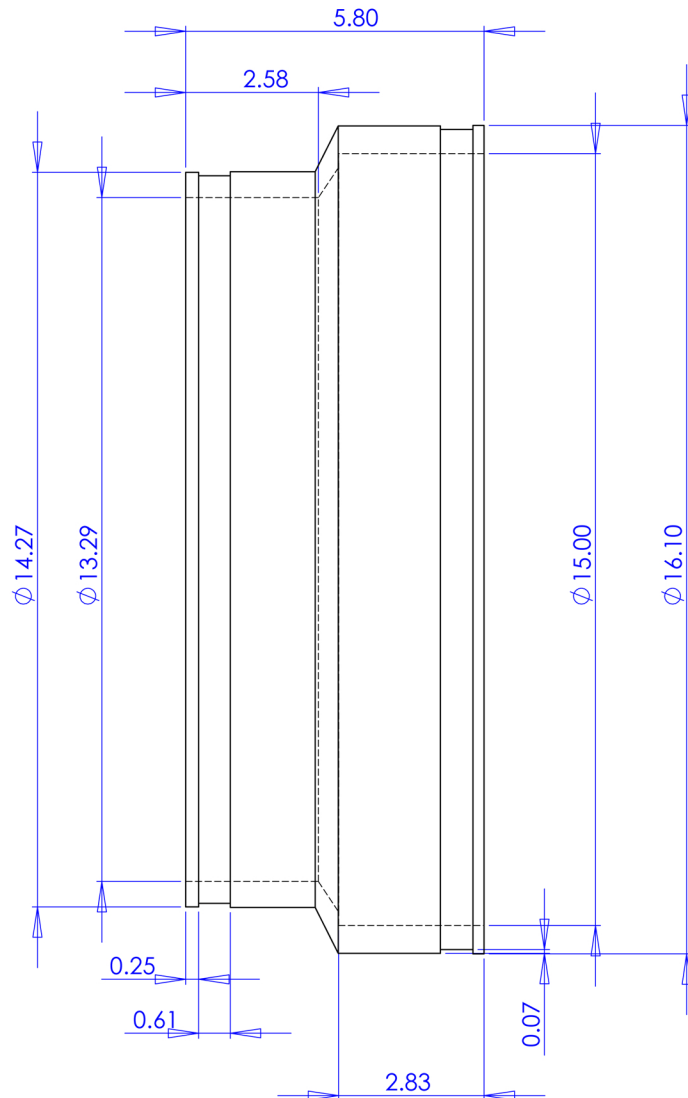

Part Weight	6.58 lbs.
Min/Max Temp.	-30/140 Degrees F
Pressure Tested	4.3 PSI
Material	Flexible PVC 60 Duro Shore A
Installation Torque	60" Lbs.
Conforms to ASTM	D5926, C1173
Box Quantity	2
Clamps used	300 Series

TOLERANCES:
 .X= Fractional ±
 .XX= ±.060
 .XXX= ±.032
 ANG.= ±0.5°
 UNLESS OTHERWISE SPECIFIED

DESCRIPTION:
 Coupling 12" Clay x 12" Ductile
 Iron/Asb. Cement

1003-1212

PROPRIETARY AND CONFIDENTIAL
 THE INFORMATION CONTAINED IN THIS
 DRAWING IS THE SOLE PROPERTY OF
 FERNCO, INC. ANY REPRODUCTION IN
 PART OR AS A WHOLE WITHOUT THE
 WRITTEN PERMISSION OF FERNCO, INC.
 IS PROHIBITED.

UNITS: INCHES	SIZE A	DESIGNER: D. Brady	SCALE not to scale
3RD ANGLE PROJECTION DO NOT SCALE DRAWING	CHECKER:	DATE: 9/17/2010	SHEET 1 OF 1