



AIR ELIMINATION EQUIPMENT

707 High Capacity Float-Type Air Vent

150 PSIG Working Pressure

Construction


| | |
|----------|---------------------------------|
| Material | Cast Bronze Body, Nickel Plated |
|----------|---------------------------------|

Performance

| | |
|-------------------------------|---------------------|
| Maximum Operating Temperature | 240°F (116°C)* |
| Maximum Working Pressure | 150 PSIG (10.5 bar) |
| Maximum Venting Pressure | 50 PSIG (3.4 bar) |
| Warranty | 1-Year |

Application

- High capacity float-type air vent.
- Improves system efficiency in closed loop heating or chilled water systems.
- Removable cap allows easy disassembly for cleaning and service.
- Suitable for use in water or water/glycol application with 50% glycol maximum.
- 700-QC Model includes quick change valve for easy vent removal without the having to shut down and drain the system.

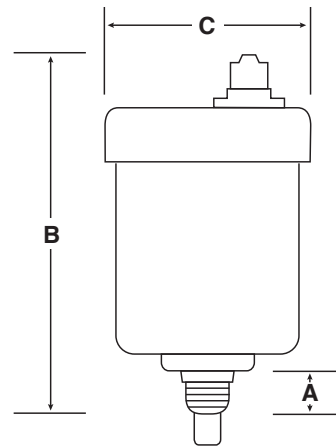

| Model Number | Description | Dimensions | | | | | Weight | | Quantity Per Case |
|--------------|------------------------------|----------------|------|----|------|----|--------|-----|-------------------|
| | | A (Connection) | B | | C | | lbs. | kg | |
| | | In | In | mm | In | mm | | | |
| 700-QC | 1/8" Quick Change Float Vent | 1/8" NPT | 3.2" | 81 | 1.9" | 48 | .5 | .27 | 24 |
| 700-C | 1/8" Float Vent | 1/8" NPT | 3.2" | 81 | 1.9" | 48 | .5 | .27 | 24 |
| 700-C | 1/4" Float Vent | 1/4" NPT | 3.2" | 81 | 1.9" | 48 | .5 | .27 | 24 |

All dimensions and weights are approximate.

| | |
|------------------|-------------|
| Job Name _____ | Notes _____ |
| Engineer _____ | _____ |
| Contractor _____ | _____ |
| P.O. No. _____ | _____ |
| Sales Rep. _____ | _____ |
| Model No. _____ | _____ |

