



ON-A-WALL P14M, P8M, PM

Suggested Specification

Cabinet finish shall be sandstone powder coated paint on galvanized steel or brushed stainless steel. Shall use R-134a refrigerant. Shall comply with ANSI 117.1 and ADA. Shall be listed by Underwriters Laboratories to US and Canadian standards. Shall comply with ANSI/NSF 61 and NSF/ANSI 372.

Models

- **P14M** delivers 14.0 gph of chilled drinking water
- **P8M** delivers 8.0 gph of chilled drinking water
- **PM** is a non-refrigerated fountain.

Standard Features

- Dial-A-Drink® bubbler
- Waterways are Lead-Free in materials & construction
- Stainless steel top
- Welded heavy-gauge steel frame
- High efficiency cooling system

Finishes

- Standard cabinet finish: Sandstone powder coated paint on galvanized steel
- Optional finishes (at additional cost): Stainless steel

Installation

- Prior to roughing consult with local, state and federal codes for proper mounting height
- Shipped with complete instructions and wall mounting bracket
- Removable side and front panels provide easy access for installation

Options (at additional cost)

- Push handle glass fillers (029603-004)
- Kit 029137-002 is required for field installation for the above glass fillers
- VersaFilter

Limited 5-Year Warranty

(Continental limits of the United States and Canada)
Five years on the sealed refrigeration system and most component parts. Detailed warranty certificate enclosed with each water cooler; sample available upon request.

Export Warranty

One year on components parts. Detailed warranty certificate enclosed with each drinking fountain; sample copy available upon request.

Certifications/Compliance

- Oasis International Electric Water Coolers are listed by Underwriters Laboratories Inc. and comply with both U.S. and Canadian Requirements.
- Product Certified to NSF/ANSI Standard 61-G & 372 and conforms with the lead content requirements for “lead free” plumbing as defined by California, Vermont, Maryland, and Louisiana state laws and the U.S. Safe Drinking Water Act.
- This unit complies with ARI standard 1010 Testing, Operating and Rating requirements (electric water coolers only).



P14M does not meet NSF/ANSI 61-G


P14M: Special export models available, operable on 220-240 volts, 50/60 Hz

Model	50° F Drinking Water 90° F Ambient Ait Temp*			Hot' N Cold Model	115 Volts, 60 HZ			Glass Filler Acc. Option	Cabinet Color Finish	Net Wt. Approx
	Rated Capacity GHP	Base Rate GHP	Pre-Cooler		Compr. HP	Full Load Amps	Rated Watts			
P14M	14.0	7.8	Yes	No	1/4	4.4	500	Yes	Yes	76 Lbs
P8M	8.0	8.0	No	No	1/4	4.4	500	Yes	Yes	72 Lbs
PM	Fountain Only							No	Yes	36 Lbs

* Industry Standard Rating Condition 80° F inlet water temperature

Specifications subject to change without notice

OASIS® ON-A-WALL WATER COOLER MODELS P14M, P8M, PM

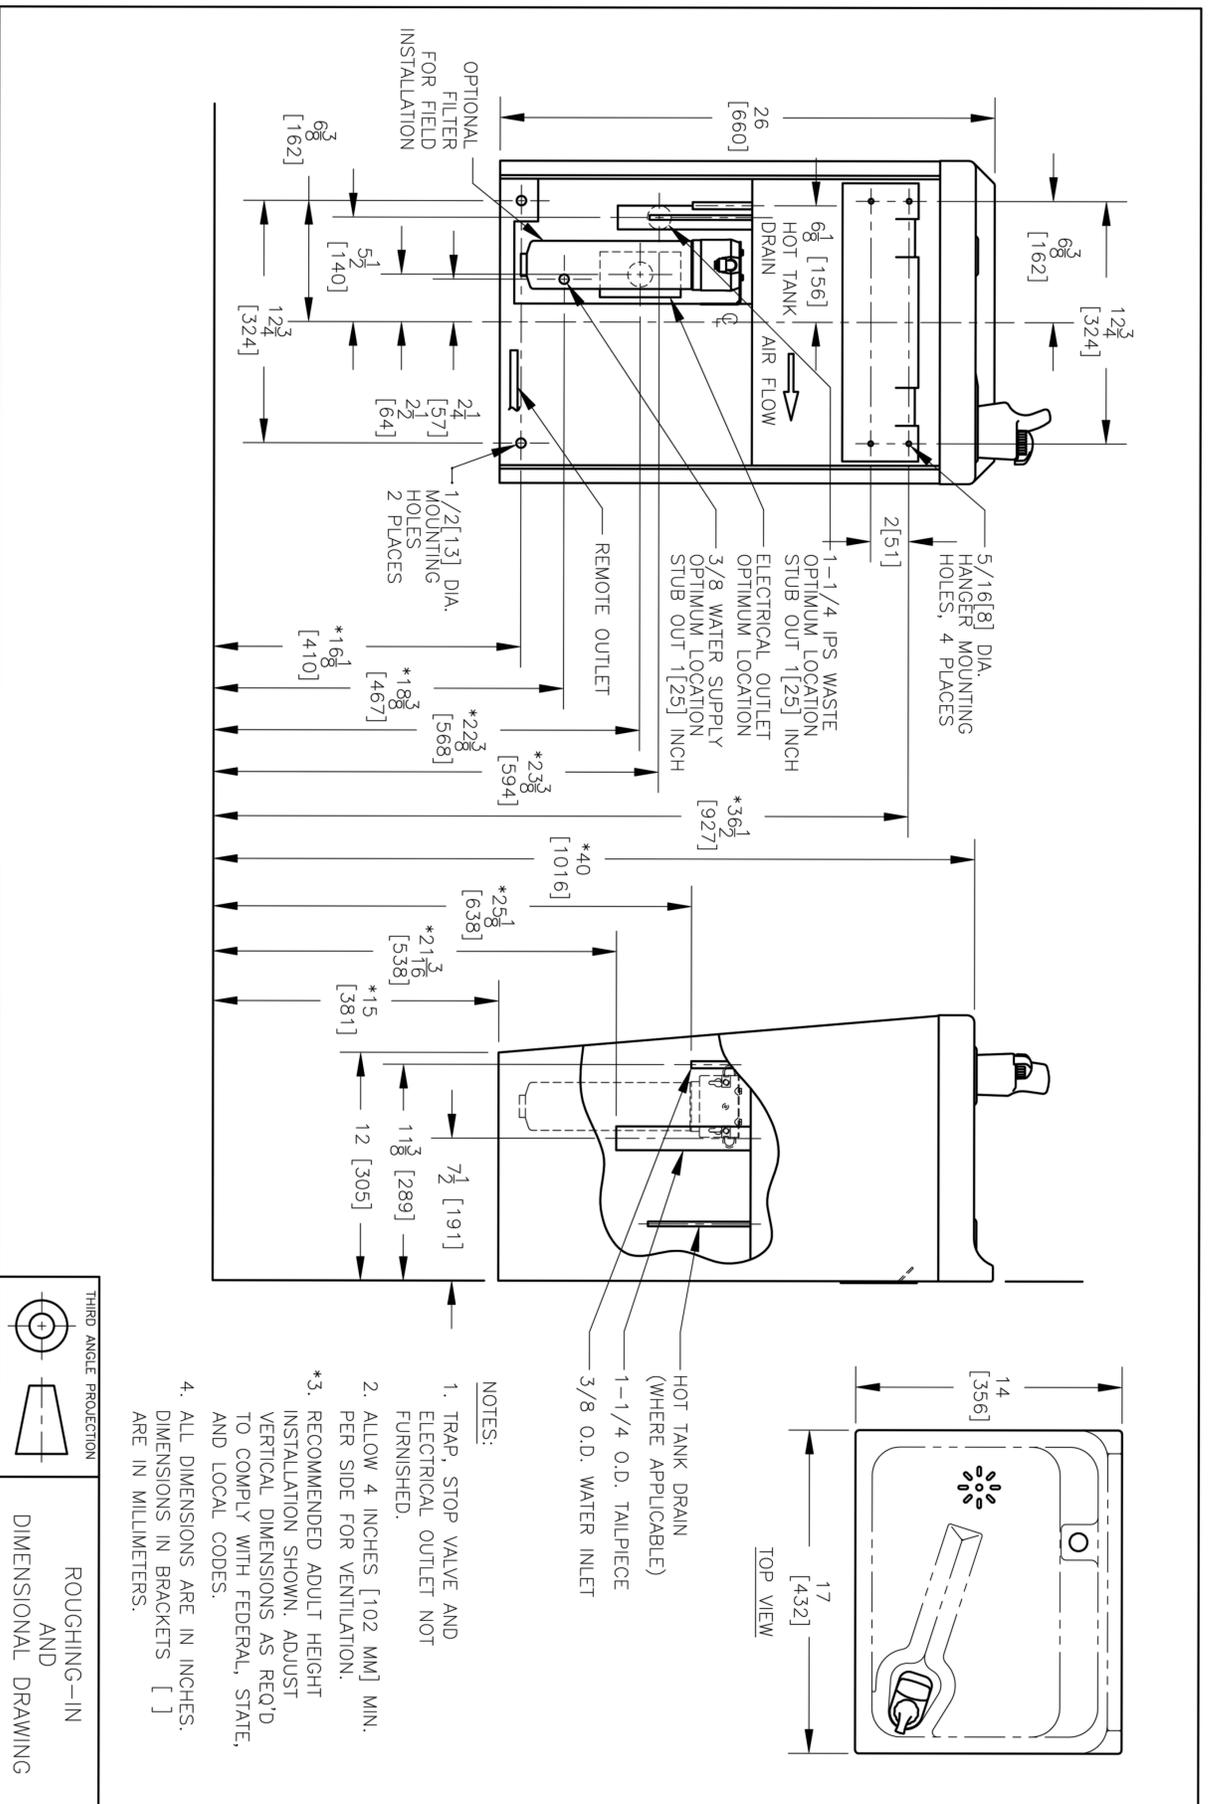

- NOTES:
1. TRAP, STOP VALVE AND ELECTRICAL OUTLET NOT FURNISHED.
 2. ALLOW 4 INCHES [102 MM] MIN. PER SIDE FOR VENTILATION.
 3. RECOMMENDED ADULT HEIGHT INSTALLATION SHOWN, ADJUST VERTICAL DIMENSIONS AS REQ'D TO COMPLY WITH FEDERAL, STATE, AND LOCAL CODES.
 4. ALL DIMENSIONS ARE IN INCHES. DIMENSIONS IN BRACKETS [] ARE IN MILLIMETERS.



Oasis International, 222 East View Campus View Blvd., Columbus, OH 43235
 For customer service and technical helpline assistance call: 800.950.3226

Oasis and VersaCooler are registered trademarks of LVD Acquisition, LLC dba Oasis International. © 2016 LVD Acquisition



www.oasiscoolers.com