



READY-FLAME COMBINATION TORCHES FOR ROOFING, HEATING & HEAT SHRINKING

AP-54

Designed for continuous or intermittent use. At the squeeze of a lever, operator can go from pilot flame to full-brush flame as needed. Has adjustable pilot valve.

Match tips and extensions below for your needs or see complete kits at bottom of page.


TIP ENDS FOR EXTENSIONS

Engineered to provide a variety of heat and flame characteristics when combined with the handles and extensions on this page. Screws onto "EX" extensions.

TIP NO.		FLAME	DIAMETER	BTU'S @ 40 psi
BP-2TE		Pencil*	1"	11,000
BP-5TE		Brush*	1-3/8"	57,000
BP-6TEC		Brush*	2"	300,000
BP-66C <i>Piezoelectric ignitor tip.</i>		Brush*	2"	300,000

* For propane only

BRASS EXTENSIONS FOR TORCHES



EXTENSION	DESCRIPTION (INCHES)
EX-4B	4" Bent
EX-12B	12" Bent
EX-18B	18" Bent
EX-18S	18" Straight
EX-24B	24" Bent
EX-30B	30" Bent

READY-FLAME KITS

KP-104-H (Short 4" Extension)


Contents: AP-54 Torch, EX-4B Ext, BP-6TEC Tip, EP-80G regulator, MP-10 Torch stand, HEF-25 hose, and MP-1 lighter.

KP-118-H (Includes 18" Extension)

Contents: AP-54 Torch, EX-18B Ext, BP-6TEC Tip, EP-80G regulator, MP-10 Torch stand, HEF-25 hose, and MP-1 lighter.

KP-118M-H (18" Extension w/ Igniter Tip)

Contents: Same as KP-118-H except with BP-66C igniter tip end.

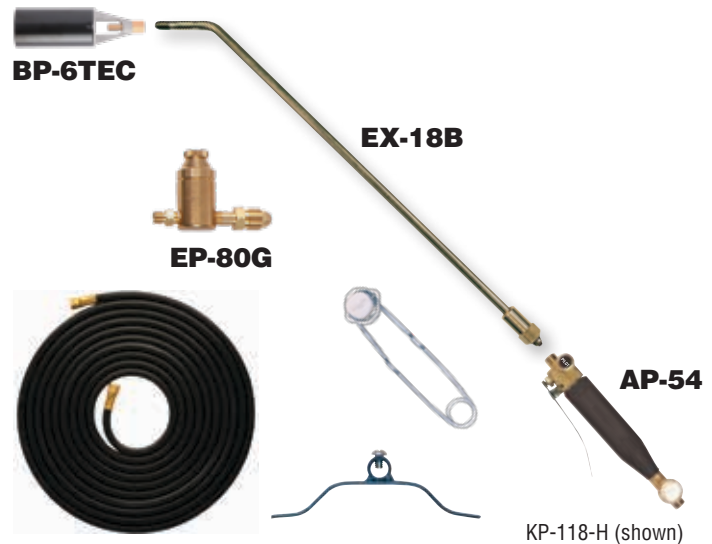

OUTDOOR FURNACES



FLOOR FURNACE*

FP-540

A well-constructed melting furnace with brush flame burner.

BTUs	Approx. 43,200
Gas Usage	Approx. 2 lb./hr.
Height	8 in.
Weight	8 lb.
Diameter	8-1/2 in.

*For propane only.

- Hose and regulator required for use

For FP-540 Furnace



FP-S1

Straight wind shield.
Diameter: 7-5/8 in.

CAUTION: This equipment is an unvented device not designed for use indoors and MUST NOT be used in an enclosed area. DO NOT leave equipment operating unattended. Follow operating instructions included with this equipment. Use in accordance with all Federal, State, and local regulations.