




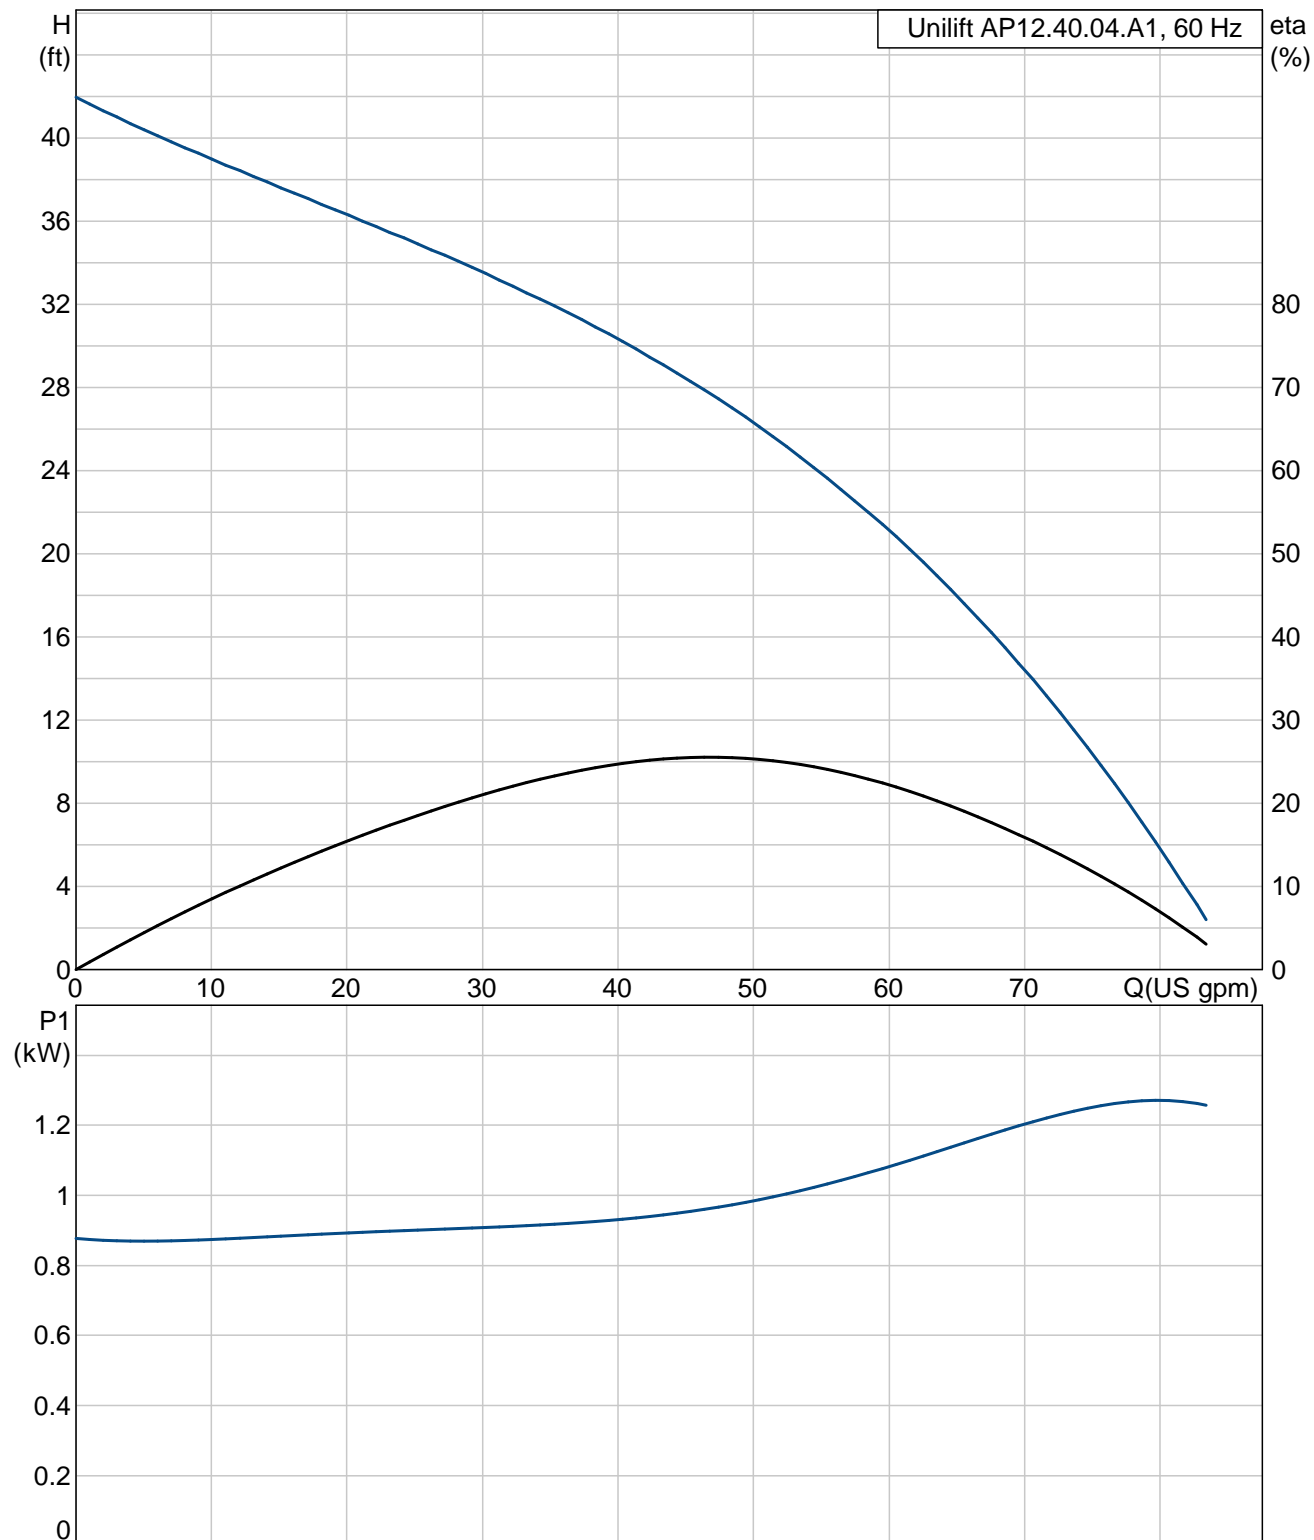
Company name: -
 Created by: -
 Phone: -
 Fax: -
 Date: -

Position	Count	Description	Unit price
	-1	<p>Unilift AP12.40.04.A1</p>  <p>Product photo could vary from the actual product</p> <p>Product No.: 96847166 Submersible drainage pump type</p> <p>Vertical single-stage stainless steel submersible pump with vertical discharge port and integrated submersible 1-phase totally enclosed motor in insulation class F with thermal overload protection.</p> <p>The pump is fitted with suction strainer and level switch for automatic start and stop.</p> <p>The impeller is a Semi-open impeller for 7/16 in free passage suitable for pumping groundwater, surface water, rain water and similar liquids.</p> <p>The pump has a double shaft seal and an intermediate oil chamber pre-filled with non-toxic special oil.</p> <p>The pump has a riser pipe, a cooling jacket for continuous cooling of the motor by the pumped liquid and long-life deep-groove greased-for-life ball bearings.</p> <p>The pump is ready for use as it is fitted with carrying handle and is supplied with a 24.9 ft mains cable. The mains cable is of the plug type with glass sealing compound in the socket to prevent penetration of humidity into the stator windings.</p> <p>Liquid: Liquid temperature range: 32 .. 131 °F Density: 62.4 lb/ft³</p>	On request


Position	Count	Description	Unit price
		Technical: Type of impeller: Semi-open Maximum particle size: 7/16 in Approvals on nameplate: CSA Materials: Pump housing: Stainless steel DIN W.-Nr. 1.4301 AISI 304 Impeller: Stainless steel DIN W.-Nr. 1.4301 AISI 304 Installation: Pump outlet: 1.5" NPT Maximum installation depth: 32.8 ft Electrical data: Type of motor: PSC Power input - P1: 0.92 W 0.7 kW Main frequency: 60 Hz Rated voltage: 1 x 115 V Rated current: 8 A Starting current: 24 A Cos phi - power factor: 0,99 Rated speed: 3350 rpm Capacitor size - run: 20 µF/400 V Enclosure class (IEC 34-5): 68 Insulation class (IEC 85): F Length of cable: 24.9 ft Type of cable plug: US Others: Net weight: 53.6 lb Shipping volume: 1.17 ft ³	



96847166 Unilift AP12.40.04.A1 60 Hz



96847166 Unilift AP12.40.04.A1 60 Hz

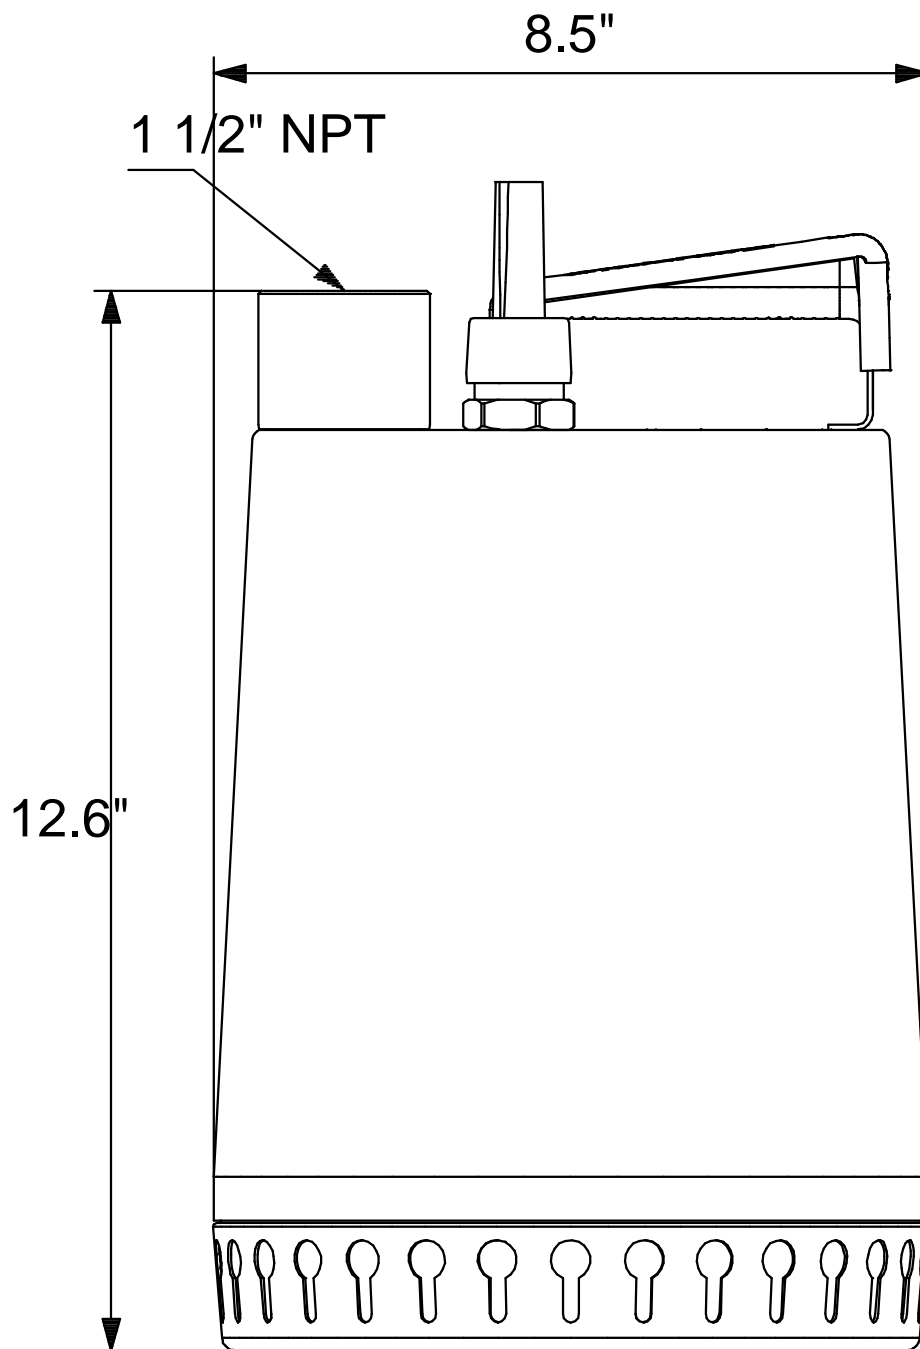

Note! All units are in [mm] unless others are stated.
Disclaimer: This simplified dimensional drawing does not show all details.