



Architect/Engineering Specifications:



Rosespray with 3/8" NPSM male thread and washer. Certified to NSF 61- Section 9 and NSF 372.

Job Name _____

Model Specified _____ Quantity _____

Variations Specified _____

Date _____

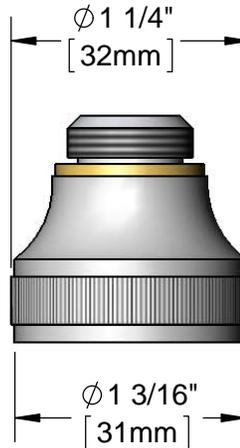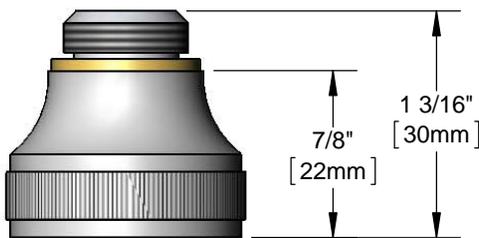

Features & Benefits:

- Rosespray w/ solid brass construction
- 3/8" NPSM male thread
- Washer included
- Material: Chrome plated brass body

Product Compliance:

- NSF 61 - Section 9
- NSF 372 (Low Lead Content)



Warranty: One Year (Limited)



Performance Data:

- Pressure: 20 - 125 psi
- Temperature: 40 °F - 140 °F
- Flow Rate: 12.60 GPM @ 60 psi

