



Gilford™ | K-12700

30" top-/wall-mount single-bowl farmhouse kitchen sink

Features

- Fits minimum 30" (762 mm) apron sink base cabinet
- Single bowl
- 8-5/8" depth
- Integral apron and backsplash
- Two faucet holes
- Requires K-1814-P and service part 63002 for wall-mount installation (sold separately)



Available Colors/Finishes

Color tiles intended for reference only.

■ 0 White



1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
4-22-2026 10:5 - US-CA

THE BOLD LOOK
OF **KOHLER**

Codes/Standards

ASME A112.19.2/CSA B45.1

Technical Information

All product dimensions are nominal.

Number of Deck Holes:	2
Faucet Hole(s) Size:	1-3/8" (35 mm)
Drain Hole Diameter:	3-5/8" (92 mm)
Minimum Base Cabinet Width:	30" (762 mm)
Basin Configuration:	Single Bowl

Material

- Vitreous china

Recommended Products/Accessories

63002 Bracket, Tie Bar
 K-23726 Drain treatment
 K-1814-P Wall brackets
 K-8803 Sink strainer basket
 K-8804 Sink drain body with tailpiece
 K-8813 Stainless steel sink drain and strainer with tailpiece for 3-1/2" to 4" outlet
 K-8814 Stainless steel sink drain and strainer for 3-1/2" to 4" outlet
 K-8807 Brass sink drain and strainer with tailpiece for 3-1/2" to 4" outlet
 K-11352 Disposal flange with stopper
 K-9000 Adjustable P-trap with tubing outlet, 1-1/2" x 1-1/2"
 K-6002 Sink rack, 26-1/2" x 16-1/2"


Warranty

See website for detailed warranty information.

KOHLER® One-Year Limited Warranty



1-800-4KOHLER (1-800-456-4537)
 Kohler Co. reserves the right to make revisions without notice to product specifications.
 For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
 4-22-2026 10:5 - US-CA

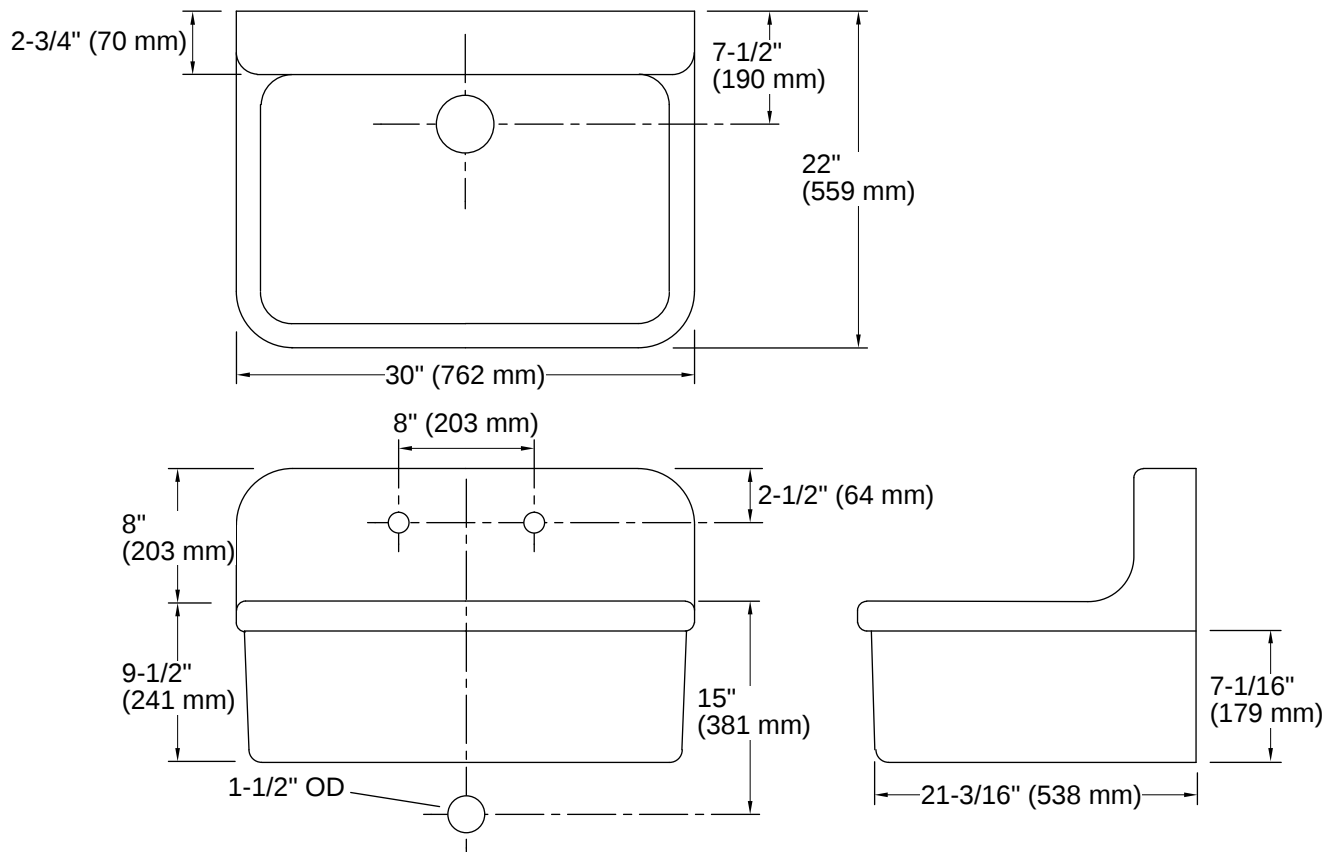

Installation

- Wall-mount or top-mount apron-front

Installation Notes

Install this product according to the installation instructions.

Product dimensions are nominal and may vary per ASME A112.19.2 tolerances.

