

Location:



Tub-Shower System S-5502

Specification Submittal



Feature Highlights

- Symmons Tub and Shower System with lever handle
- Symmons Temptrol® pressure-balancing mixing valve with adjustable stop screw to limit handle turn
- Screwless escutcheon
- Secondary integral diverter/volume control handle
- Showerhead #552SH three mode, 4 inch diameter
- Showerhead arm and flange
- Standard flow rate is 2.5 gpm (9.5 L/min)
Optional lower flow rate restrictor available
- Tub spout, #552TS
- Polished chrome finish (standard)

Model Numbers

- S-5502
Tub-Shower System with Symmons Temptrol® mixing valve p/n S-46-2-BODY
- S-5502-TRM
Trim only, mixing valve ordered separately
- S-46-2-BODY
Symmons Temptrol® mixing valve without trim
- S-46-2X-BODY
Symmons Temptrol® mixing valve without trim. Valve includes integral service stops to allow water shut-off for service

Finish Options / Modifications

Append appropriate -suffix to model number

- STN Satin Nickel
- SBZ Seasoned Bronze
- Polished Chrome (standard finish)

Standards / Certifications

ASME A112.18.1/CSA B125.1



Options / Modifications


Append appropriate -suffix to model number

-  -1.5 1.5 gpm (5.7 L/min) flow restrictor
- 2.0 2.0 gpm (7.6 L/min) flow restrictor
- IPS 1/2" female IPS connections
-  -LP Loop handle
-  -LR Lever handle
- L/HD Less Showerhead
- REB Rebuild trim kit, includes TA-10 and TA-4
- REV Reverse coring, hot on right, cold on left, for back to back installations
- SS Slip spout on any tub/shower unit
- VP Vandal resistant escutcheon screws in place of standard screws
- X Integral service stops - allows water shutoff at valve for service
- X-CHKS Integral check stops - for use in installations where a positive shut-off device is used downstream of mixing valve

Warranty

- Limited Lifetime - to the original end purchaser in consumer installations
- 5 years - for commercial installations

Dimensions Elm Tub-Shower System, S-5502

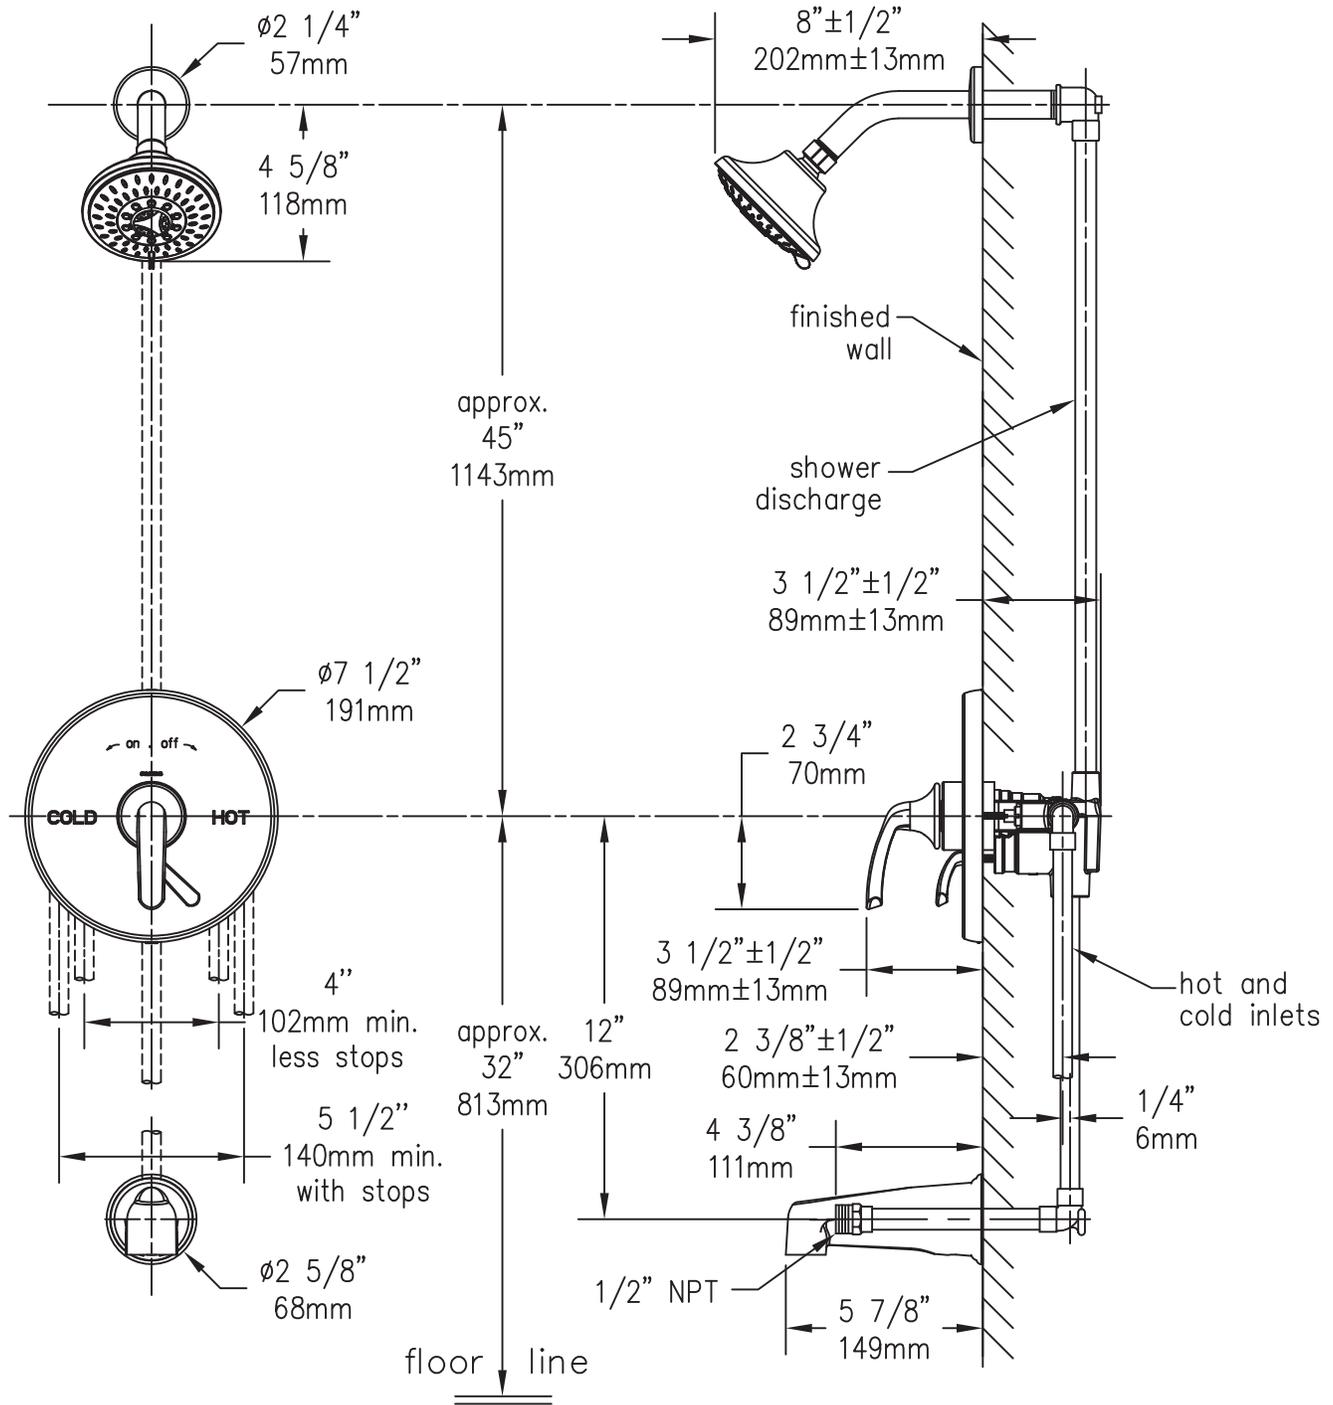

Note: Dimensions subject to change without notice