




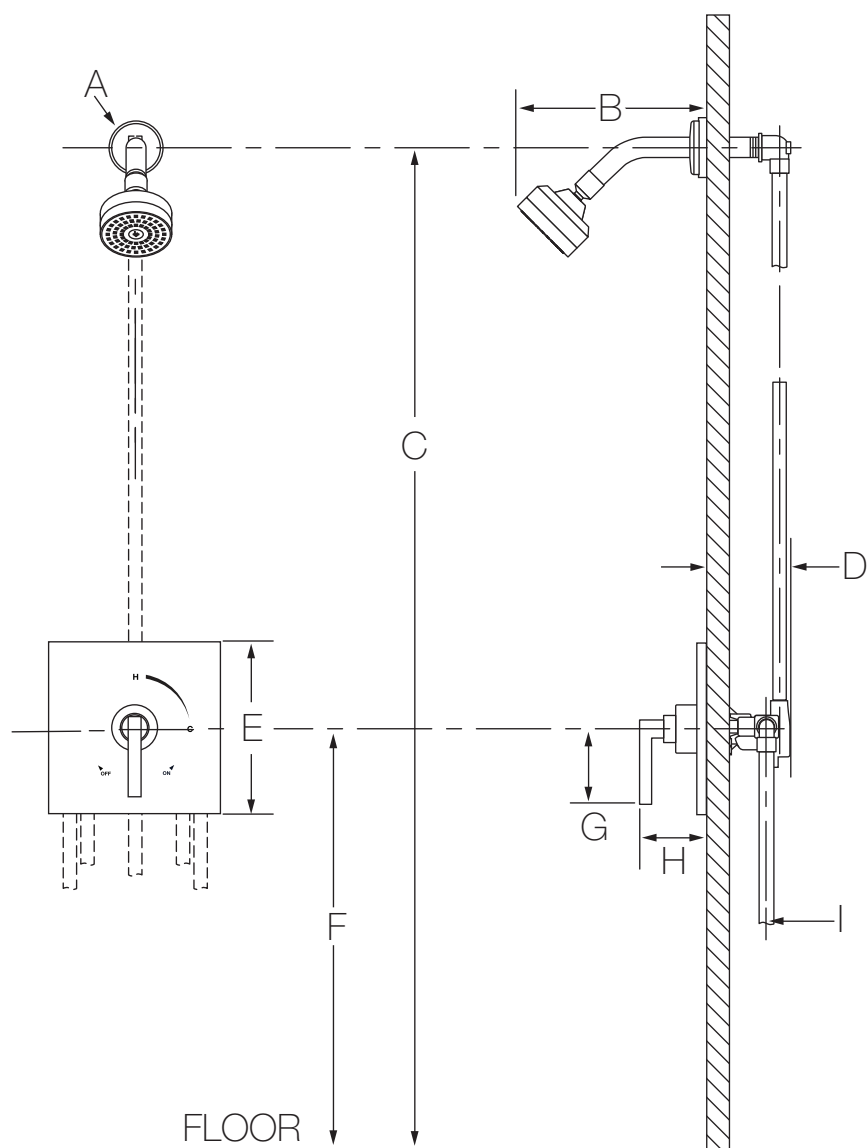


3601
Shower System
Specification Submittal




Feature Highlights	Options/Modifications cont.
<ul style="list-style-type: none"> • Metal lever handle • Adjustable stop screw to limit handle turn • 1 mode showerhead • 2.5 gpm (9.5 L/min) standard flow restrictor • Tub spout not included • Components shall be metal and nonmetallic construction, plated in standard polished chrome finish 	<div> <input type="checkbox"/> -BBZ <i>Brushed Bronze finish (available 2018)</i> </div> <div> <input type="checkbox"/> -MB <i>Matte Black finish (available 2018)</i> </div> <div> <input type="checkbox"/> -STN <i>Satin Nickel finish</i> </div> <p>Note: Append appropriate -suffix to model number.</p>
Model Numbers	Compliance
<div> <input type="checkbox"/> 3601 Shower System with Symmons Temptrol® 4-port pressure balancing mixing valve </div> <div> <input type="checkbox"/> 46-2-BODY Symmons Temptrol 4-port pressure balancing mixing valve </div> <div> <input type="checkbox"/> 46-2X-BODY Symmons Temptrol 4-port pressure balancing mixing valve with integral service stops </div>	<div>- ASME A112.18.1/CSA B125.1</div> <div>  </div>
Options/Modifications	Warranty
<div> <input type="checkbox"/> -1.5  <i>1.5 gpm (5.7 L/min) flow restrictor</i> </div> <div> <input type="checkbox"/> -2.0 <i>2.0 gpm (7.6 L/min) flow restrictor</i> </div> <div> <input type="checkbox"/> -IPS <i>1/2" female IPS connections</i> </div> <div> <input type="checkbox"/> -L/HD <i>Less showerhead</i> </div> <div> <input type="checkbox"/> -REB <i>Rebuild trim kit, includes TA-10 and TA-4</i> </div> <div> <input type="checkbox"/> -REV <i>Reverse coring, hot on right, cold on left, for back to back installations</i> </div> <div> <input type="checkbox"/> -SH1  <i>Alternative 352SH Dia showerhead</i> </div> <div> <input type="checkbox"/> -SH2  <i>Alternative 352SH-3, 3 mode showerhead (Chrome and Satin Nickel finish only)</i> </div> <div> <input type="checkbox"/> -SH4  <i>Alternative 361SH square showerhead</i> </div> <div> <input type="checkbox"/> -TRM <i>Trim only, valve must be ordered separately</i> </div> <div> <input type="checkbox"/> -VP <i>Vandal resistant escutcheon screws in place of standard screws</i> </div> <div> <input type="checkbox"/> -X <i>Integral service stops - allows water shutoff at valve for service</i> </div> <div> <input type="checkbox"/> -X-CHKS <i>Integral check stops - for use in installations where a positive shut-off device is used downstream of mixing valve</i> </div>	<p>Limited Lifetime - to the original end purchaser in consumer/residential installations. 5 Years - for industrial/commercial installations. Refer to www.symmons.com/warranty for complete warranty information.</p>

Dimensions




Measurements	
A	Ø 2-1/2", 64 mm
B	6", 152 mm
C	Ref. 77", 1956 mm
D	3-1/2", 89 mm
E	Sq. 7-1/2", 191 mm
F	Ref. 42", 1067 mm
G	3-1/8", 79 mm
H	3-1/2", 89 mm
I	Rough-in 2-3/8" ± 1/2", 60 mm ± 13 mm
J	6-3/4", 171 mm
K	6-3/4", 171 mm
L	5-5/8", 143 mm



-SH1



-SH2



-SH4



Notes:

- 1) Plaster shield (p/n T-176) for dry wall, plaster or other type walls 1/2" or greater.
- 2) Do not install positive shut-off device/devices that do not allow the valve to flow at least 1.5 gpm to valve outlets.
- 3) All dimensions measured from nominal rough-in (see I as reference).
- 4) Dimensions subject to change without notice.