

SPECIFICATIONS


OPULENCE™ TWO HANDLE MINI-WIDESPREAD LAVATORY FAUCET

Model

D303157

Description

- Ceramic disc valves
- 7 1/2" spout height, 6 1/4" spout length, laminar flow
- Includes metal touch down drain DA505918 with color matching cap and flange and chrome plated tailpiece
- 360° spout swivel
- 3 hole mount, 4" - 8" installation
- 1.2gpm (4.5L/min) maximum flow rate @60 psi
- Meets CEC Requirement

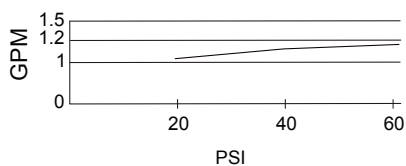Flow Rate

NSF/ANSI 372

• NSF/ANSI 372

MEETS ASME
A112.18.1M/A112.18.1

• ASME A112.18.1M/A112.18.1





- ADA Accessibility Guidelines for Buildings and Facilities - 309.4 Operation for Operable Parts

Warranty

Danze products are covered by a manufacturer's limited "lifetime" warranty for manufacturing defects.

Finishes Available

- Chrome
- Other: Refer to Price List for additional finish

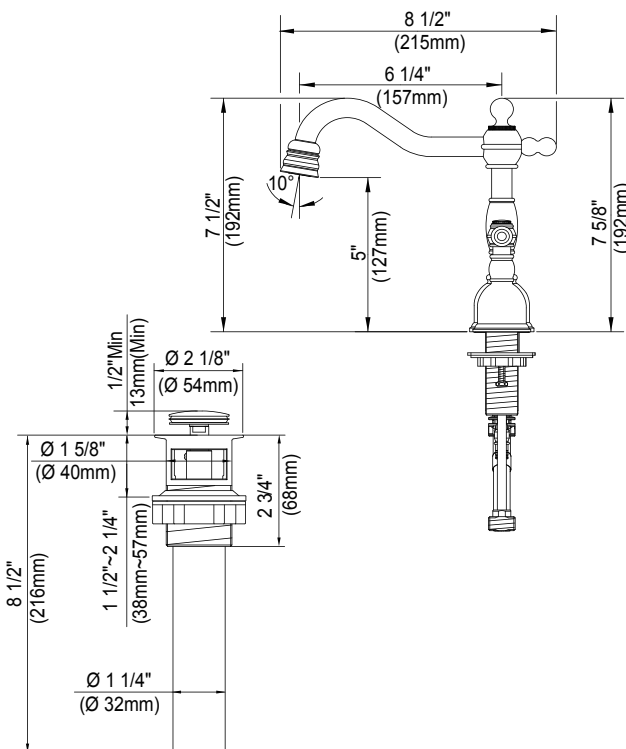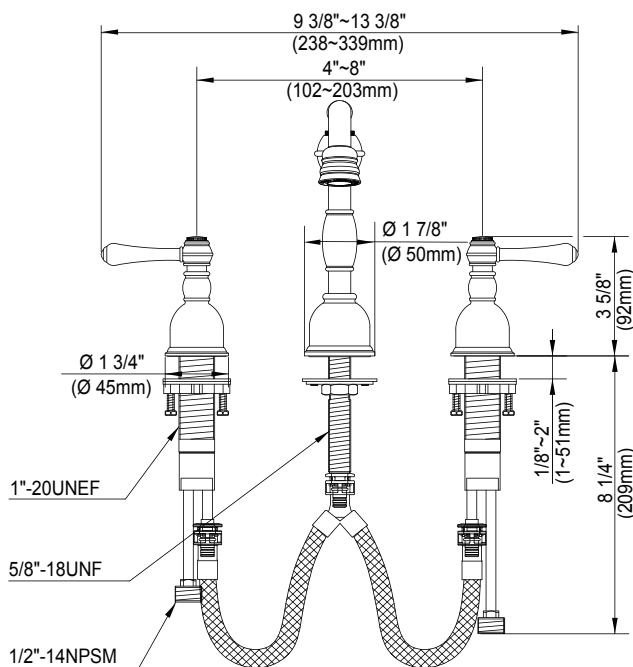

Submittal Information:

Job Name: _____

Location: _____

Contractor: _____

Contact #: _____