


- GT533-TDC Finish(C)
- GT533-TDD Finish(D)
- GT533-TDS Finish(S)
- GT533-TDY Finish(Y)

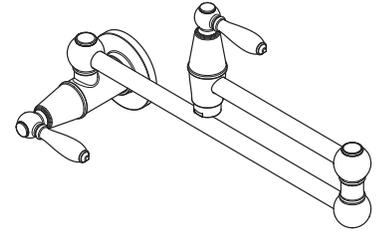

Specifications

Features

- 3.0 GPM Flow Rate
- 1-Hole Installation
- All Metal Construction
- 360° Rotating Spout
- Dual Shut Off Levers
- Mounting Hardware Included
- Swing Out Design
- Cold Water Installation Recommended
- Pforever Seal Ceramic Disc Valve
- Pforever Warranty®


Code Compliance

Pfister products are designed and manufactured in compliance with the following standards and codes:

- IAPMO Certified
- CSA B125 Certified
- ASME A112.18.1
- NSF 61/9 & 372 (Low Lead)
- ADA Compliant-ANSI A117.1 (Lever handles only)



Dimensions

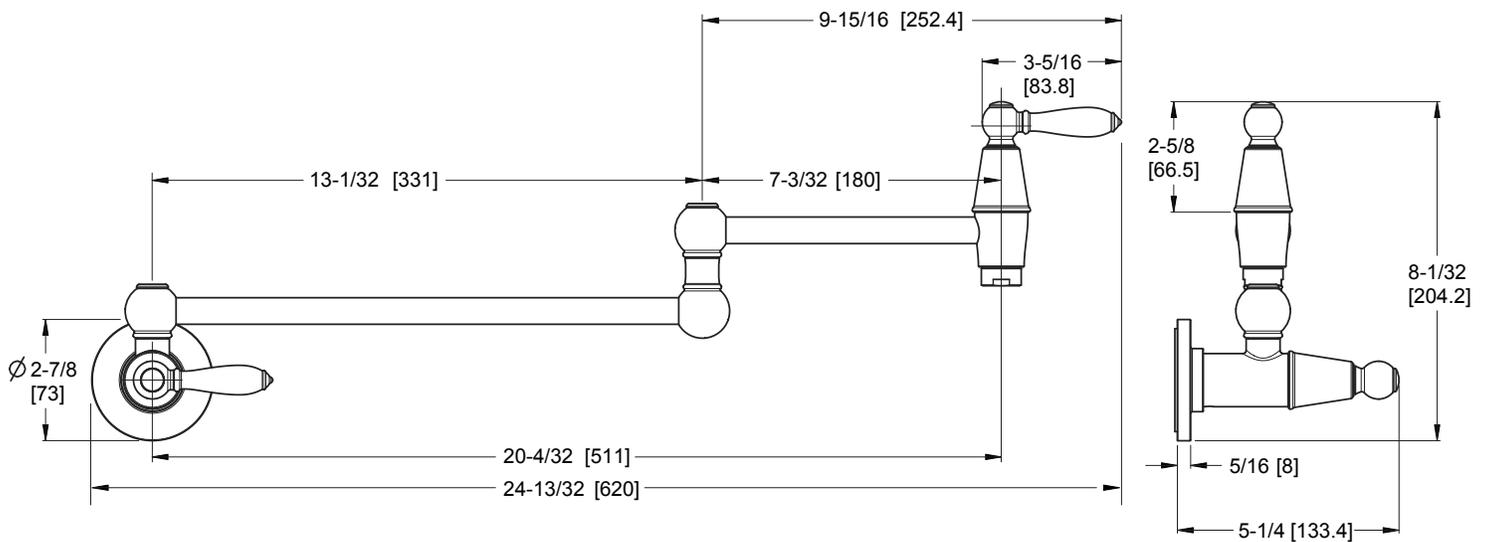

Ø1-3/8 Min to Ø1-1/2 Max. Deck Hole Openings