

Supurr-Flex® pure aluminum, multi-layered flexible metallic duct - UL Listed, Clothes Dryer Transition Duct



F0 Duct



Supurr-Flex® Clothes Dryer Transition Duct

Model No.	Description
F0405B	Supurr-Flex® multi-layered flexible duct
F0408B	Supurr-Flex® multi-layered flexible duct
FC0405B	Supurr-Flex® multi-layered flexible duct
FC0408B	Supurr-Flex® multi-layered flexible duct
F0405MSX/30	Supurr-Flex® multi-layered flexible duct
F0408MSX/30	Supurr-Flex® multi-layered flexible duct

Performance Data

for uninsulated aluminum, multi-layered flexible metallic duct

Maximum Velocity

- 5000 FPM / 25m/sec

Maximum Rated Pressures

- all diameters 10" W.C./ 2.5Kpa Pos.
- 3"-6" dia. (7.6-15.2cm), .5" W.C./12 Kpa Neg.



Operating Temperature Range

- 0 F to 265 F/-18C to 130C Intermittent "F0"
- UL Listed Clothes Dryer Transition Duct
UL standard No.: 2158A

General Information

- available in 4"(101mm) dia and lengths of 5'(1.5m) and 8'(2.4m)
- UL Listed on this product is for installations of 8 ft. (2.4m) or less
- best for clothes dryer duct, fresh air intake and non-insulated ventilation duct
- fire resistant

Pressure Loss Diagram

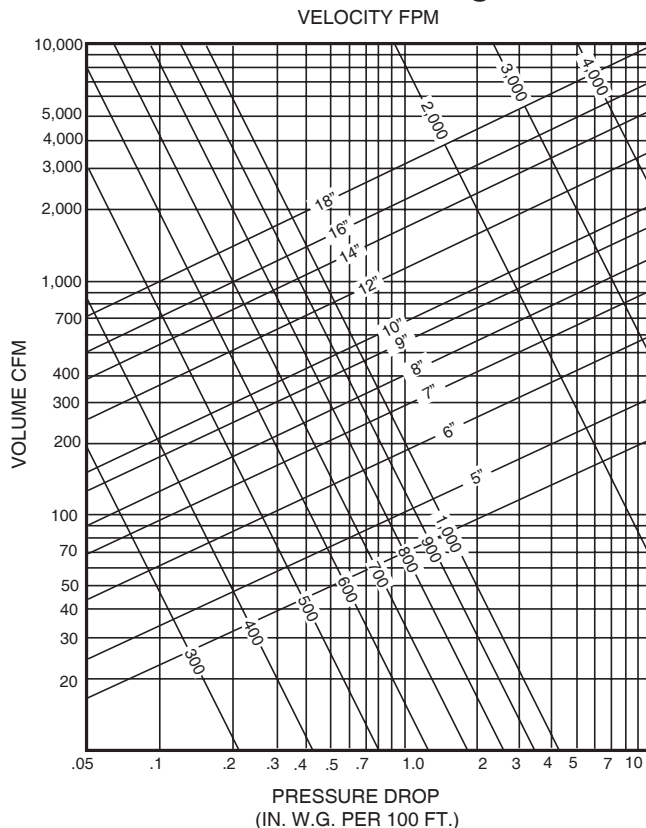

Clamps available with FC0405B & FC0408B



Clamps available with F0405MSX/30 & F0408MSX/30



Model No.	A	length	notes
F0405B	4" dia.(10.2cm)	5'(1.5m)	
F0408B	4" dia.(10.2cm)	8'(2.4m)	
FC0405B	4" dia.(10.2cm)	5'(1.5m)	with plastic clamps
FC0408B	4" dia.(10.2cm)	8'(2.4m)	with plastic clamps
F0405MSX/30	4" dia.(10.2cm)	5'(1.5m)	with metal spring clamps
F0408MSX/30	4" dia.(10.2cm)	8'(2.4m)	with metal spring clamps