KOHLER®

Features

- Vitreous china
- 12" (30.5 cm) rough-in
- 2" (5.1 cm) glazed trapway
- Combination toilet
- Polished chrome trip lever
- Ingenium_® flushing system
- Less seat and supply
- With right-hand trip lever (-RA)
- Elongated bowl
- 1.6 gpf (6 lpf)
- 10-3/4" (27.3 cm) x 9" (22.9 cm) water area
- 29" (73.7 cm) x 17" (43.2 cm) x 29-1/4" (74.3 cm)

Codes/Standards Applicable

Specified model meets or exceeds the following:

• ASME A112.19.2/CSA B45.1



PINOIR

ELONGATED TOILET

Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

Accessories

- 0: White
- CP: Polished Chrome
- PB: Vibrant_® Polished Brass
- Other: Refer to Price Book for additional colors/finishes

Specified Model

Description	Trip Leve	r Colo	ors/Finishes
Elongated bowl toilet	left-hand	0 🗆	Other
Elongated bowl toilet	right-hand	0 🗆	□ Other
		0	□ Other
•			□ Other
	Elongated bowl toilet Elongated bowl toilet A Elongated bowl toilet A Ccessories Cachet _® Quiet-Close™ elongated toilet seat	Elongated bowl toilet left-hand A Elongated bowl toilet right-hand Inded Accessories Cachet _® Quiet-Close™ elongated toilet seat	Elongated bowl toilet left-hand 0 A Elongated bowl toilet right-hand 0 Inded Accessories Image: Comparison of the second

Product Specification

The elongated combination toilet shall be made of vitreous china. The toilet shall be The toilet shall have 29''(73.7 cm) in length, 17''(43.2 cm) in width, and 29-1/4''(74.3 cm) in height with $10-3/4''(27.3 \text{ cm}) \times 9''(22.9 \text{ cm})$ water area. The toilet shall be 12''(30.5 cm) rough-in. The toilet shall have 2''(5 cm) glazed trapway. The toilet shall be 1.6 gpf (6 lpf) with Ingenium_® flushing system. The toilet shall include polished chrome trip lever. The toilet shall be less seat and supply. The toilet shall include right hand trip lever (-RA) option. The toilet shall be Kohler Model K-3482-_____ or K-3482-RA-_____.


PINOIR®

Technical Information

Installation N	otes
----------------	------

Install this product according to the installation guide.

Fixture:		
Configuration	two-piece, elongated	
Water per flush	1.6 gal (6 L)	
Passageway	2″ (5.1 cm)	
Water area	10-3/4″ (27.3 cm) x 9″ (22.9 cm)	
Water depth from rim	6″ (15.2 cm)	
Seat post hole centers	5-1/2" (14 cm)	
Included components:		
Bowl	K-4276	
Tank, left-hand	K-4609	
Tank, right-hand	K-4609-RA	
Tank cover	1015137	
Trip lever, left-hand	85085	
Trip lever, right-hand	1007913	
Bolt cap accessory pack	1013092	

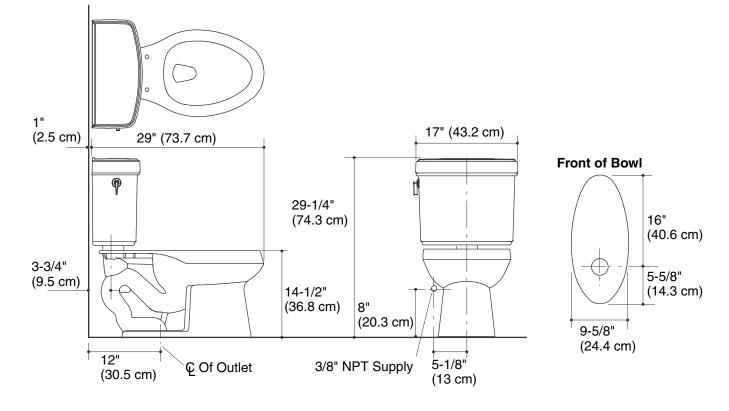

Product Diagram

