

Highline®

Concealed Trapway Two-piece Toilet K-76301-RA

Features

- Vitreous china.
- Comfort Height® Elongated bowl.
- Class Five® flushing system.
- Includes right-hand polished chrome trip lever.
- 1.28 gpf (4.8 lpf).
- Concealed trapway.
- 2-1/8" (54 mm) fully glazed trapway.
- Clean Caps[™] low-profile bolt caps.
- 12" (305 mm) rough-in.
- Less seat and supply.
- 10-5/8" (269 mm) x 8" (203 mm) water area.
- 29-3/4" (756 mm) x 18" (457 mm) x 31-1/4" (794 mm).
- Floor mount / Floor outlet.

Recommended Accessories

K-4636 Toilet Seat K-4731-C Commercial Heavy-duty Toilet Seat K-7637 Angle Supply with Stop (single)

Components

Product includes:

K-80020 Comfort Height® Elongated Bowl

K-5311-RA Toilet Tank

Additional included component/s: Tank cover, Trip lever, and Floor Mounting Kit.





ADA CSA B651

Codes/Standards

ASME A112.19.2/CSA B45.1 DOE - Energy Policy Act 1992 EPA WaterSense® California Energy Commission (CEC) ADA ICC/ANSI A117.1 CSA B651

KOHLER® One-Year Limited Warranty

See website for detailed warranty information.

Available Color/Finishes

Color tiles intended for reference only.


| Color | Code | Description |
|-------|------|-------------|
| | 0 | White |
| | 96 | Biscuit |
| | 47 | Almond |





Highline®

Concealed Trapway Two-piece Toilet K-76301-RA

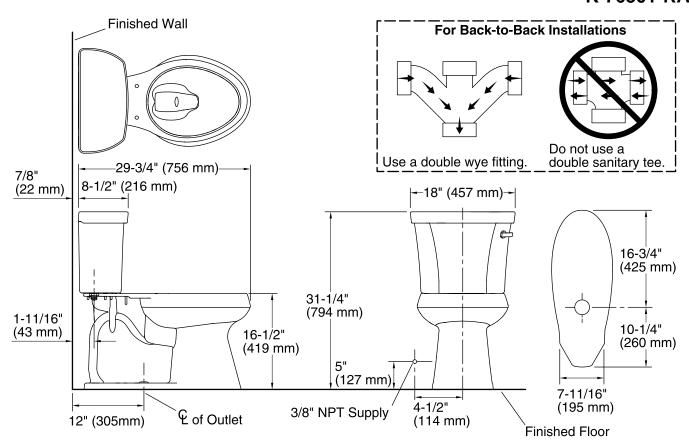

Technical Information

All product dimensions are nominal.

Toilet type: Two-piece

Bowl shape: Elongated front

Flush type: Class Five Trap passageway: 2-1/8" (54 mm)

Water Consumption

Full: 1.28 gpf (4.8 lpf)

Water surface size: 10-5/8" x 8" (269 mm x 203 mm)

Rim to water surface: 5-3/8" (137 mm)
Rough-in: 12" (305 mm)
Seat-mounting holes: 5-1/2" (140 mm)

Notes

Install this product according to the installation instructions.

For back-to-back toilet installations: Use only a 45 degree double wye fitting.

ADA, CSA B651 compliant when installed to the specific requirements of these regulations.

The Model Plumbing Codes require the installation of elongated open-front toilet seats on public bathrooms.

