

QSERIES

Quiet Fire Protection Air Compressors

QUIET Fire Protection Air Compressors for Dry Pipe & Pre-Action Sprinkler Systems

- Significant Decibel Reduction
- Oil-Less Piston Compressor
- UL Listed, Pre-Set Pressure Switch
- Fully Automatic, Direct Drive
- ASME Pressure Safety Valve
- Bubble Tight Air Check Valve
- Pre-Wired & Pre-Tested
- Lifetime Technical Support

**Riser Mounted
Units Include:**
Mounting Bracket
& 30" Stainless
Steel Flex Hose



**Tank Mounted
Units Include:**
30" Stainless
Steel Flex Hose
& Vibration Pads



Fill Capacity (gal) *	Maintenance Capacity (gal) *	Model Number	Decibel Rating (dBA)	Average CFM **	Motor HP	Amperage (amps)		Recommended Wire Size (gauge)			Unit Weight (lbs)
						FLA	Start Up	25' Run	50' Run	100' Run	

Standard Riser Mount (40 PSI in 30 minutes)

135	1000	QL13525AC	65	1.66	1/4	5.6	33.6	12	12	12	30
250	2000	QL25050AC	68	2.72	1/2	6.5	39.0	12	12	10	37

Low Pressure Riser Mount (20 PSI in 30 minutes)

280	1000	QL28025AC-LP	65	1.66	1/4	5.6	33.6	12	12	12	30
530	2000	QL53050AC-LP	68	2.72	1/2	6.5	39.0	12	12	10	37

High Pressure Riser Mount (40 PSI in 30 minutes - Max Pressure 100 PSI)

135	1000	QL13525AC-HP	65	1.66	1/4	5.6	33.6	12	12	12	30
250	2000	QL25050AC-HP	68	2.72	1/2	6.5	39.0	12	12	10	37

Standard Tank Mount (40 PSI in 30 minutes)

135	1000	QL13525ACT	65	1.66	1/4	5.6	33.6	12	12	12	93
250	2000	QL25050ACT	68	2.72	1/2	6.5	39.0	12	12	10	100

High Pressure Tank Mount (40 PSI in 30 minutes - Max Pressure 100 PSI)

135	1000	QL13525ACT-HP	65	1.66	1/4	5.6	33.6	12	12	12	93
250	2000	QL25050ACT-HP	68	2.72	1/2	6.5	39.0	12	12	10	100



* System Capacity Based on 70°F system temp.

** Average CFM is the average free air delivery from 0 to 40 PSIG.

VOLTAGE: All Units are 115 Volt / Single Phase

 WARNING: Cancer and Reproductive Harm - www.p65warnings.ca.gov

Riser Mount Units

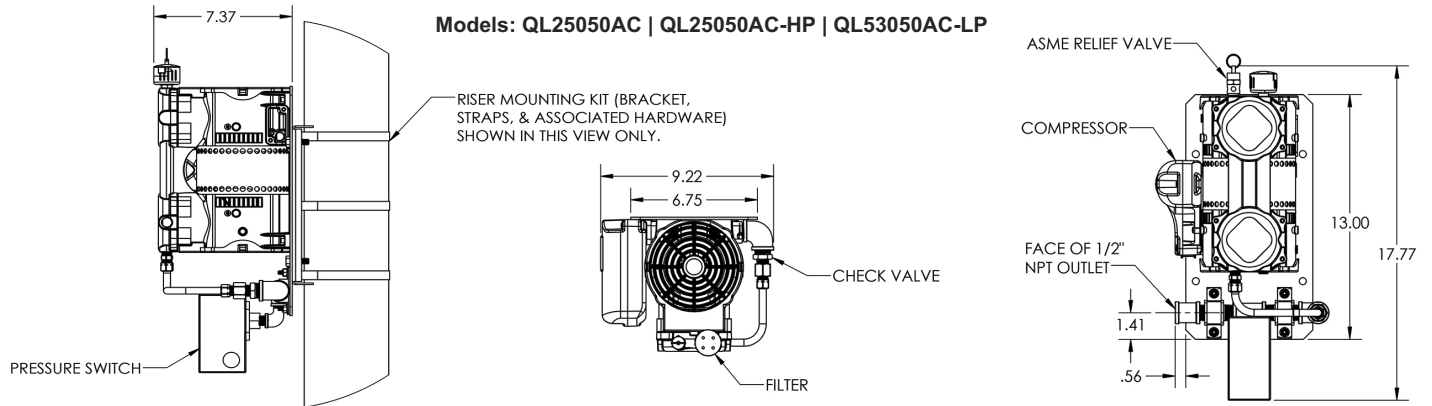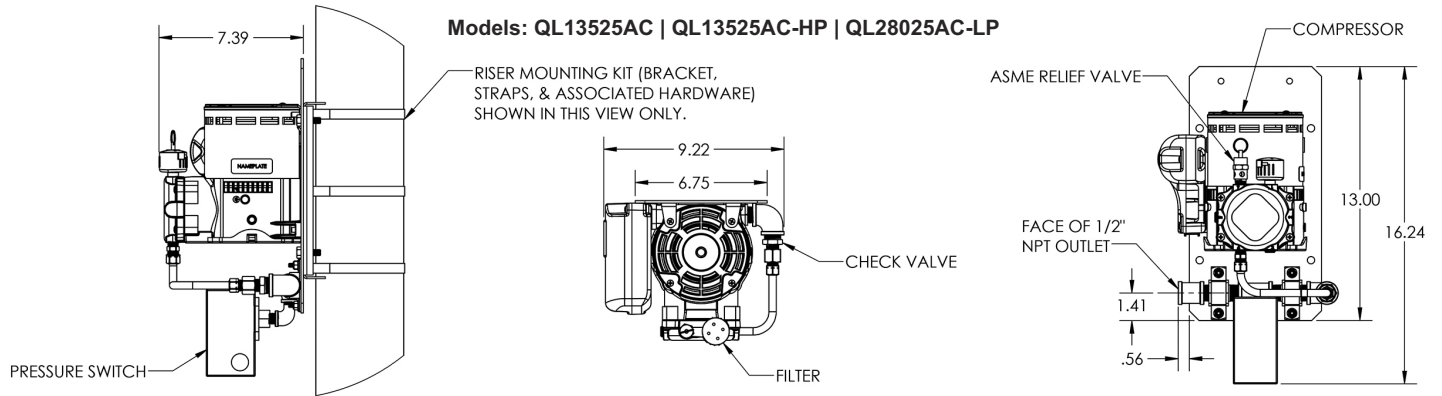

Tank Mount Units

