



Submitted Model No.: _ **Specific Features:**

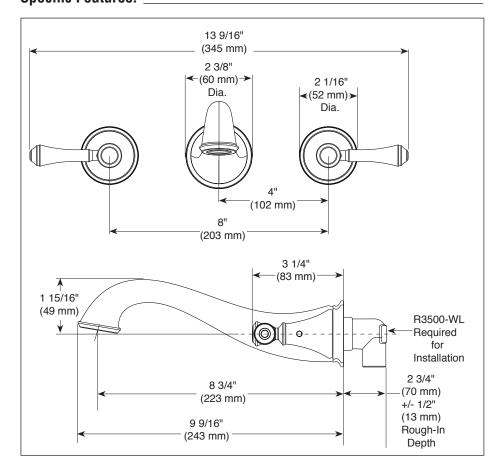

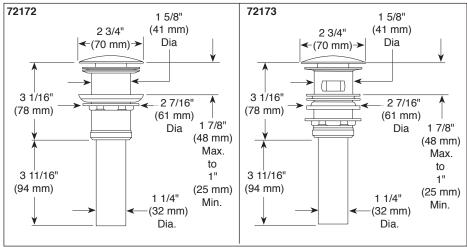

▲ Designate proper finish suffix

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.deltafaucet.com for finish options and product availability.



AVATORY FAUCETS

- Cassidv[™] Series Bath Collection
- Two Handle

STANDARD SPECIFICATIONS:

- Maximum 1.20 gpm @ 60 psi, 4.54 L/min @ 414 kPa
 Three hole wall mount
- Cast brass body
- 1/4 turn handle stops
- Control mechanism shall be of the rotating cylinder type with ceramic discs and 90° rotation.

 1/2"-14 NPT threaded female inlets
 Rough-in R3500-WL required for installation

- Purchase drain separately
- Accomodates wall thicknesses from 1/8" to 1 1/8"

WARRANTY

- Lifetime limited warranty on parts (other than electronic parts and batteries) and finishes; or for commercial users, for 5 years from the date
- 5 year limited warranty on electronic parts (other than batteries); or for commercial users, for 1 year from the date of purchase. No warranty is provided on batteries



COMPLIES WITH

- ASME A112.18.1/CSA B125.1
- ASME A112.18.2 / CSA B125.2

Indicates complicates ICC / ANSI A1 17.1 Indicates compliance to

- EPA WaterSense®
- Verified compliant with .25% weighted average Pb content regulations.



55 E. 111th Street, Indianapolis, Indiana 46280 350 South Edgeware Road, St. Thomas, ON N5P 4L1 © 2016 Masco Corporation of Indiana