


TOTO®

MS604114CEF(G) Ultramax® II One-Piece Toilet, 1.28 GPF




MS604114CEF(G) - Ultramax® II One-Piece Toilet with SoftClose® Seat

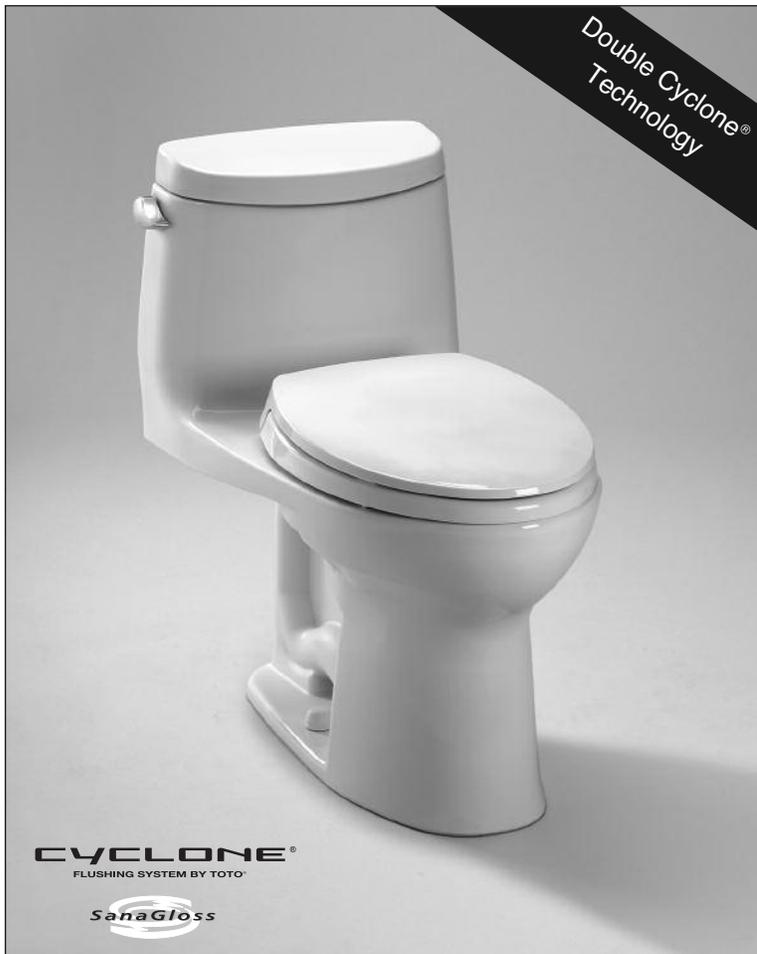

Double Cyclone® flushing system with maximum cleaning action for a cleaner, more hygienic toilet bowl.



Complete with SoftClose® toilet seat, or upgrade to a Washlet®.



Fast Flush: New, wide 3" flush valve is 125% larger than conventional 2" flush valves.



SanaGloss® glaze seals the surface, creating a finish that actually repels stains caused by buildup of mineral deposits.



- Sleek high profile one piece design
- Double Cyclone® Technology
- Powerful, quiet flush every time
- SanaGloss® technology: Super smooth, ion barrier glazing helps keep your toilet clean
- Wide, 2-1/8" computer designed trapway
- Large water surface
- Universal height.

High profile one piece toilet. Low consumption (1.28Gpf/4.8Lpf) Cyclone flushing action.

Tank cover, fittings, polished chrome trip lever, and SoftClose® seat included.

■ **MS604114CEFG**
Elongated ADA compliant toilet with SoftClose® seat
(Available in: #01, #03, #11, #12)

■ **MS604114CEF**
Same as MS604114CEFG, Less SanaGloss® ceramic glaze
(Available in: #51)

□ **SS114**
SoftClose® Seat and lid gently close with a touch of a hand. Elongated, closed front seat with lid.

TOTO USA, Inc. recommends the use of a nationally listed, double sanitary tee-wye only, in vertical waste stacks, in accordance with the stipulations noted in the majority of nationally recognized plumbing codes.

 **ADA Compliant**
For installation condition with approach from the left hand side.

Colors:
Standard #01 Cotton, #11 Colonial White
#12 Sedona Beige, #03 Bone

Trip Lever:
Standard #CP Chrome Plated
Optional See price book for additional finishes

MS604114CEF(G)

Ultramax® II One-Piece Toilet, 1.28 GPF

■ PERFORMANCE

The TOTO® Double Cyclone® system offers outstanding commercial grade performance. The TOTO® low consumption one piece toilet received high ratings during ANSI/ASME testing at independent laboratories. Designed with a powerful siphon jet flushing action, the bowl offers a large water surface and a 100% glazed trapway.

■ SPECIFICATIONS

Water Use: 4.8 Lpf/1.28 Gpf
 Flush System: Gravity Feed
 (Cyclone® Technology)
 Min. Water Pressure: 8 psi (Static)
 Water Surface: 7-1/8" x 9-1/8"
 Trap Dia.: 2-1/8"
 Rough-in: 12"
 Trap Seal: 2-3/8"
 Warranty: One Year Limited Warranty
 Material: Vitreous China

Shipping Weight: **MS604114CEF(G)**
 99 lbs.

Shipping Dimensions:

MS604114CEF(G)
 32"L x 19-7/8"W
 x 27-3/4"H

Fixture dimensions and hydraulic performance meet or exceed ANSI/ASME standard A112.19.2 and CAN/CSA B45 requirements.

Listing / Approvals: c-UPC, City of Los Angeles, State of Massachusetts, and others.


Watersense compliant.

Meets and exceeds ASME A112.19.2 standards for drainline carry distance with a 2% grade and 4" I.D. pipe.



Meets the American Disabilities Act Guidelines and ANSI A117.1 requirements where installed so top of seat is 17"-19" from the finished floor. For installation condition with approach from the left hand side.

These dimensions and specifications are subject to change without notice.

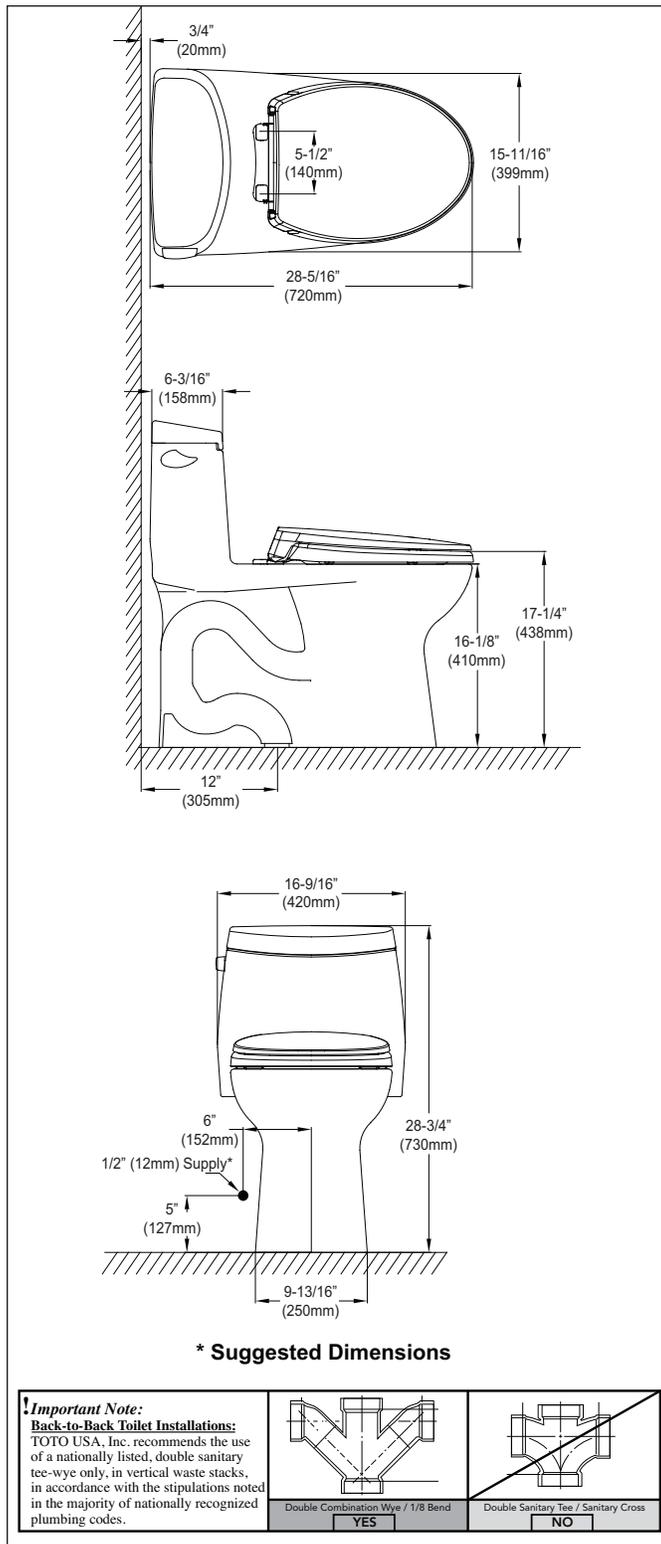

MS604114CEF(G) - Ultramax® II One-Piece Toilet with SoftClose® Seat



TOTO U.S.A., INC. • 1155 Southern Road, Morrow, GA 30260
 Tel. (888) 295-8134 • Fax. (770) 282-8701 • www.totousa.com
 Printed in U.S.A. © TOTO LTD. 03/08 #A10450

Printed on recycled paper

REV 03/09