## 

# MS604114CUFG

## UltraMax<sup>®</sup> II 1G One-Piece Toilet, 1.0 GPF

#### FEATURES

- Double Cyclone<sup>®</sup> flushing system, ultra-high efficiency (1.0GPF/3.8LPF)
- SanaGloss glaze minimizes debris, mold and bacteria from sticking to porous, ceramic surfaces
- Universal Height
- Decorative one-piece design with high-profile tank
- Elongated front bowl with SoftClose<sup>®</sup> seat (SS114)
- 12" rough-in
- Chrome trip lever

#### MODELS

 MS604114CUFG With SanaGloss ceramic glaze, SS114 SoftClose seat included (#01)

#### COLORS/FINISHES

• #01 Cotton

#### PRODUCT SPECIFICATION

The one-piece, ultra-high efficiency Double Cyclone flushing system toilet shall be 1.0GPF/3.8LPF. Toilet shall have SanaGloss ceramic glaze and be at Universal Height. Toilet shall have high-profile tank, elongated front bowl with SoftClose seat and Chrome trip lever. Toilet shall be **TOTO Model MS604114CUFG\_**.



SanaGloss

#### CODES/STANDARDS

- Meets and exceeds [ASME A112.19.2] CSA B45.1
- Certifications: IAPMO(cUPC), EPA Watersense, State of Massachusetts, City of Los Angeles, and others
- Code compliance: UPC, IPC, NSPC, NPC Canada, and others
- Legislative Compliance: California AB715, California Green Building Code, City of Los Angeles Water Efficiency Ordinance
- ADA compliant (when installed with trip lever located on the approach side)



### MS604114CUFG

#### UltraMax<sup>®</sup> II 1G One-Piece Toilet, 1.0 GPF


#### **SPECIFICATIONS**


- Water Use 1.0 GPF/3.8LPF
- Flush System
  Double Cyclone<sup>®</sup>
- Min. Water Pressure 8 psi (static)
- Water Surface 7-1/8" x 9-1/8"
- Trap Diameter 2-1/8"
- Rough-in
- 12"
- Trap Seal 2-1/8"
- Warranty One Year Limited Warranty
- Material Vitreous china
- Shipping Weight 99 lbs.
- Shipping Dimensions 32"L x 20"W x 17-3/4" H<sup>1</sup> x 28-3/4" H<sup>2</sup>

#### INSTALLATION NOTES

Back-to-Back Toilet Installations:

TOTO recommends the use of a nationally listed, double sanitary tee-wye only, in vertical waste stacks, in accordance with the stipulations noted in the majority of nationally recognized plumbing codes.

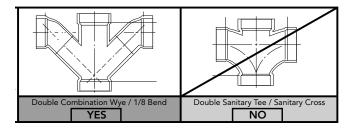

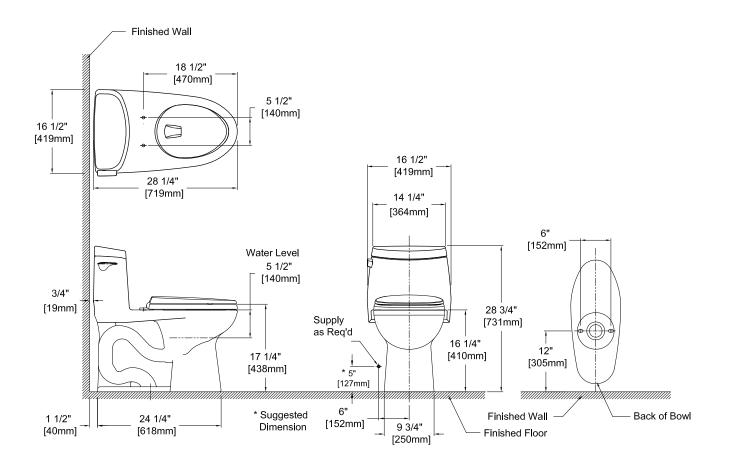

These dimensions and specifications are subject to change without notice