



LED Wraparound LWL Series

Features

This low profile, clean appearance, surface mounted wrap provides a wide distribution of light with a frosted white prismatic lens. It can be used in various applications including offices, corridors, garages, kitchens and public spaces. Fixture mounts to standard junction box (not included).

Construction

Housing is die-formed of 22-gauge steel. Standard mounting holes are included. Power supply connections can be made inside the fixture wire way or in a junction box (not included).

Finish

Housing is finished in lighting grade white baked gloss enamel paint.

Diffuser

Frosted white prismatic diffuser is made of engineered LED acrylic material.

Electrical

D1 Driver

Direct wired with a constant current low voltage electronic LED driver rated at 120 VAC. The driver is dimmable with a 2-wire (Triac) or electronic low voltage (ELV) dimmer switch.

D2 Driver

Direct wired with a constant current low voltage electronic LED driver rated for 120-277 VAC. LED driver is dimmable 0-10V DC.

MV Driver

Direct wired with a constant current low voltage electronic LED driver rated for 120-277 VAC. Non dimmable, only comes with 80 CRI LEDs.

Lamping

50,000 hr. long life replaceable LEDs produce 2500, 3000 or 5000 source lumens. 3000K or 4000K color temperature, 90 CRI min.

Certification

cETLus listed for damp locations.

ENERGY STAR® Qualified

*Title 24/JA8 Compliant

Warranty

Limited warranty: This fixture is free from defects in materials and workmanship for a period of 5 years from date-of-purchase.

Specifications and dimensions subject to change without notice.

LOCATION		DATE
PREPARED BY		QUANTITY
COMMENTS		FIXTURE TYPE
CATALOG NUMBER		




D1

Forward phase cut dimmer
DVCL-153P Lutron®

D2

120-277V
IP-710-DL Leviton®

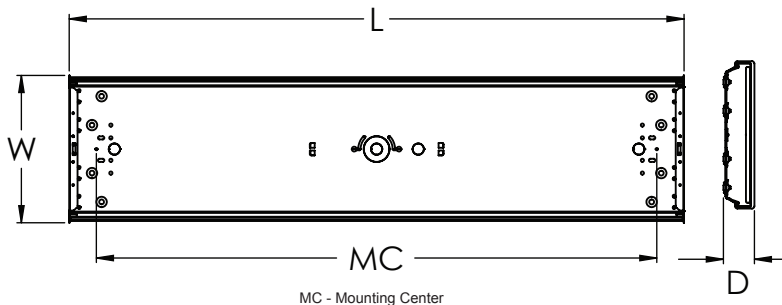

Ordering Information:

Warm White		LED	Source Lumens	CCT	L	W	H
LWL07242500L30D1		30W	2500	3000K	24"	7"	2-3/8"
LWL07483000L30D1		36W	3000	3000K	48"	7"	2-3/8"
* LWL07485000L30D1		60W	5000	3000K	48"	7"	2-3/8"
LWL07242500L30D2		30W	2500	3000K	24"	7"	2-3/8"
* LWL07483000L30D2		36W	3000	3000K	48"	7"	2-3/8"
* LWL07485000L30D2		60W	5000	3000K	48"	7"	2-3/8"
Cool White		LED	Source Lumens	CCT	L	W	H
LWL07242500L40D1		30W	2500	4000K	24"	7"	2-3/8"
* LWL07483000L40D1		36W	3000	4000K	48"	7"	2-3/8"
LWL07483600L40MV		30W	3600	4000K	48"	7"	2-1/2"
LWL07485000L40D1		60W	5000	4000K	48"	7"	2-3/8"
LWL07242500L40D2		30W	2500	4000K	24"	7"	2-3/8"
LWL07483000L40D2		36W	3000	4000K	48"	7"	2-3/8"
LWL07485000L40D2		60W	5000	4000K	48"	7"	2-3/8"
LWL13487200L40MV		52W	6200	4000K	48"	11-1/2"	2-1/2"